MINI HiFi COMPONENT SYSTEM

RXD-501/501E/501W/551/551E/551W/571S/A5/ 701/701E/701W/751/751E/751W/771S/A8

SERVICE MANUAL

(XD-501~A8)**

KENWOOD

© 1998-3/B51-5420-00 (K/K) 3661

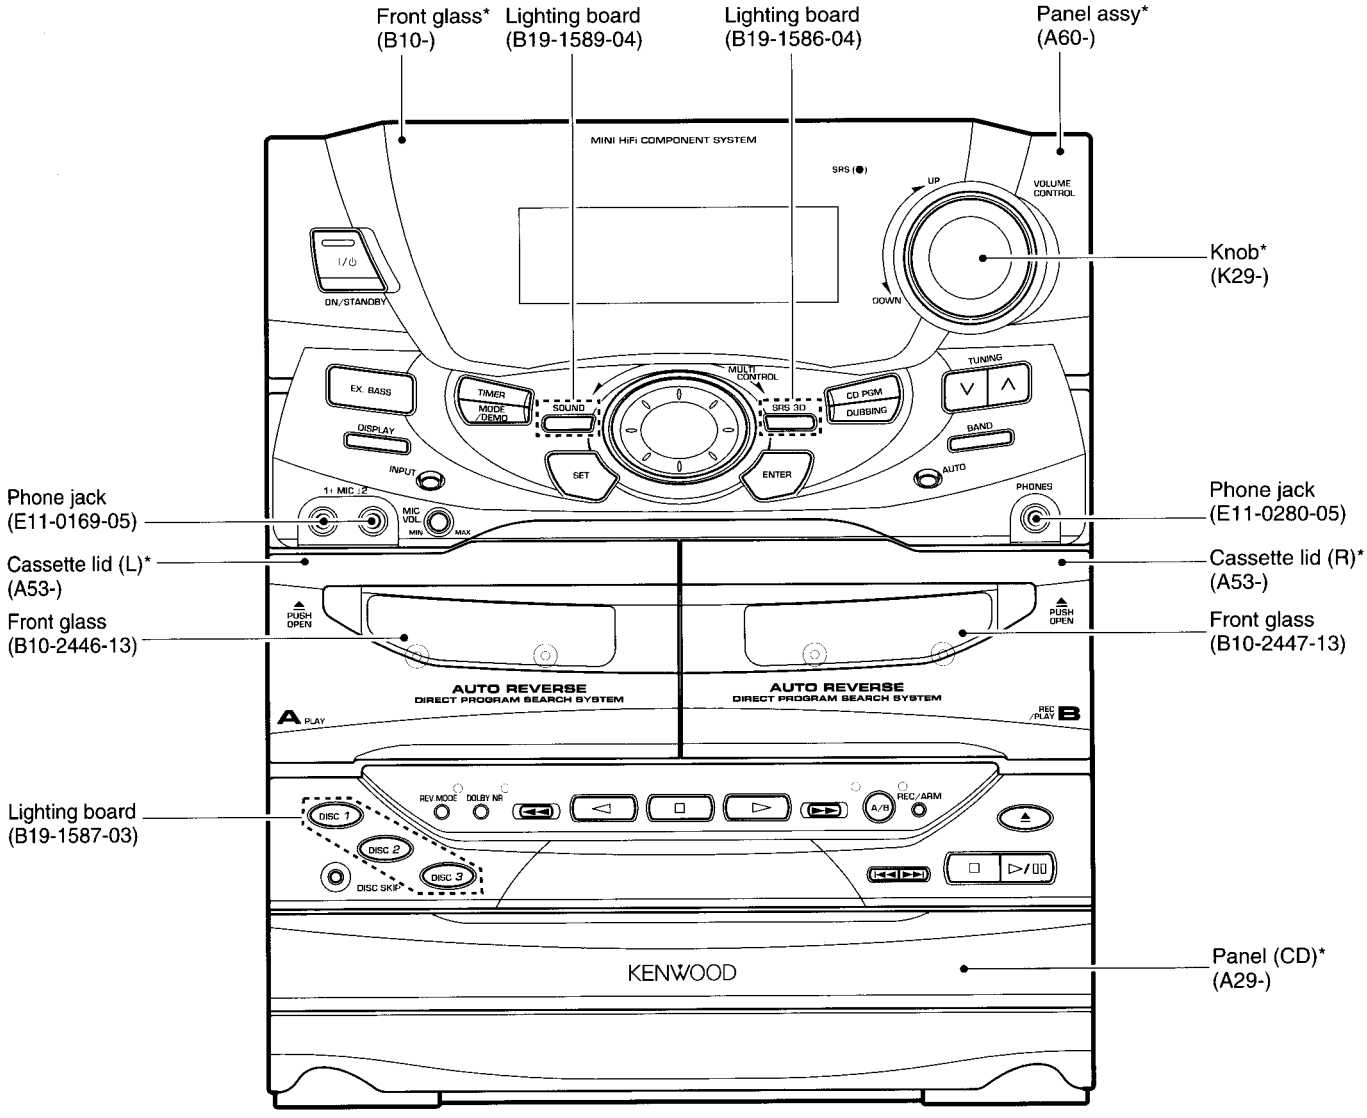

**Refer to page 2 if you want to know system configuration.

*** Refer to parts list on page 58.**

In compliance with Federal Regulations, following are reproductions of labels on, or inside the product relating to laser product safety.

KENWOOD-Crop. certifies this equipment conforms to DHHS Regulations No. 21 DFR 1040. 10, Chapter 1, Subchapter J.

DANGER : Laser radiation when open and interlock defeated. AVOID DIRECT EXPOSURE TO BEAM

Refer to RXD-500/700 (B51-5300-00), If you require TUNER preset frequency in detail.

RXD-501/551/571/A5/701/751/771/A8

CONTENTS / ACCESSORIES

Contents

CONTENTS / ACCESSORIES 2
EXTERNAL VIEW 3
DISASSEMBLY FOR REPAIR 4
BLOCK DIAGRAM 5
CIRCUIT DESCRIPTION 6
ADJUSTMENT 13
WIRING DIAGRAM 17
WIRING DIAGRAM 17
PC BOARD 19
SCHEMATIC DIAGRAM 27
EXPLODED VIEW 55
PARTS LIST 58
SPECIFICATIONS .....Back cover

Accessories

FM Indoor antenna
(T90-0801-05): KPXYMM2
(T90-0836-05): TEQE2



AM Loop antenna (T90-0833-05)



AM Loop antenna stand
(J19-3645-05)



AC plug adaptor (1)
(E03-0115-05)



Use to adapt the plug on the power cord to the shape of the wall outlet.
(Accessory only for regions where use is necessary.)

Speaker cords (4)
XD-A8/XD-7....Series
Speaker cords (2)
XD-A5/XD-5....Series



Attached with to speaker unit

Batteries (R6/AA)



Speaker cushion (8)



Remote control unit (1)
(A70-1201-05) :KPMXYM2

Battery cover (A09-0399-08)

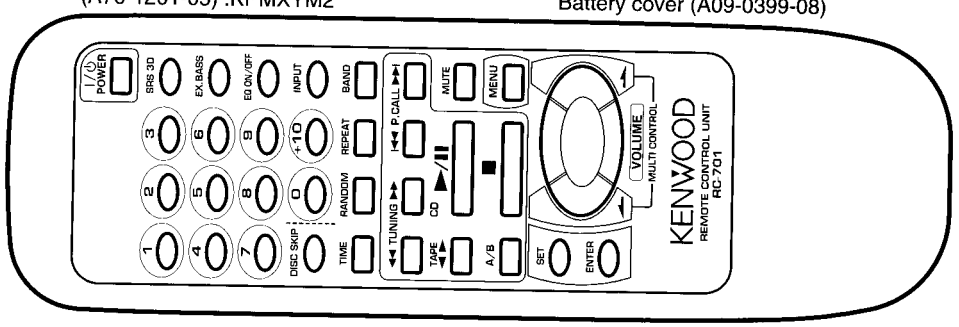

Remote control unit (1)
(A70-1202-05) : QETE2

Battery cover (A09-0399-08)

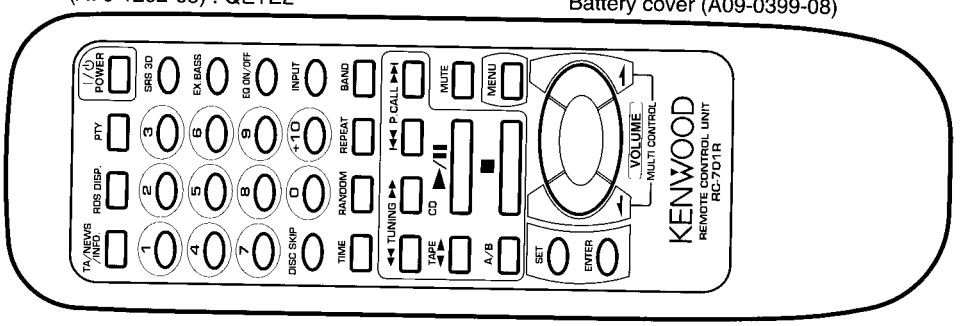

System configuration

SYSTEM	MAIN UNIT	SPEAKER	SP CORD PARTS NO.	DESTI-NATION
XD-501	RXD-501	LS-501	E30-5474-08	TE
XD-501	RXD-501	LS-501	E30-5475-05	X
XD-501W	RXD-501W	LS-501	E30-5474-08	Q
XD-501E	RXD-501E	LS-501	E30-5474-08	E2
XD-551	RXD-551	LS-551	E30-5475-05	MXY
XD-551	RXD-551	LS-551	E30-5474-08	TE
XD-551W	RXD-551W	LS-551	E30-5474-08	Q
XD-551E	RXD-551E	LS-551	E30-5474-08	E2
XD-571S	RXD-571S	LS-551	E30-5475-05	M2

SYSTEM	MAIN UNIT	SPEAKER	SP CORD PARTS NO.	DESTI-NATION
XD-A5	RXD-A5	LS-451	E30-5120-08	KP
XD-701	RXD-701	LS-701	E30-5471-05	TEX
XD-701W	RXD-701W	LS-701	E30-5471-05	Q
XD-701E	RXD-701E	LS-701	E30-5471-05	E2
XD-751	RXD-751	LS-751	E30-5471-05	MXYTE
XD-751W	RXD-751W	LS-751	E30-5471-05	Q
XD-751E	RXD-751E	LS-751	E30-5471-05	E2
XD-771S	RXD-771S	LS-751	E30-5471-05	M2
XD-A8	RXD-A8	LS-751	E30-5471-05	KP

EXTERNAL VIEW

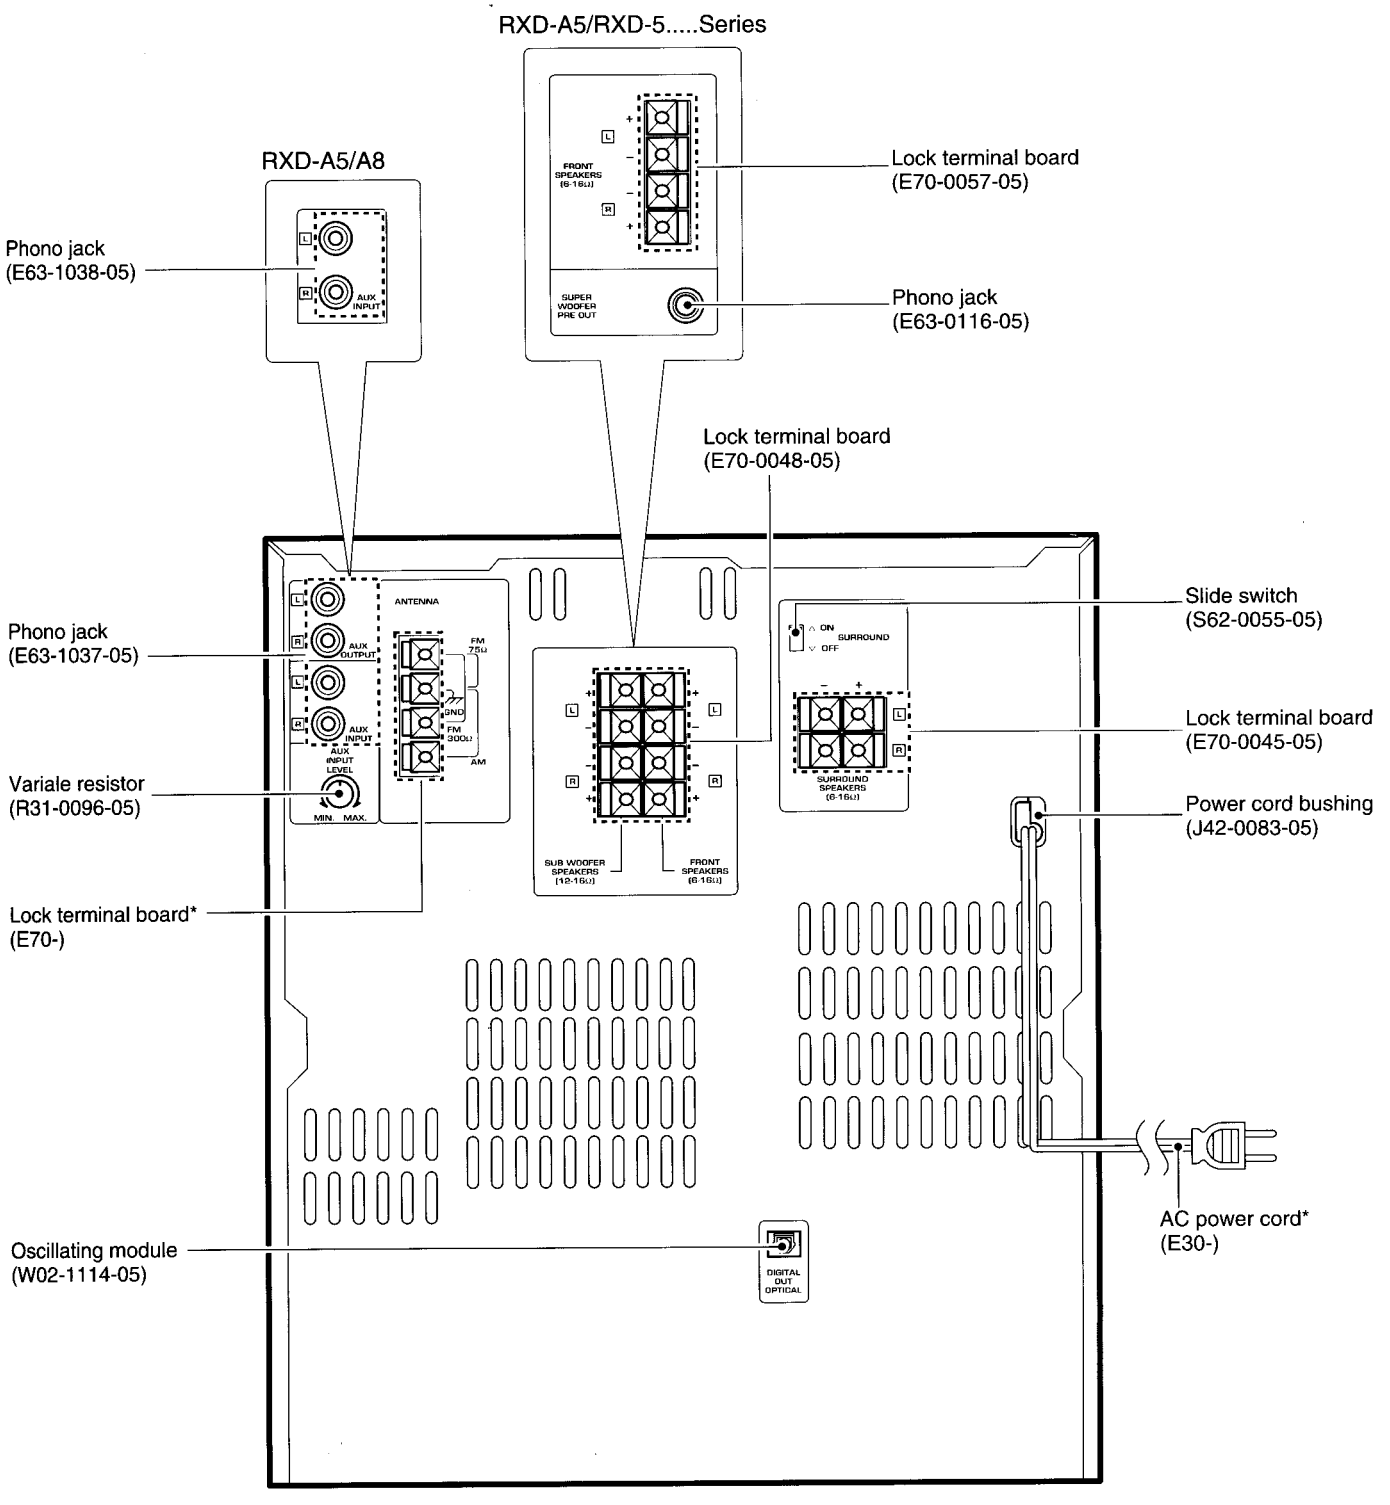

*** Refer to parts list on page 58.**

DISASSEMBLY FOR REPAIR

1. How to remove the front panel.

(1) Turn the power ON and then push the open/close key to open the tray.
(2) After removed the tray cover, push the open/close key to close the tray and then turn the power OFF.
(3) Remove the push rivet (①) and 4 screws (②, ③).
(4) The front panel can be separated by removing the 3 screws (④) located at the bottom plate of the front panel.

2. How to remove the CD mechanism

(1) Remove 4 screws (⑤) on the left side/right side of chassis.
(2) Remove 2 screws (⑥) and the cap (⑦) on the rear panel.
(3) Disengage the CD mechanism as FIG.2.

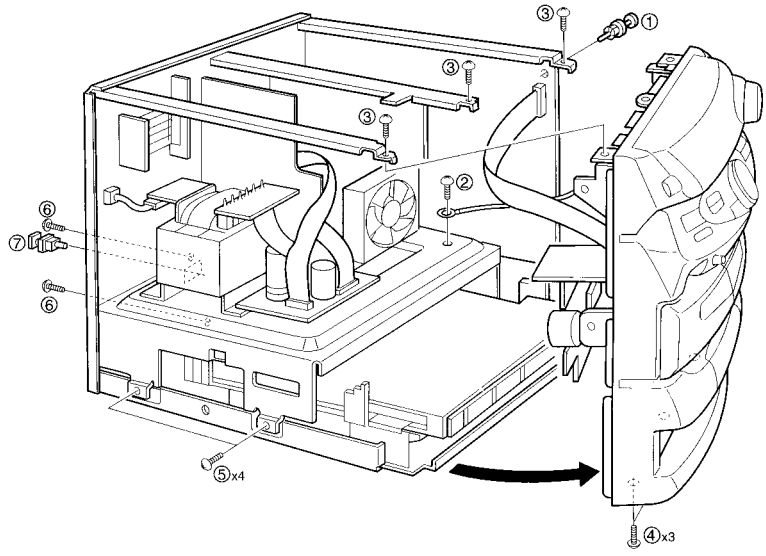

Fig.1

3. How to open the tray if not comes out.

(1) From the rear side of the CD mechanism, use a screw driver or the like to turn the friction arm fully counterclockwise.
(2) Pull out the tray front wards by hand when the tray comes just out.

* As for details of items in the below, refer to RXD-F3 service manual (B51-5091-00).
(1) How to detach the tray.
(2) How to attach the tray.
(3) Replacing the pickup.

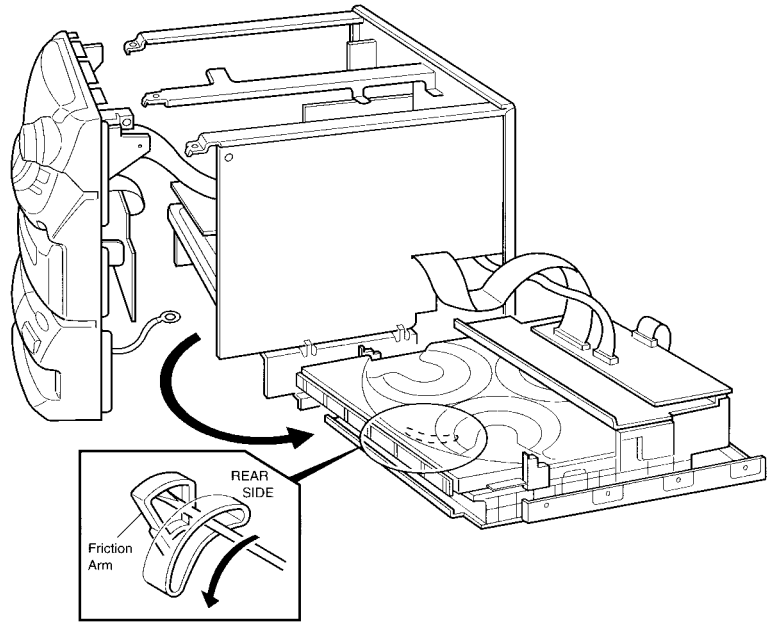

Fig.2

RXD-501/551/571/A5/701/751/771/A8

BLOCK DIAGRAM

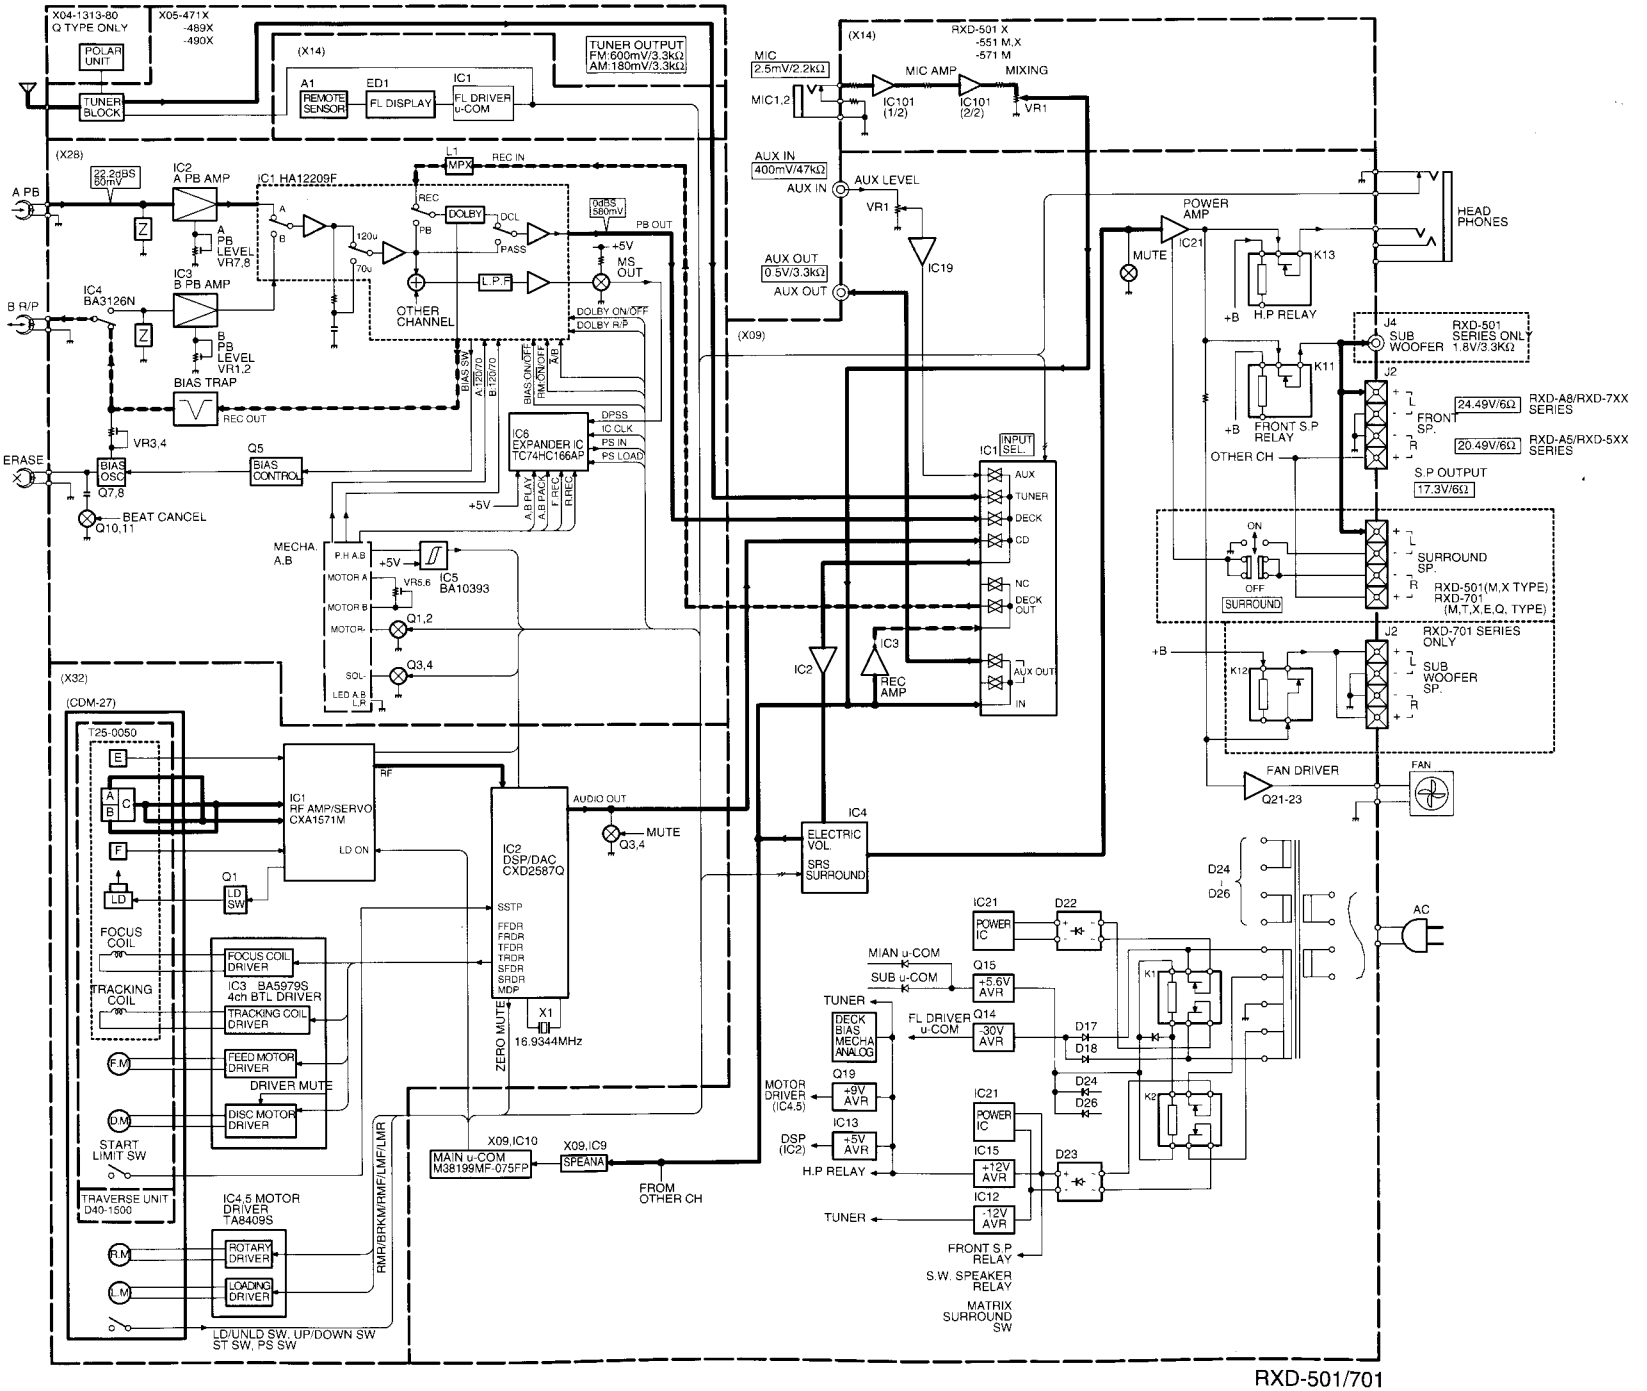

RXD-501/701

CIRCUIT DESCRIPTION

1. Initialization

1-1 Setting of initial conditions

While pressing the [ENTER] key, plug the AC cord into the AC power outlet.

1-2 Initializing operation

- A microcomputer is initialized for start when the AC power is turned on while pressing the [ENTER] key. At that time, CD mechanism and CASSETTE mechanism are also initialized.
- During the initial operation, the display shows "INITIALIZE" and after that the clock blinks up on display.

1-3 Initial items and back up data

	ITEMS	
AMP	※POWER	OFF
	※VOLUME	45
	※BALANCE	CENTER
	MUTING	OFF
	EQ	OFF (ROCK)
	※EQ. MANU	FLAT
	EX. BASS	ON
	※SRS 3D	OFF
	※S.W.	LEVEL 3 (RXD-701/751 ONLY)
TUNER	※INPUT SEL	TUNER
	※3D LEVEL	LEVEL +5
	※DEMO	ON
	※BAND	FM
	※LAST f	LOWEST FREQUENCY
	※LAST Pch	— —
	※AUTO/MONO	AUTO
	※Pch	TEST f
CLOCK TIMER	※CLOCK	AM 12 : 00
	※PROG ON	AM 12 : 00
	※PROG OFF	AM 12 : 00
	※PRO MODE	TIMER PLAY
	※SOURCE	TUNER
	※Pch	1
	※EXE	OFF
	※OTT	OFF
	SLEEP	OFF
DECK	※DIRECTION	FORWARD
	※RVS MODE	⊃
	※DOLBY NR	OFF
	A/B	B
CD	ACTIVE MODE	STOP
	PLAY MODE	TRACK
	REPEAT	OFF
	RANDOM	OFF
	PLAY MODE	STOP
	TIME	SINGLE

※back up data

1-4 Mechanism initialization

1-4-1 CD mechanism

- Disc unclamps (traverse down)
- Rotary tray rotates (1/3 rotation)
- If a mechanism error occurs, "C" is indicated on the display.

1-4-2 DECK mechanism

- When initial condition becomes NG for the third time, decide the error.
  The error condition is displayed as "X" on the display.

1-4-3 Error display

CD X ERR

CIRCUIT DESCRIPTION

2. Destination list of tuner

Destination	DSW 3(83pin)	2(84pin)	1(85pin)	(86pin)	Band	Receiving frequency range	Channel space	IF	RF	PORT 47
K1	0	0	0	0	FM	87.5MHz~108.0MHz	100kHz	+10.7MHz	25kHz	0
					AM	530kHz~1700kHz	10kHz	+450kHz	10kHz	0
K2	0	0	0	1	FM	87.5MHz~108.0MHz	100kHz	+10.7MHz	25kHz	1
					AM	530kHz~1610kHz	10kHz	+450kHz	10kHz	0
K3	1	0	0	1	FM	87.5MHz~108.0MHz	100kHz	+10.7MHz	25kHz	1
					MW	530kHz~1610kHz	10kHz	+450kHz	10kHz	0
					SW	5.9MHz~17.9MHz	5kHz	+450kHz	5kHz	0
E1	0	0	1	1	FM	87.5MHz~108.0MHz	50kHz	+10.7MHz	25kHz	0
					AM	531kHz~1602kHz	9kHz	+450kHz	9kHz	0
E3	1	0	1	1	FM	87.5MHz~108.0MHz	50kHz	+10.7MHz	25kHz	0
					MW	531kHz~1602kHz	9kHz	+450kHz	9kHz	0
					SW	5.9MHz~17.9MHz	5kHz	+450kHz	5kHz	0
E1 RDS	0	1	0	1	FM	87.5MHz~108.0MHz	50kHz	+10.7MHz	25kHz	0
					AM	531kHz~1602kHz	9kHz	+450kHz	9kHz	0
E2 RDS	0	1	1	0	FM	87.5MHz~108.0MHz	50kHz	+10.7MHz	25kHz	0
					MW	531kHz~1602kHz	9kHz	+450kHz	9kHz	0
					LW	153kHz~279kHz	9kHz	+450kHz	9kHz	0
Q	0	1	1	1	FML	65.0MHz~74.0MHz	10kHz	+10.7MHz	5kHz	1
					FMH	87.5MHz~108.0MHz	50kHz	+10.7MHz	5kHz	0
					MW	531kHz~1602kHz	9kHz	+450kHz	9kHz	0
					LW	153kHz~279kHz	9kHz	+450kHz	9kHz	0

3. Test mode

3-1 Test mode of the receiver

3-1-1 Setting of the test mode

While pressing the [INPUT] key or [Band] key, plug the AC power cord into AC outlet.

3-1-2 Canceling of the test mode

Unplug the AC power cord.

3-1-3 Condition in test mode

POWER • • • • • • ON

SELECTOR • • • AUX (in case of [INPUT] key)
TUNER (in case of [BAND] key)

FL, LED • • • • • All the fluorescent display indicators and LEDs light. (The all illuminated state is cleared by pressing any main unit key or remocon key.

EX. BASS • • • • • OFF

S.W. • • • • • • • • • OFF

3-1-4 Basic operation in test mode.

(1) The muting during mode selection is not controlled in the test mode.

(2) The test mode is cancelled when the AC power is turned OFF.

(3) The operation of the keys in the test mode, as follows.

3-1-5 The operation of the keys in the test mode.

(1) MODE / DEMO key

When this key is pressed in the test mode, all the fluorescent light off and normal display are indicated cyclically.

(2) DISC 1~3 keys

With the selector on AUX, when the DISC 1~3 keys are operated, the 3D level settings can be made as follows.

① DISC 1 • • • • 3D ON level -8 (Min)
② DISC 2 • • • • 3D ON level 0 (Center)
③ DISC 3 • • • • 3D ON level +8 (Max)

(3) DISC SKIP key (S level display)

With the selector on TUNER, the fluorescent changes cyclically as follows by pressing the [DISC SKIP] key.

① ATT is switched OFF. "ATT OFF XX"
② ATT is switched ON. "ATT ON XX"
③ ATT is switched OFF. Normal display
XX means A/D value (HEX) of S.

(4) CD STOP key

With the selector on TUNER, when the [CD STOP] key operated, the preset memory can be changed as 10 steps.

→10 - - →20 - - →30 - - →40 - - →00 (- -) →

(5) AUTO, TUNING UP/DOWN

With the selector on something other than TUNER, the E.Q (Flat, Min, Max) settings can be made by pressing the [AUTO] key and the tuning [UP] [DOWN] keys.

[AUTO] key	E.Q Flat
TUNING [DOWN] key	E.Q Min
TUNING [UP] key	E.Q Max

CIRCUIT DESCRIPTION

(6) CD SKIP UP/DOWN keys
With the selector on TUNER, the P. CALL is operated by pressing the skip UP/DOWN keys.

SKIP [UP] key	P.CALL up
SKIP [DOWN] key	P. CALL down

(7) CD OPEN/CLOSE keys
With the selector on TUNER, the channel space settings can be mad cyclically by pressing the OPEN/CLOSE keys with M version.

(8) REC/ARM
Whenever the REC/ARM key is pressed, the indication of S.W. (ON/OFF) is available.

4. Main microprocessor

4-1 Microprocessor periphery block diagram

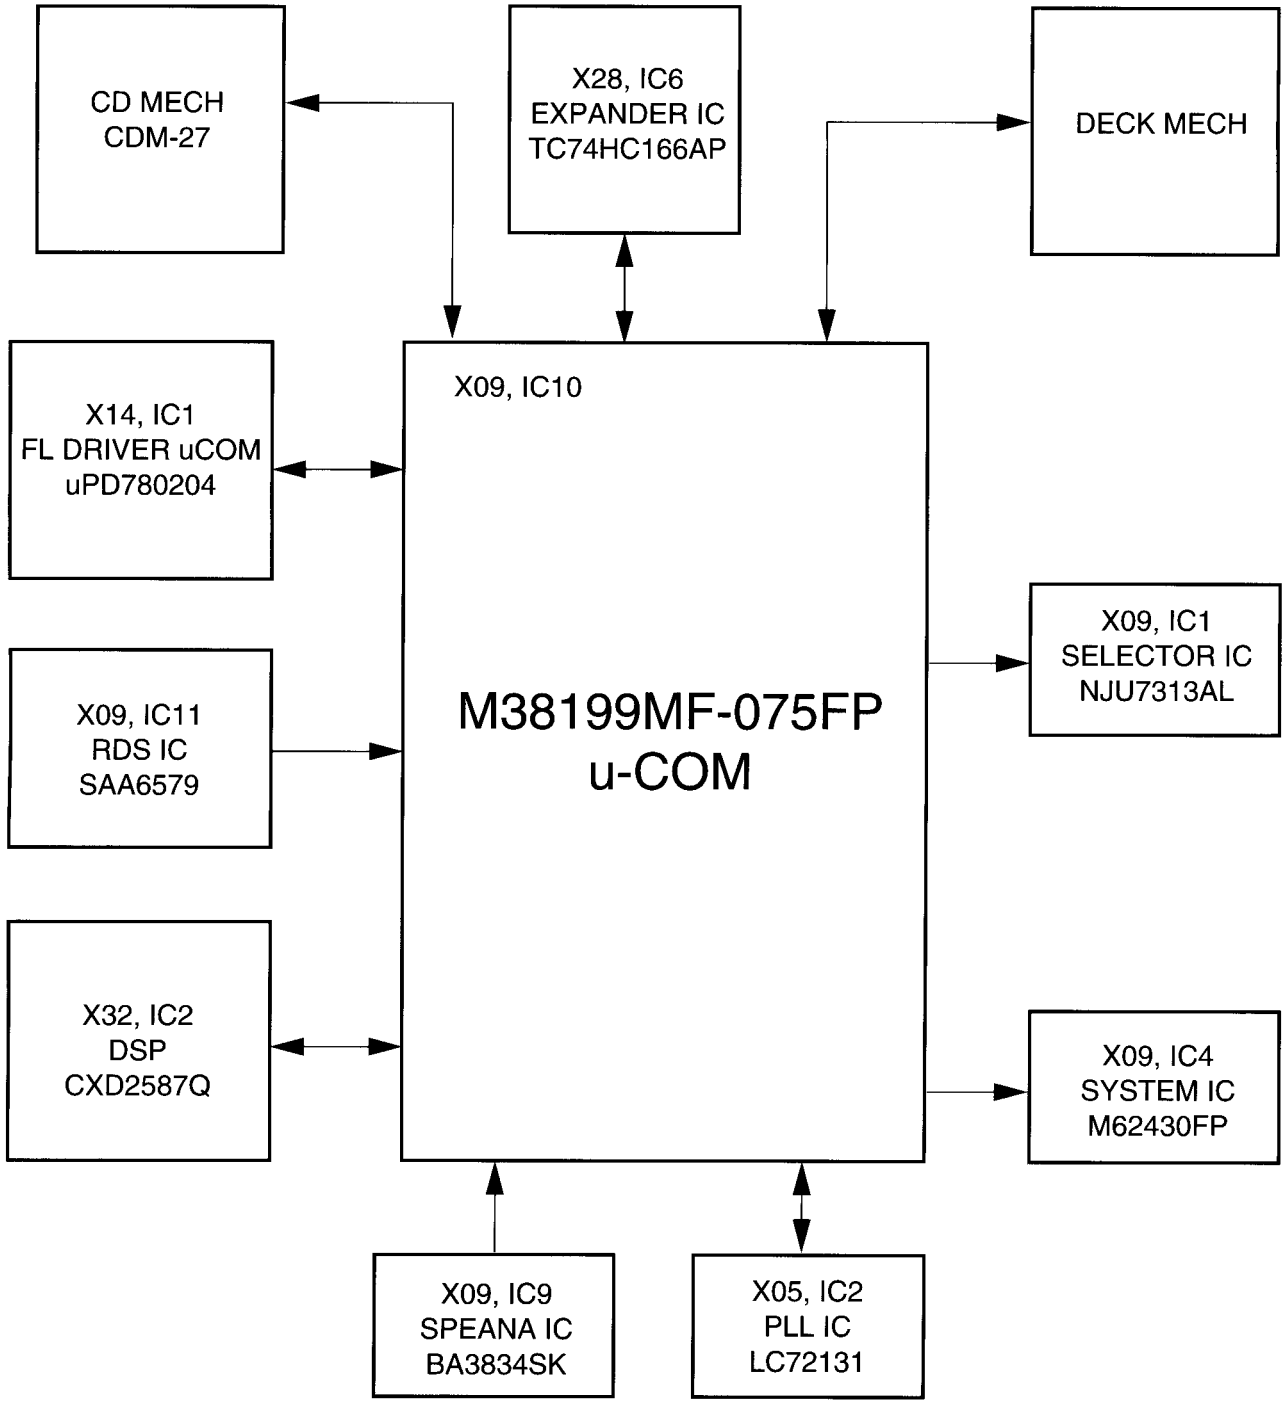

CIRCUIT DESCRIPTION

4-2 Pin description

Microprocessor : M38199MF-075FP (X09, IC10)

No	Name	I/O	Description		
1	PS IN	I	Parallel serial IC input data		
2	PS LOAD	O	Parallel serial IC load	H : SHIFT	L : LOAD
3	$\overline{\text{A MUTE}}$	O	Audio mute control	H : OFF	L : ON
4	BP IN	I	Speana input (A/D converter input)		
5	JOG CW	I	Jog input B		
6	JOG CCW	I	Jog input A		
7	ENC CW	I	Rotary encoder input B		
8	ENC CCW	I	Rotary encoder input A		
9	H.P.	I	Headphones switch input	H : ON	L : OFF
10	NC	I/O	No used		
11	$\overline{\text{CD RST}}$	O	CD DSP IC reset control (CXD2587Q)	H : NORMAL	L : RESET
12	DRV CLK	O	FL driver u-COM control clock		
13	DRV SI	O	FL driver u-COM control data output		
14	DRV SO	I	FL driver u-COM control data input		
15	S LEVEL	I	RDS S Level input		
16	RDS DATA	I	RDS data input		
17,18	NC	I	No used		
19	CD CK	O	CD DSP IC clock (CXD2587Q)		
20	SQCK	O	CD Sub code clock (CXD2587Q)		
21	CDDT	O	CD DSP IC data (CXD2587Q)		
22	SQSO	I	CD Sub code input (CXD2587Q)		
23	CDXL	O	CD latch output (CXD2587Q)		
24	SENS	I	CD sense input (CXD2587Q)		
25	CDSCK	O	Sense data reading clock output (CXD2587Q)		
26	$\overline{\text{LD ON}}$	O	CD laser output	H : OFF	L : ON
27	DATA	O	SELECTOR/SYSTEM/DAC/DOLBY IC data output		
28	CLK	O	SELECTOR/SYSTEM/DAC/DOLBY IC clock output		
29	PROT	I	Protection input	H : PROTECTION ON	L : NORMAL
30	SCOR	I	Sub code synchronism signal (CXD2587Q)		
31	E DATA	O	E. vol data output (M62430FP)		
32	E CLK	O	E. vol clock output (M62430FP)		
33	NC	I/O	No used		
34	RDS CLK	I	RDS clock input		
35	$\overline{\text{RESET}}$	I	Reset signal input	H : NORMAL	L : RESET
36	X CIN	I	Timer clock input (32.768kHz)		
37	X COUT	O	Timer clock output (32.768kHz)		
38	X IN	I	Main clock input (8.38MHz)		
39	X OUT	O	Main clock output (8.38MHz)		
40	VSS	–	GND		
41	$\overline{\text{PLL DO}}$	I	PLL data input		
42	$\overline{\text{STEREO}}$	I	Stereo detector input		
43	$\overline{\text{SD}}$	I	SD detector input		
44	$\overline{\text{CE}}$	I	Power failure input	H : AC ON	L : AC OFF
45	PLL CE	O	PLL IC chip enable (LC72131)		
46	TU EMP	O	FM emphasis change-over (M type only) Polar/Pilot change-over (Q type only)	H : 100kHz H : POLAR	L : 50kHz L : PILOT
47	FL RST	O	FL driver reset control output		

CIRCUIT DESCRIPTION

No	Name	I/O	Description		
48	T MUTE	O	TUNER mute control output		
49	DRV ST	O	FL driver u-COM control strobe output		
50	HP RLY	O	Headphones relay control		
51	SEL ST	O	Selector IC strobe output (NJU7313AL)		
52	ATT	O	E. vol attenuation	H : ON	L : OFF
53	SYS ST	O	System IC strobe output (M62430FP)		
54	CS RELAY	O	CS speaker relay control	H : ON	L : OFF
55	SP RELAY	O	Speaker relay control	H : ON	L : OFF
56	DOL ST	O	Dolby IC strobe output		
57	MON	O	PMON control	H : ON	L : OFF
58~61	NC	O	No used		
62	P RLY	O	Power relay control	H : ON	L : OFF
63	LMR	O	Loading motor control (reverse)		
64	LMF	O	Loading motor control (forward)	H : ON	L : OFF
65	RMF	O	Rotary motor control (forward)	H : ON	L : OFF
66	$\overline{\text{BRKM}}$	O	Rotary motor control (brake)	H : NORMAL	L : BRAKE
67	RMR	O	Rotary motor control (reverse)	H : ON	L : OFF
68	DC OFF	O	CD DSP IC power control (CXD2587Q)	H : ON	L : OFF
69	BEAT CANCEL	O	Beat cancel	H : ON	L : OFF
70	$\overline{\text{A/B}}$	O	A/B Playback change-over	H : B	L : A
71	BIAS	O	Bias change-over	H : ON	L : OFF
72	$\overline{\text{R MUTE}}$	O	Deck rec mute control	H : OFF	L : ON
73	NR	O	Dolby noise reduction change-over	H : ON	L : OFF
74	D-R/$\overline{\text{P}}$	O	Dolby rec/play change-over	H : REC	L : PLAY
75	R/$\overline{\text{P}}$	O	Rec/play change-over	H : REC	L : PLAY
76	B CPM	O	B deck motor control	H : ON	L : OFF
77	B SOL	O	B deck solenoid control	H : ON	L : OFF
78	A CPM	O	A deck motor control	H : ON	L : OFF
79	A SOL	O	A deck solenoid control	H : ON	L : OFF
80	SPE3	O	Speana out 3		
81	TU/SPE2	O	TUNER destination (scan)/speana out 2		
82	TYP/SPE1	O	Model discrimination (scan)/speana out1		
83~86	RET4~RET1	I	Model discrimination input 4~1 Discrimination of TUNER destination (DSW3~DSW0)		
87	A-PH	I	A deck photo sensor input		
88	B-PH	I	B deck photo sensor input		
89	UNL SW	I	CD unload switch	H : ON	L : OFF
90	$\overline{\text{LO SW}}$	I	CD load switch	H : OFF	L : ON
91	VCC	–	u-COM power supply (+5V)		
92	$\overline{\text{ST SW}}$	I	CD mechanism stop switch	H : OFF	L : ON
93	$\overline{\text{UP SW}}$	I	CD mechanism up switch	H : OFF	L : ON
94	$\overline{\text{DN SW}}$	I	CD mechanism down switch	H : OFF	L : ON
95	$\overline{\text{PS SW}}$	I	CD mechanism position switch	H : OFF	L : ON
96	$\overline{\text{CD MUT}}$	O	CD analog mute	H : OFF	L : ON
97	$\overline{\text{ZERO}}$	I	CD zero mute detection	H : MUTE OFF	L : MUTE ON
98	VEE	–	GND		
99	AVSS	–	A/D GND		
100	VREF	–	A/D reference voltage		

5. FL driver Microprocessor : uPD780204-038 (X14, IC1)

5-1Pin description

No	Name	I/O	Description
1	VDD	–	u-COM power supply (+5V)
2	LED DISC1	O	Disc LED 1~3 control
3, 4	NC	–	No used
5~9	LED A~E	O	CD running indicator control (D33~D37)
10	$\overline{\text{RESET}}$	I	System reset
11	X2	–	Main system clock (5MHz)
12	X1	I	Main system clock (5MHz)
13	VSS	–	GND
14	NC	–	No used
15	NC	–	GND
16	VDD	–	u-COM power supply (+5V)
17	DRIVER CLK	I	Serial clock
18	DRIVER SOUT	O	Serial data output
19	SIN	I	Serial data input
20,21	NC	–	No used
22	LED SRS	O	LED control terminal (SRS)
23	LED 3 STEREO	–	No used
24	LED PROLOGIC	–	No used
25	AVSS	–	GND
26	A/D7	–	GND
27~33	A/D6~A/D0	I	Key return signal (6~0)
34	AVDD	–	A/D power supply
35	AVREF	–	A/D reference voltage
36,37	NC	–	GND
38	REM IN	I	Remocon signal input
39	DRIVER ST	I	Strobe signal input
40	VSS	–	GND
41	LED EQ	O	LED control terminal (SOUND)
42~44	ECHO 3~1	–	No used
45	ECHO $\overline{\text{MUTE}}$	–	No used
46	VDD	–	u-COM power supply (+5V)
47	NC	–	No used
48~63	SEG16~SEG1	O	FL segment control (SEG16~SEG1)
64~70	SEG17~SEG23	O	FL segment control (SEG17~SEG23)
71~78	SEG24~SEG31	O	FL segment control (SEG24~SEG31)
79	VLOAD	–	Vload (-30V)
80~88	SEG32~SEG40	O	FL segment control (SEG32~SEG40)
89~100	1G~12G	O	FL grid control (1G~12G)

CIRCUIT DESCRIPTION

6. Input expander IC (parallel-serial)

• X28, IC6 (TC74HC166AP)

Pin No.	Name	I/O	Description		
1	–	I	+5V		
2	–	I	N. C.		
3	DPSS	I	DECK DPSS DETECTION	H = MUSIC	L = NO MUSIC
4	A-PLAY	I	A DECK PLAY SW	H = NOT PLAY	L = PLAY
5	A-PACK	I	A DECK PACK DETECTION	H = PACK OUT	L = PACK IN
6	–	I	GND		
7	CD CLK	I	CD CLOCK INPUT		
8	GND	I	GND		
9	–	I	+ 5V		
10	B-PACK	I	B DECK PACK DETECTION	H = PACK OUT	L = PACK IN
11	B-PLAY	I	B DECK PLAY SW	H = NOT PLAY	L = PLAY
12	R REC	I	REVERSE REC DETECTION	H = REC PROHIBITION	L = REC PERMITTED
13	PS IN	I	PS IN		
14	F REC	I	FORWARD REC DETECTION	H = REC PROHIBITION	L = REC PERMITTED
15	PS LOAD	I	PS LOAD		
16	Vcc	I	+5V		

7. Key matrix

FL driver u-COM (uPD780204-038)

• X14, IC1

VOLTAGE (V)	AD0 (33pin)	AD1 (32pin)	AD2 (31pin)	AD3 (30pin)
0 ~ 0. 82	POWER	EX. BASS	CD PGM	TUNING UP
0. 84 ~ 1. 64	–	–	DUBBING	TUNING DOWN
1. 66 ~ 2. 52	–	DISPLAY	SRS	BAND
2. 54 ~ 3. 38	–	INPUT	SOUND	AUTO
3. 40 ~ 4. 18	–	MODE / DEMO	SET	ENTER
4. 20 ~ 4. 78	–	TIMER	–	–

VOLTAGE (V)	AD4 (29pin)	AD5 (28pin)	AD6 (27pin)
0 ~ 0. 82	CD ⏮	A / B	DOLBY NR
0. 84 ~ 1. 64	CD ⏭	TAPE ▶▶	REV MODE
1. 66 ~ 2. 52	CD ■	TAPE ▶	DISC 1
2. 54 ~ 3. 38	CD ▶/II	TAPE ■	DISC SKIP
3. 40 ~ 4. 18	CD ⏏	TAPE ◀	DISC 2
4. 20 ~ 4. 78	TAPE ●	TAPE ◀◀	DISC 3

ADJUSTMENT

1. Tuner adjustment

X05-490x

NO.	ITEM	INPUT SETTINGS	OUTPUT SETTINGS	TUNER SETTINGS	ALIGNMENT POINTS	ALIGN FOR	FIG.
1	DISCRIMINATOR	(A) 98 MHZ, 70dBf (ANT INPUT) 1 kHz, ±40 kHz DEV	Connect a DC voltmeter between pin 1 and pin2 of CN2.	MONO 98.0 MHz	L31	0V	(a)
	DISTORTION				L32 (EXCEPT K/P)	Minimum distortion.	
2	DISTORTION (STEREO)	(C) 98 MHz, 70dBf (ANT INPUT) 1 kHz, ±40 kHz DEV	(B)	AUTO 98.0 MHz	IFT (A1)	Minimum distortion.	(a)

X05-4890

NO.	ITEM	INPUT SETTINGS	OUTPUT SETTINGS	TUNER SETTINGS	ALIGNMENT POINTS	ALIGN FOR	FIG.
1	TUNED LEVEL	(A) 98 MHz, 31.2dBf (ANT INPUT) 1 kHz, ±40 kHz DEV		MONO 98.0 MHz	VR1	Adjust VR1 and stop at the point where ED1 (TUNED) goes ON.	(a)
2	DISTORTION (STEREO)	(A) 98 MHz, 70dBf (ANT INPUT) 1 kHz, ±40 kHz DEV PILOT: ±6 kHz DEV	(B)	AUTO 98.0 MHz	IFT (A1)	Minimum distortion.	(a)

X05-4710

No.	ITEM	INPUT SETTING	OUTPUT SETTING	TUNER MODE	ALIGNMENT POINTS	ALIGN FOR	FIG.
1	DISCRIMINATOR	(A) 98MHz 1kHz, ±40kHzdev 70dBf (ANT input)	Connect a DC voltmeter to CN2	MONO 98.0MHz	L5	0V	(a)
2	DISTORTION (STEREO)	(C) 98MHz 1kHz, ±40kHzdev Pilot, ±6kHzdev 70dBf (ANT input)	(B)	AUTO 98.0MHz	IFT (A1)	Minimum distortion	(a)
3	SENSITIVITY (SW)	(D) 6.5MHz 400Hz 30%mod 40dBf (ANT input)	(B)	6.5MHz	L2	Maximum output	(a)

X04-1313 Q TYPE (65MHz~74MHz BAND)

N0.	ITEM	INPUT SETTINGS	OUTPUT SETTINGS	TUNER SETTINGS	ALIGNMENT POINTS	ALIGN FOR	FIG.
1	VCO	(E) 69 MHz, 70 dBf (ANT INPUT) 1 kHz, 0 kHz DEV SUB, 0 kHz DEV	Connect a frequency counter to VCO monitor (CN2).	AUTO 69 MHz	VR 2	Adjust it the frequency counter reads 31.25 kHz ±100 Hz.	(a)
2	RESONANCE POINT	(E) 69 MHz, 70 dBf (ANT INPUT) 1 kHz, 40 kHz DEV SUB, 10 kHz DEV Select : L or R	Connect a oscilloscope to TUNER OUT(CN6).	AUTO 69 MHz	TC 1	Minimum crosstalk.	(a)
3	SEPARATION	(E) SAME AS ABOVE	Connect a oscilloscope to TUNER OUT(CN6).	AUTO 69 MHz	VR 1	Minimum crosstalk.	(a)

ADJUSTMENT

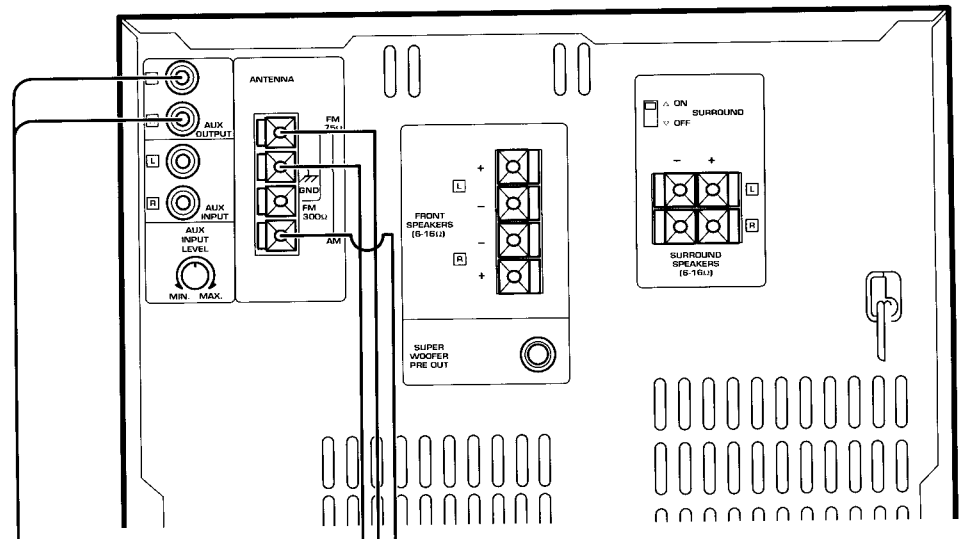

Fig (a)

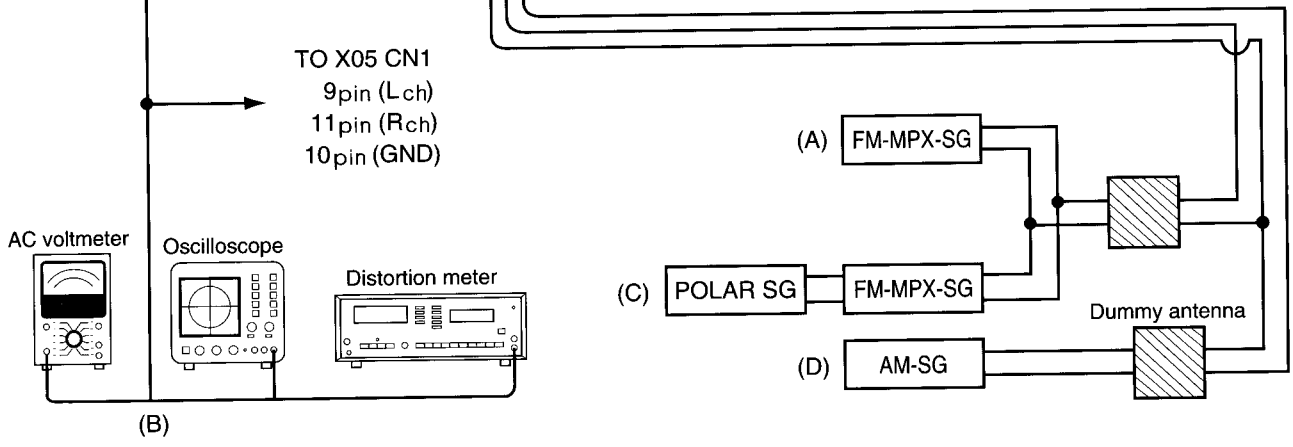

2. Test mode of CD player

2-1 Main unit

(1) Setting of the test mode
While pressing the [PLAY/PAUSE] key, plug the AC power cord into AC outlet.

(2) Canceling of the test mode
Press the [STOP] key on stop mode or unplug the AC power code from AC wall outlet.

(3) Operation

KEY	DISPLAY	OPERATION
PLAY/PAUSE + AC IN	CD 00	• SETTING OF THE TEST MODE • CANCEL THE CLAMP • TRAY1/3 ROTATION • TRAY OPENS AUTOMATICALLY
STOP ■	CD 00	• TRAY CLOSE • CANCEL THE CLAMP
PLAY/PAUSE ►/II	CD 03 CD 05	• TRAY CLOSE/DISC CLAMP • T-SERVO OFF(03) OR ON(05)
DISC SKIP		• TRAY 1/3ROTATION
DISC 1	07 EF/FB 08 TG•FG 09 TE/RF 10 TE/VC	• MECHANISM STOPS WHEN THE AUTOMATIC ADJUSTMENT IS FINISHED. • DISPLAY CHANGES CYCLICALLY • IF NG, DISPLAY BLINKS UP

ADJUSTMENT

3. Adjustment of CD player

No.	ITEM	INPUT SETTING	OUTPUT SETTING	PLAYER SETTING	ALIGNMENT POINT	ALIGN FOR	FIG.
Step 1,2 are in TEST MODE **TEST MODE : While pressing the [PALY/PAUSE] key, plug the AC power cord into the AC outlet.**							
1	LASER POWER	–	Set the senor section of the optical power meter on the pickup lens.	Press the"PLAY"key to check that the display is "03".	–	On the power from.0.05 to 0.15mw. when the diffraction grating is correctly aligned with the RF level of 0.8Vp-p or more	(a)
2	FOCUS ERROR BALANCE	Test disc Type 4	Connect an oscilloscope as follows. CH1 : RF(CN7 pin1) CH2 : FE(CN7 pin6) GND : VC(CN7 pin4)	Press the "PLAY" key. Confirm that the display is"05"	FE BALANCE VR1	Optimum eye pattern	(d)

Note:
Type 4disc :SONY YEDS-18 Test Disc or equivalent. (KTD-02)
LPF : Around 47kΩ + 390pF or so.

(a) Laser Power

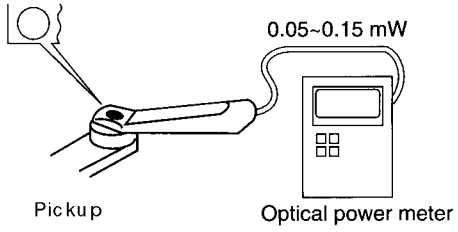

(d)

RF signal : AC coupled

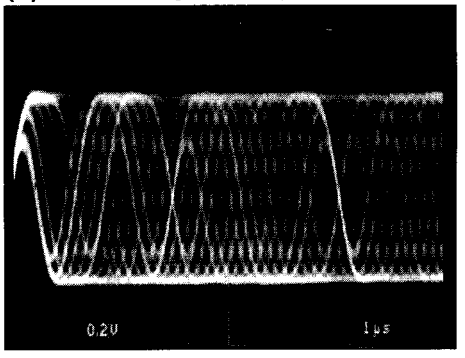

- RF signal in test mode (PLAY).
- Perform the tangential and focusing offset are focused into one point on the display. The crossing points above and below the center shall also be looked clearly.

4. Test mode of DECK section

(1) Setting
While pressing the PLAY key(DECK), plug the AC power cord into an AC power outlet.

(2) Resetting
- Disconnect the AC power cord from an AC power outlet or press the [ON/STANDBY] key.

(3) Operation in TEST mode

(a) Initial condition

Item	Condition
Power	ON
Selector	TAPE
Main VOL.	-45dB(VOL45)
EX. bass	OFF
FL, LED, LCD	All the FLs are turned on for 10 seconds

(b) 4-sec REC
If the REC key is pushed, the system record for 4sec. Then, it rewinds to the REC starting position and plays back automatically.
If the REC key is pushed during the 4-sec REC operation, the system records further for 4-sec, then returns to the starting position of the first 4-sec REC operation and plays back.

(c) Mechanism SW detection

SW	Display
B FWD REC Inhibit SW	CD Calendar (1)
B RVS REC Inhibit SW	CD Calendar (2)
A Pack SW	CD Calendar (3)
B Pack SW	CD Calendar (4)

(d) Indication of A/B deck

A/B key	Display
A deck	ECHO
B deck	SLEEP

ADJUSTMENT

5. Cassette Deck adjustment

No	ITEM	INPUT SETTING	OUTPUT SETTING	DECK SETTING	ALIGNMENT POINT	ALIGN FOR	FIG.
Unless otherwise specified, set the respective switches as follows: TAPE : NORMAL DOLBY : OFF PLAY OUT : Lch (X28,CN6 ①pin), Rch (X28,CN6 ④pin) 0dBs=0.775V							
Ⅰ. Cassette mechanism unit (Adjustment of the REC / PLAY head)							
〈1〉	Demagnetization and cleaning	—	—	Power : OFF Demagnetization,cleaning, PLAY	Recording head, erase head,capstan pinch roller	Demagnetize the REC / PLAY head with the head eraser.Clean the REC / PLAY head, erase head,capstan and pinch roller using a cotton swab slightly damped with alcohol.	
〈2〉	Azimuth of the REC/PLAY head	TCC–153 MTT–114 10kHz, – 10dB	(B)	PLAY	 FWD RVS	Adjust the output to maximum and adjust the azimuth adjustment screw for the Lissajours waveform pattern of the oscilloscope to become close to a 45° straight line.	
Ⅱ. PC BOARD ADJUSTMENT							
〈1〉	TAPE SPEED(NORMAL)	TCC–110 MTT–111 SCC–1727 3kHz	(B)	PLAY	A DECK VR 5 B DECK VR 6	Adjust the tape speed so that 3kHz is obtained at the center of the tape.	
Ⅲ. PC BOARD ADJUSTMENT							
〈1〉	PLAYBACK LEVEL	MTT– 150 400Hz	(B)	PLAY	A DECK VR 7 (L) VR 8 (R) B DECK VR 1 (L) VR 2 (R)	Adjust the playback output to -2.5dBs	
〈2〉	BIAS CURRENT	(A) Adjust the AG for the output of the DECK to become 400Hz (-20dB)/12.5kHz (-20dB)	(B)	REC ↕ PLAY	VR 3 (L) VR 4 (R)	Record 400Hz and 12.5kHz alternately, and adjust the bias current adjustment potentiometer for the playback levels to become the same.	

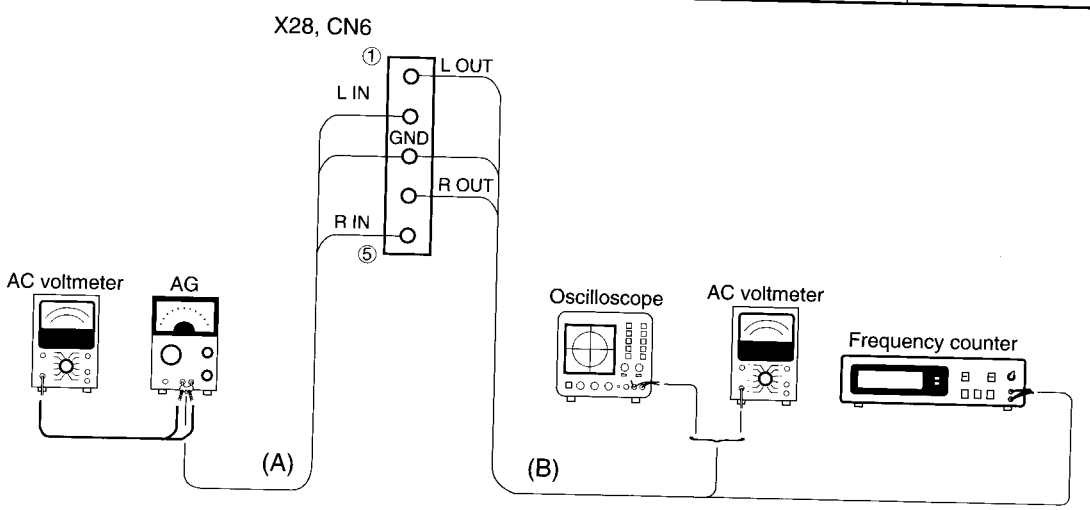

WIRING DIAGRA

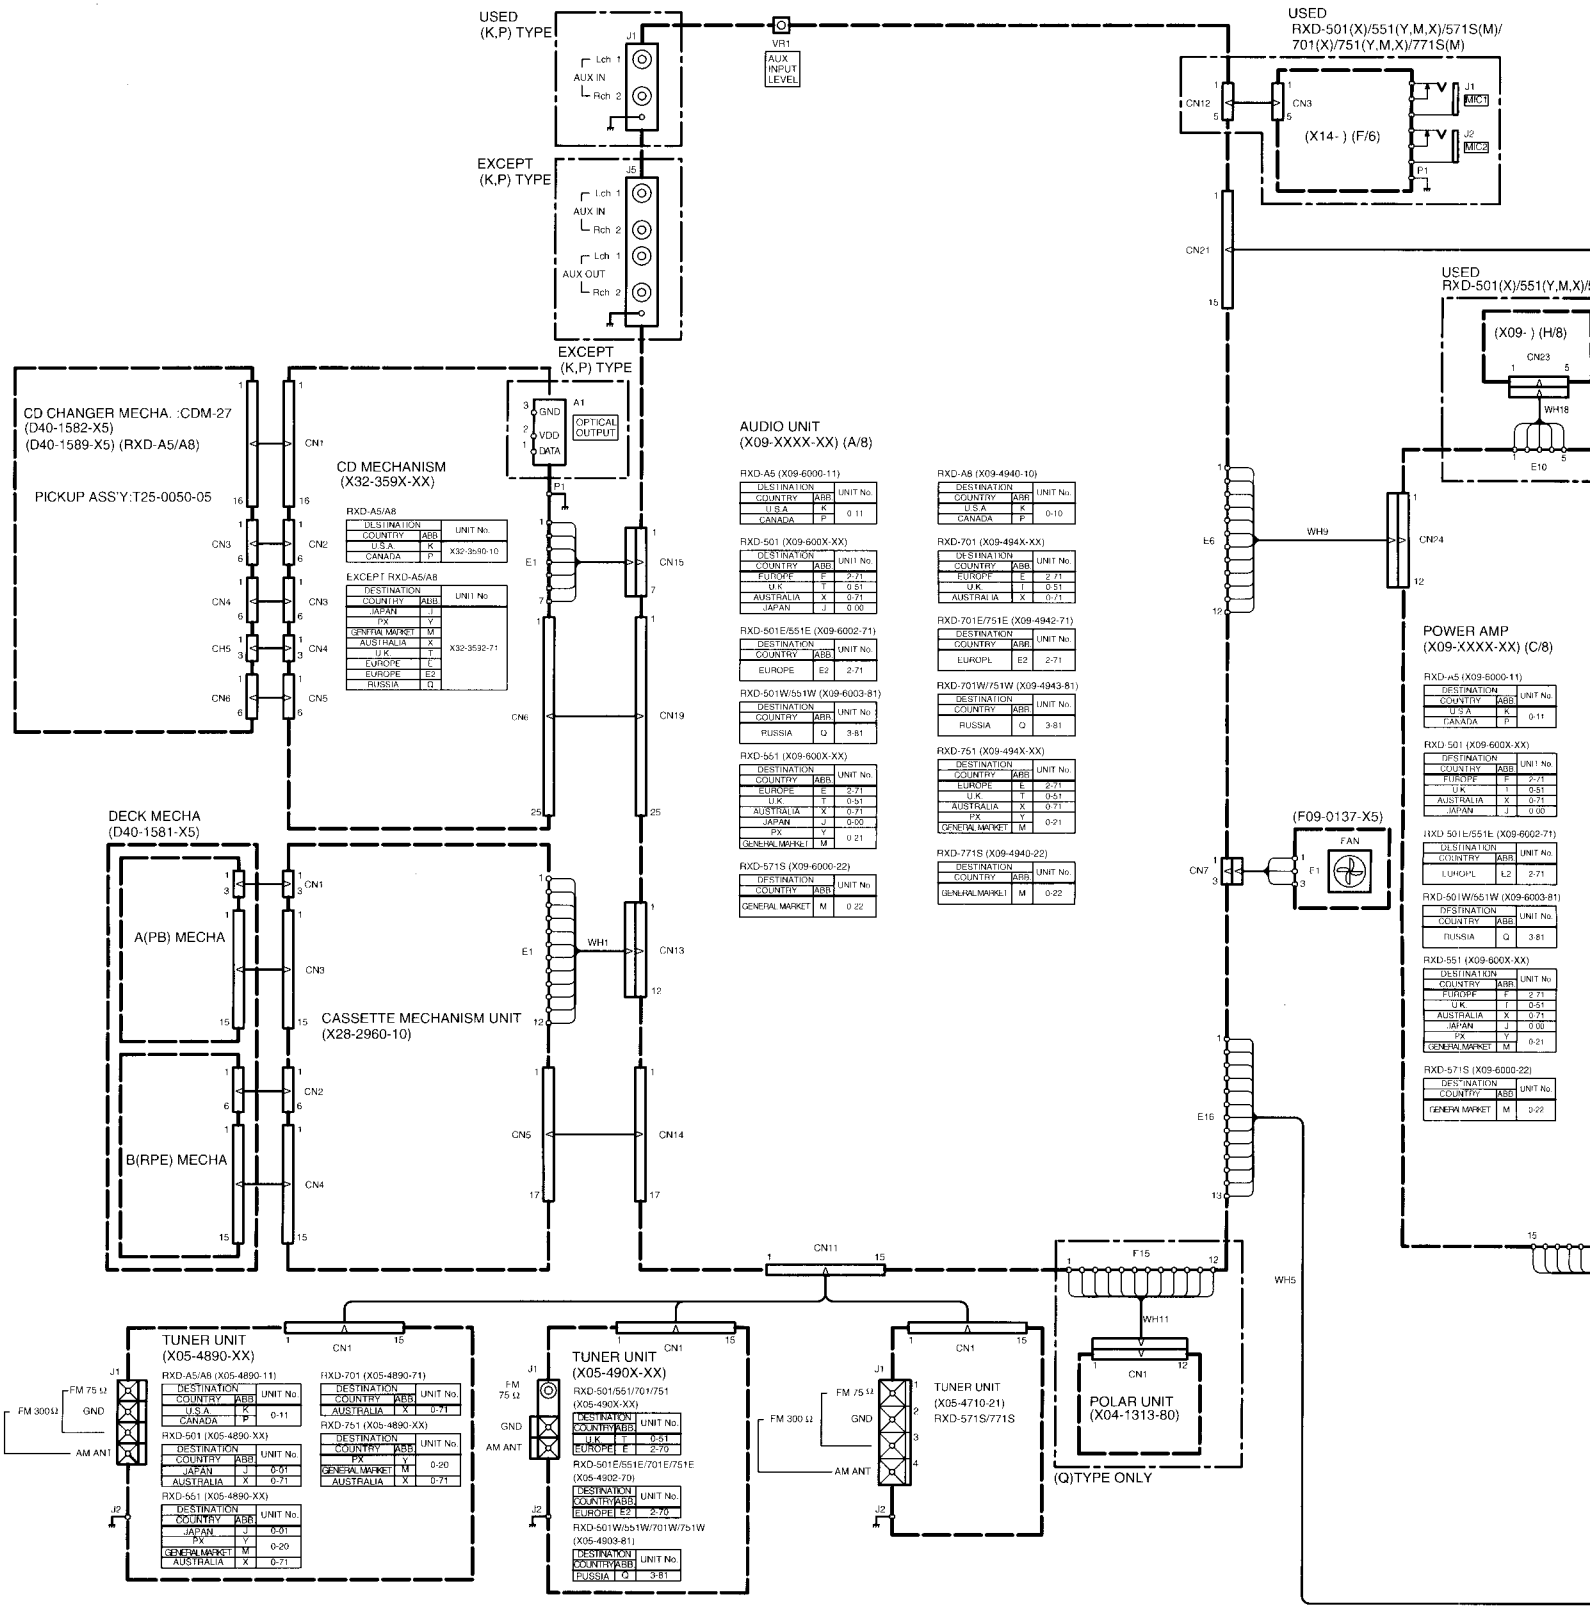

17

WIRING DIAGRAM

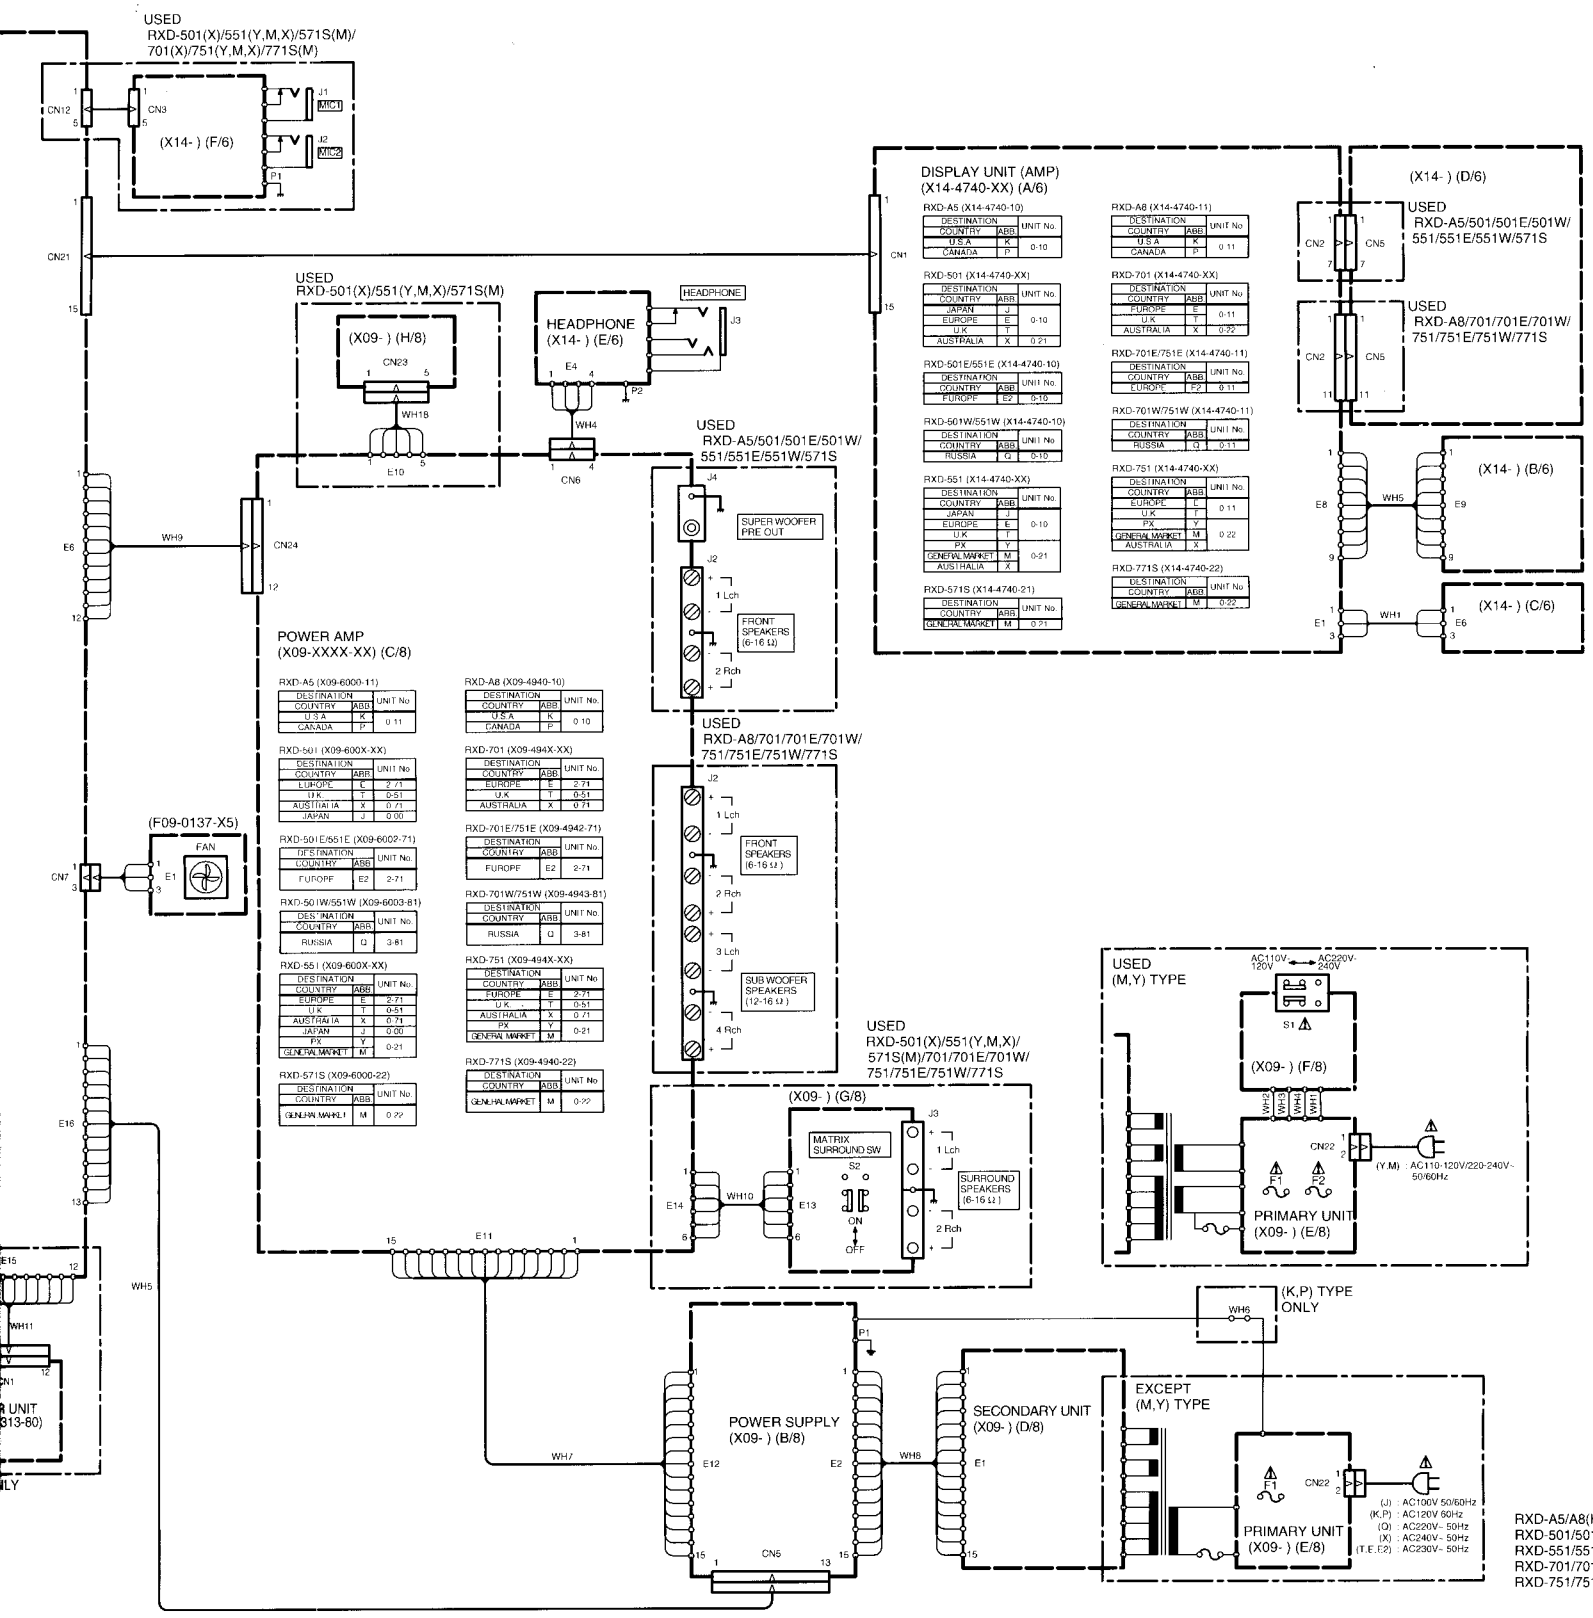

PC BOARD(Component side view)

CD MECHANISM UNIT X32-359X-XX

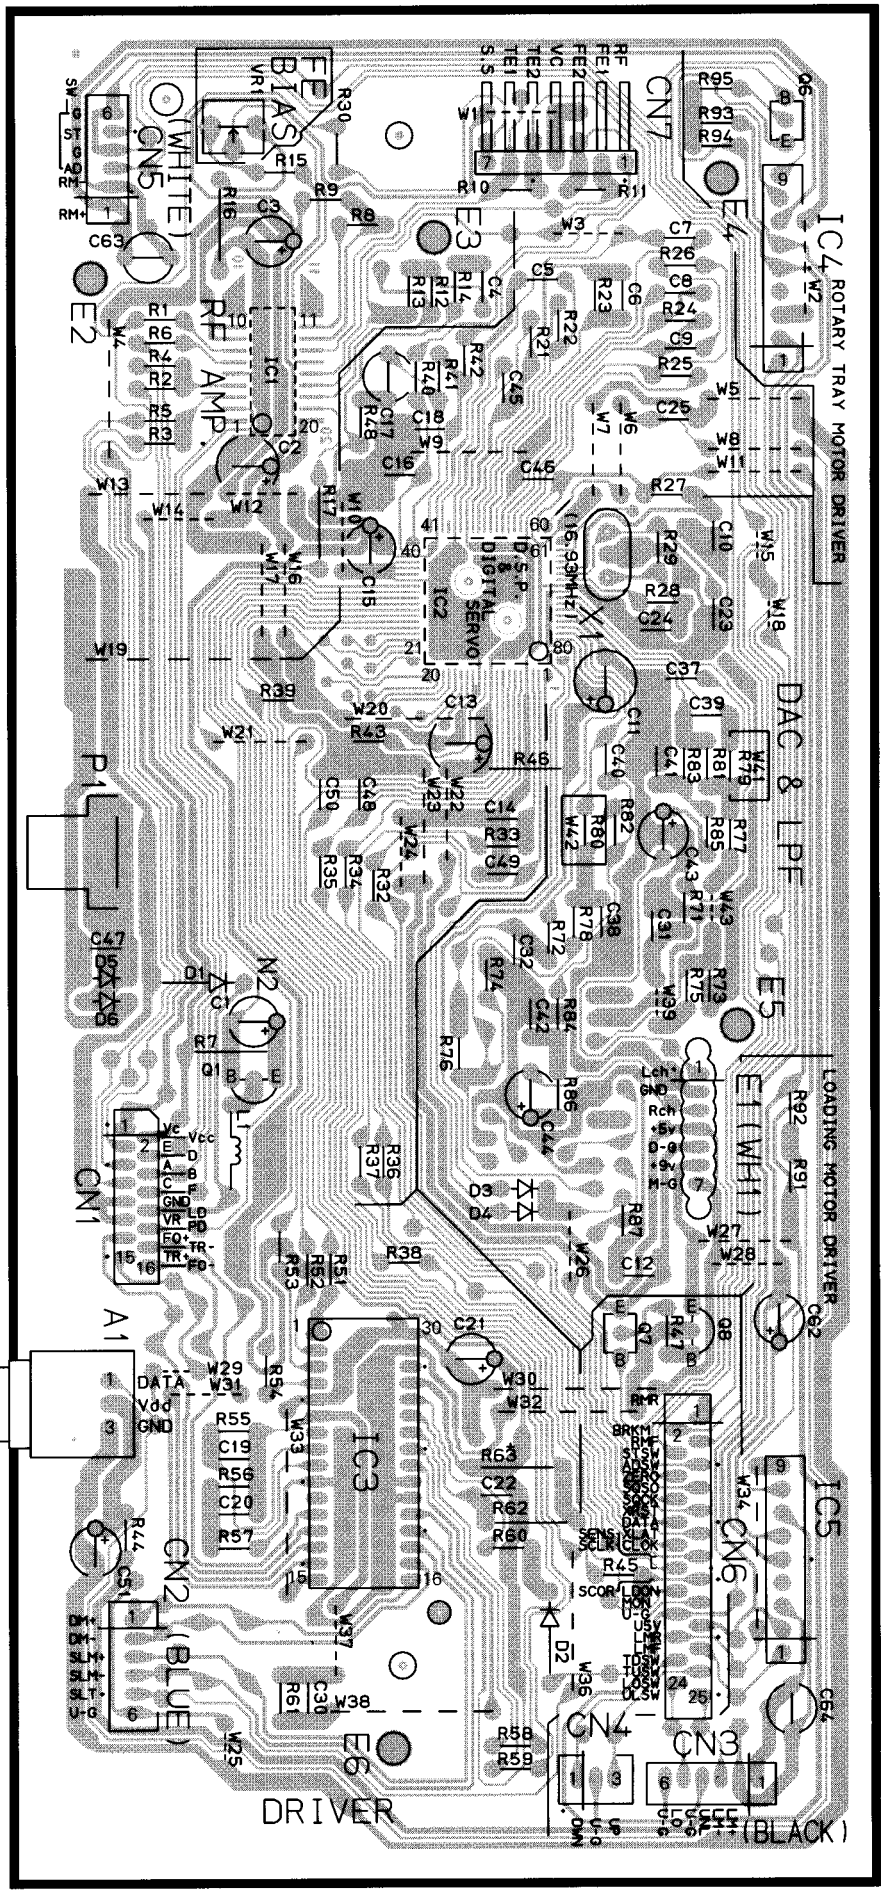

CASSETTE MECHANISM UNIT

X28-2960-10

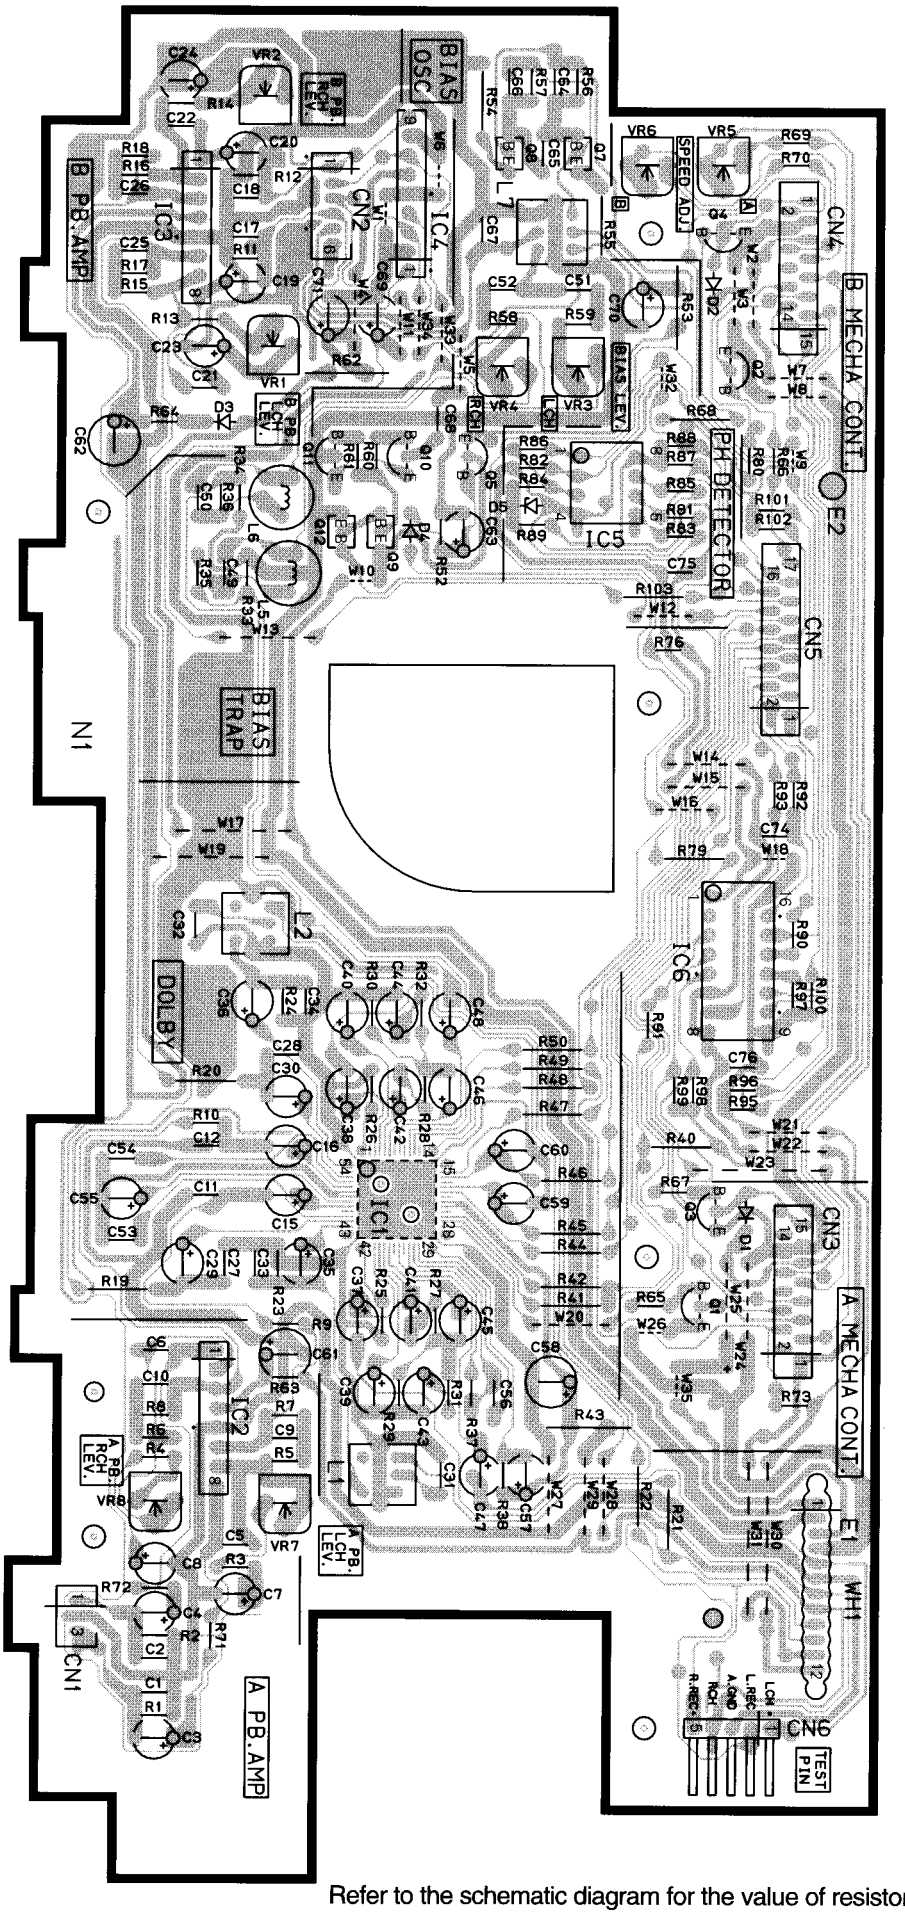

Refer to the schematic diagram for the value of resistors and capacitors.

PC BOARD(Component side view)

MPX UNIT

X04-1313-8X

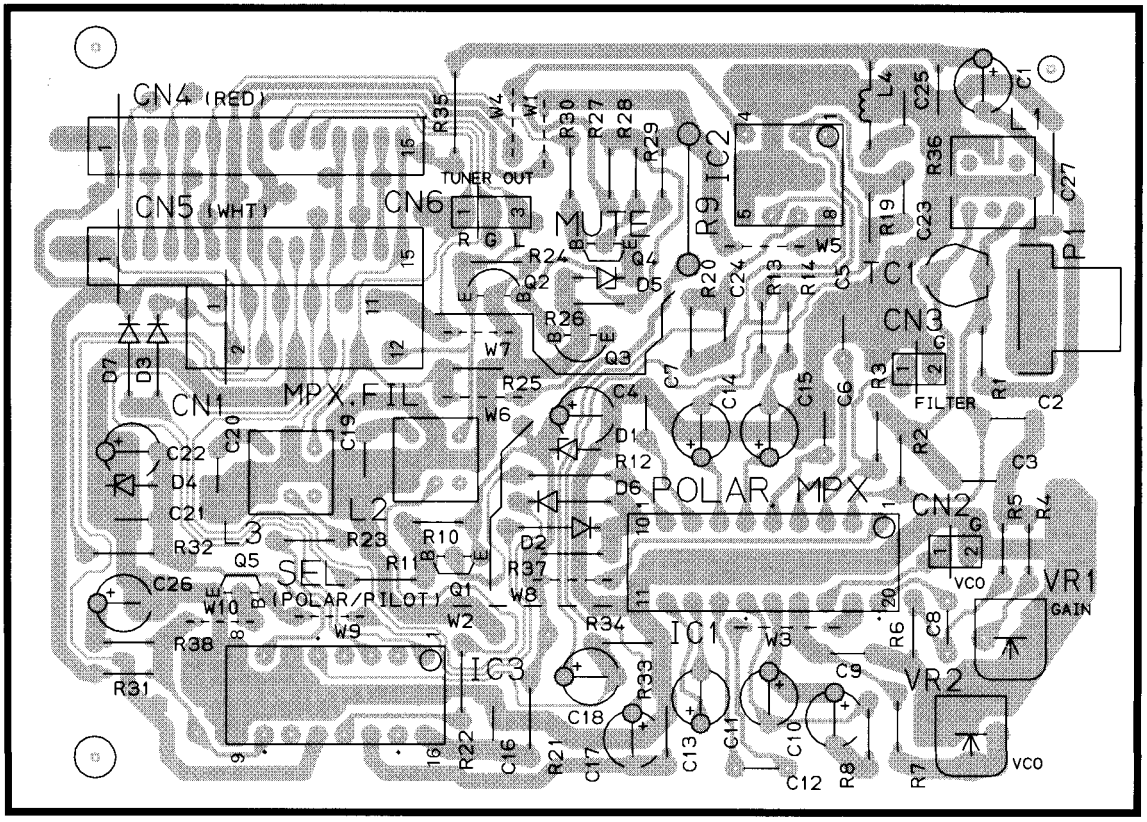

TUNER UNIT (X05-4710-21)

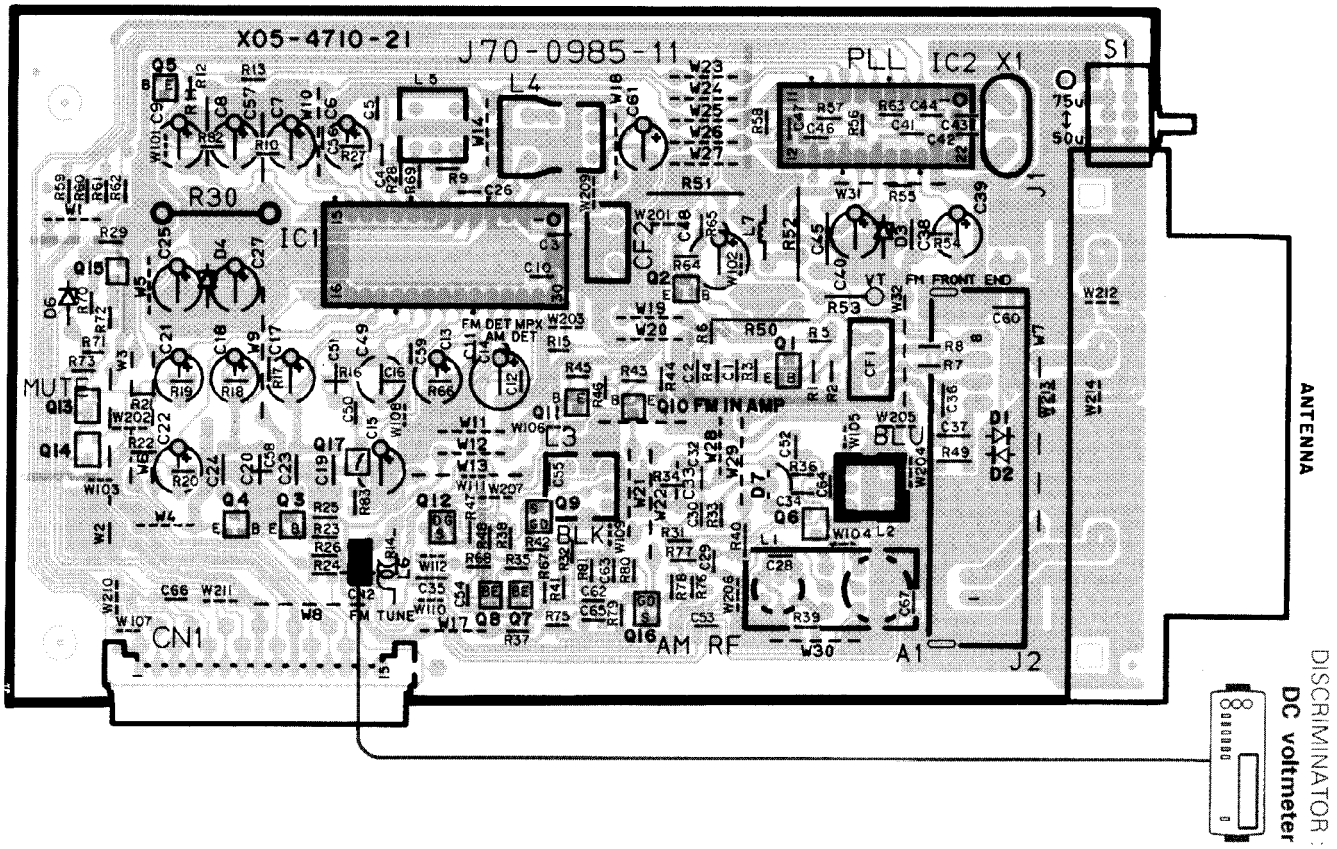

Refer to the schematic diagram for the value of resistors and capacitors.

TUNER UNIT

X05-4890-XX

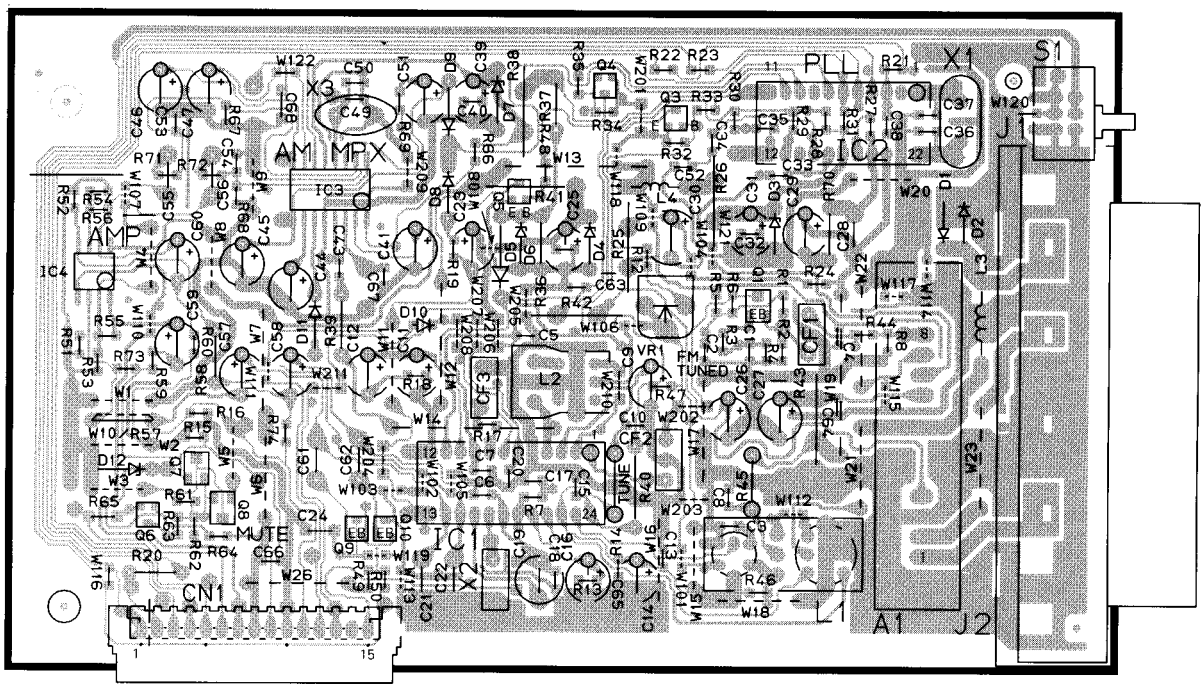

TUNER UNIT

X05-490X-XX

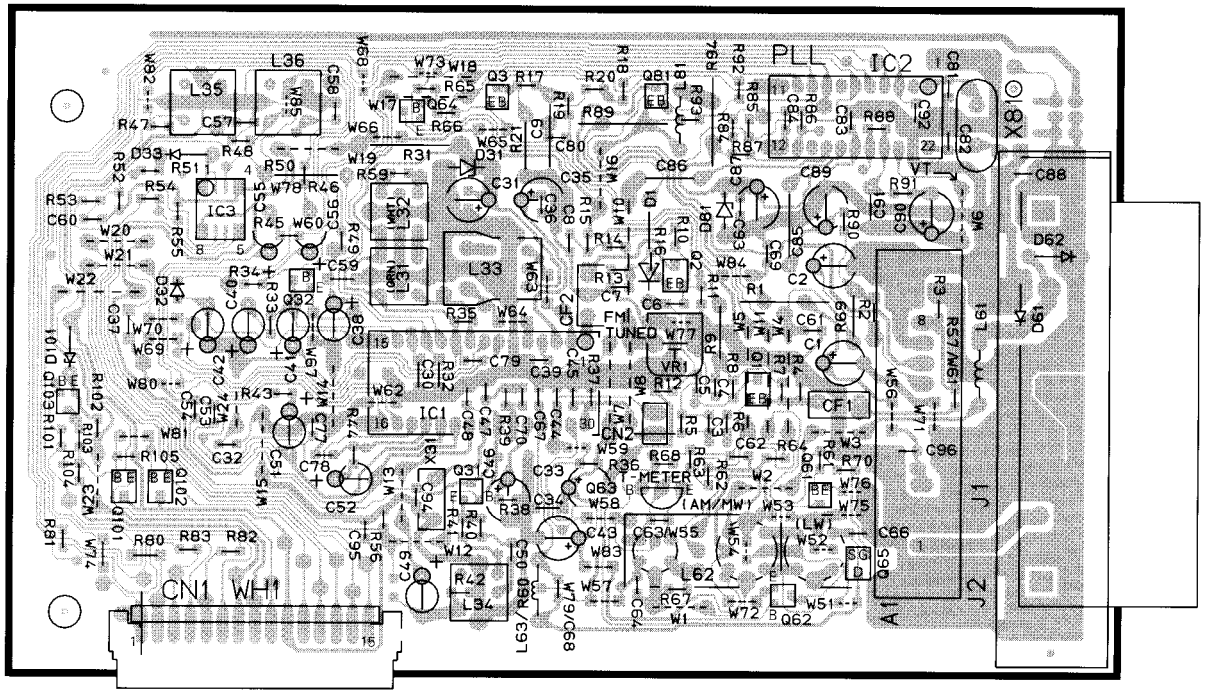

PC BOARD(Component side view)

X09 F/8

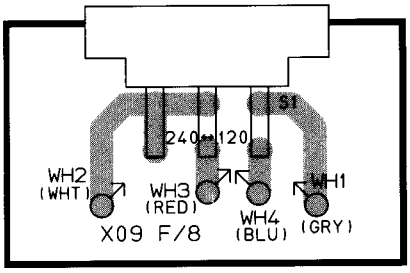

X09 E/8

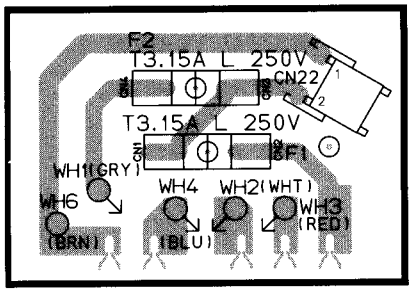

X09 C/8

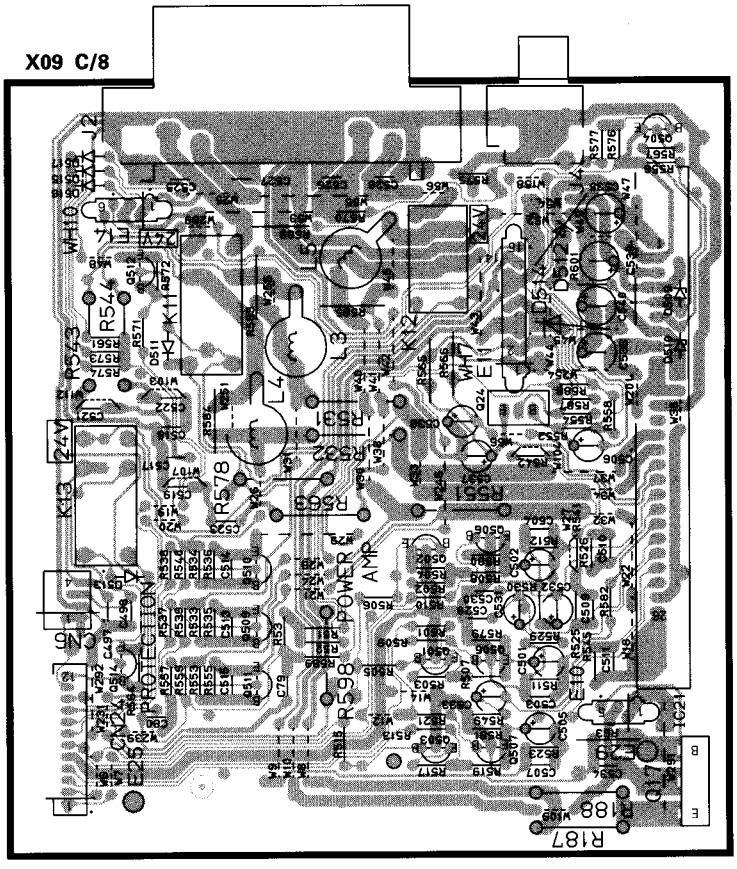

X09 G/8



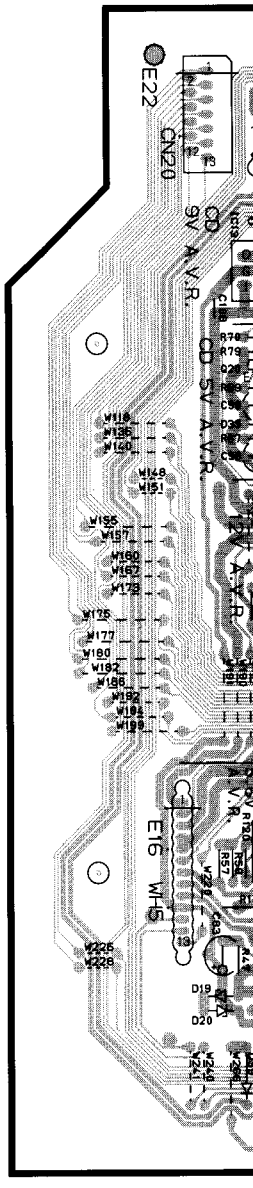

X09 D/8

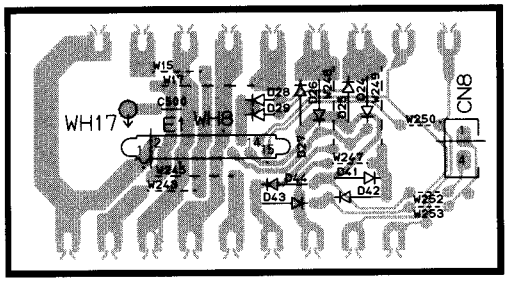

X09 B/8

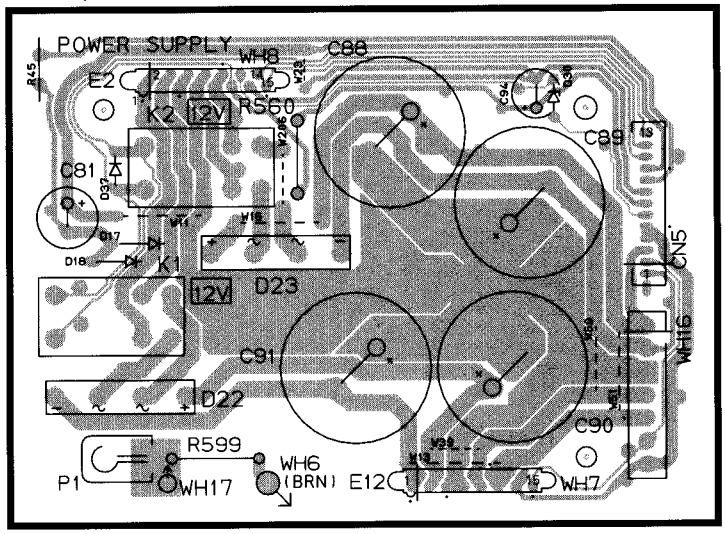

X09 H/8



AUDIO UNIT

X09-494/600X-XX A/8

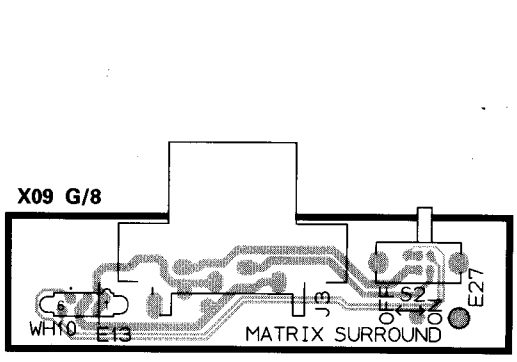

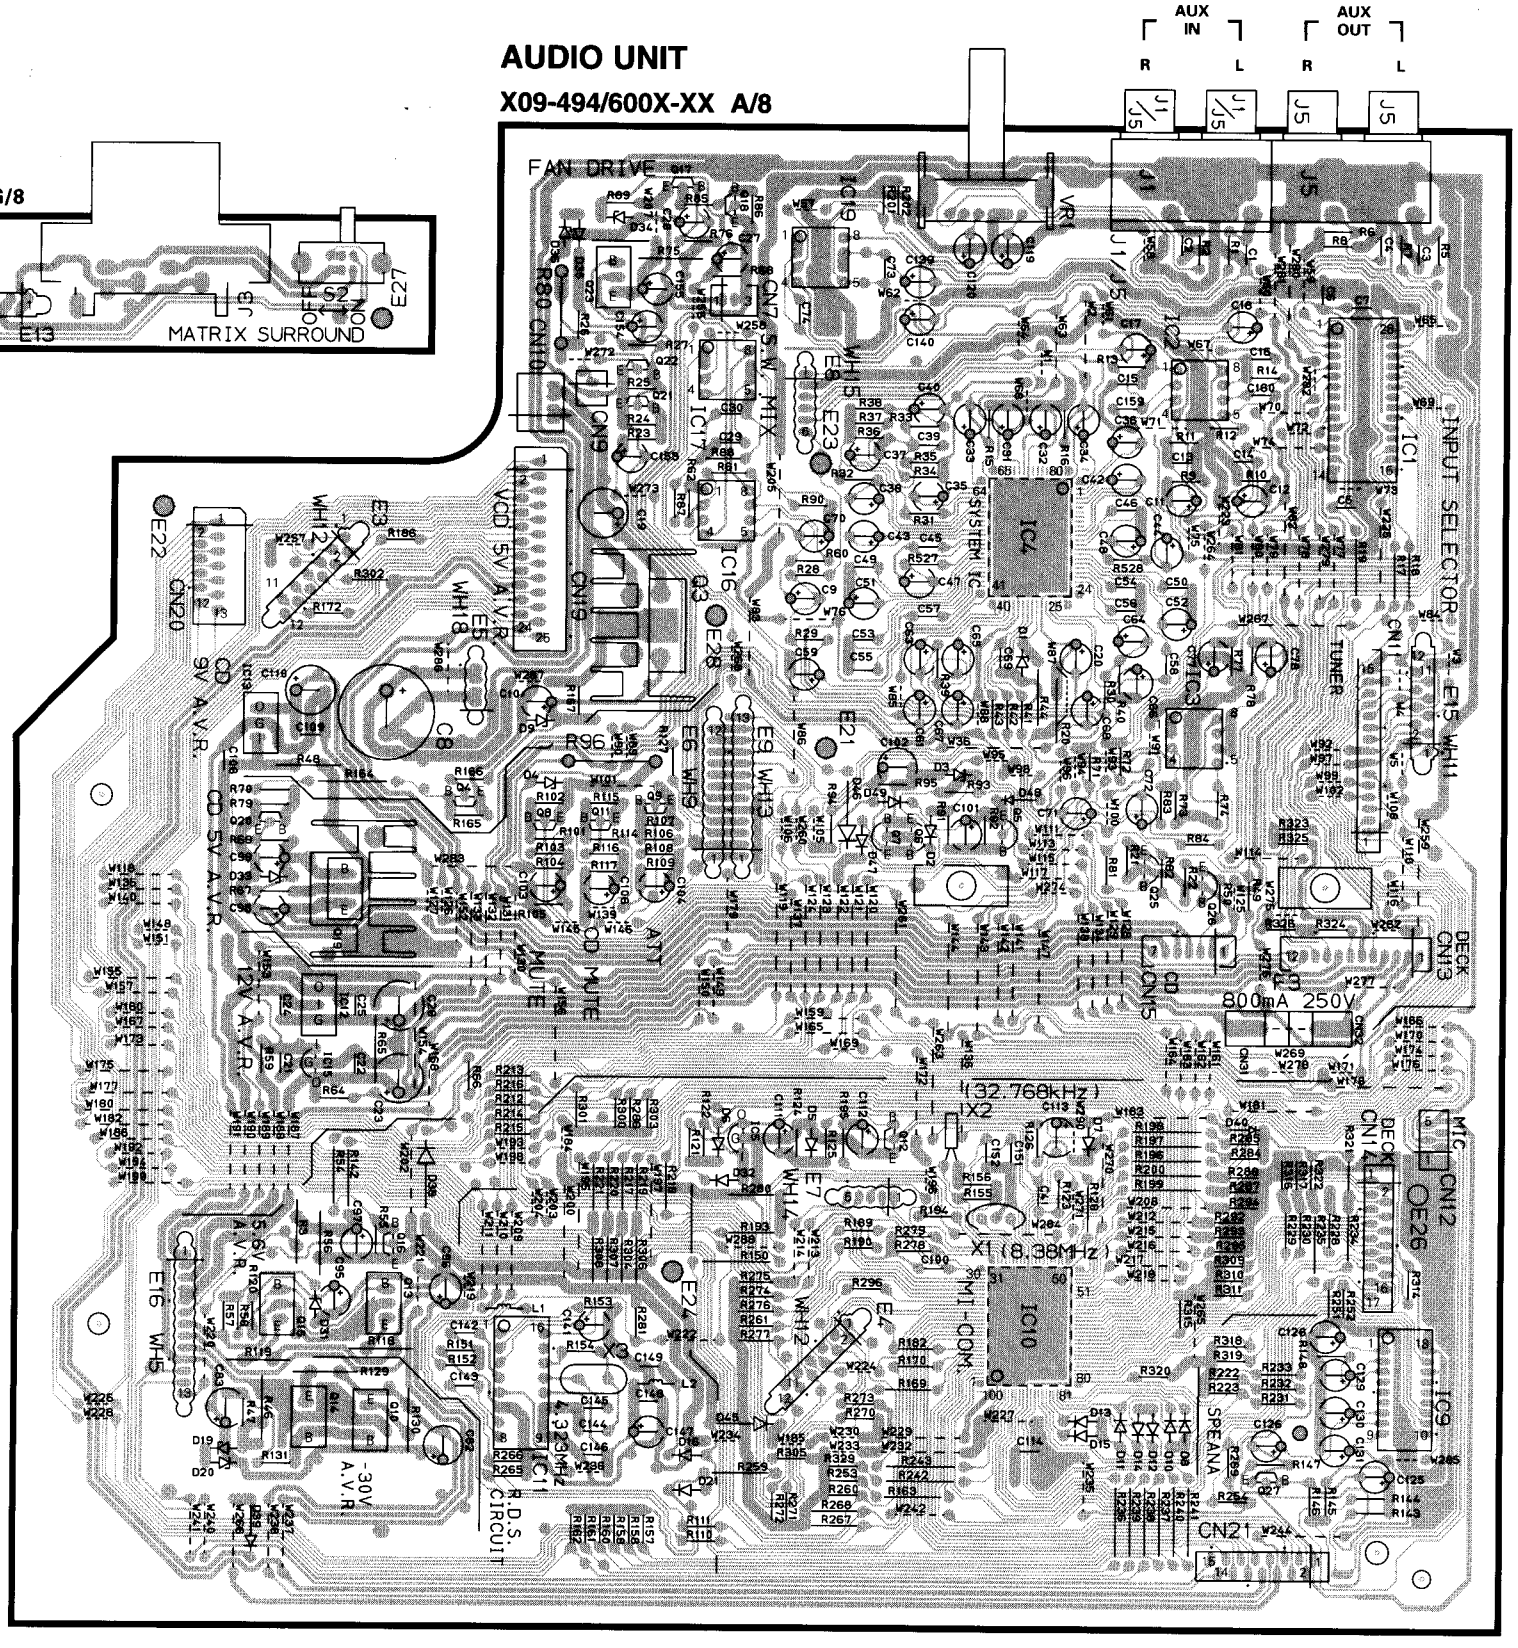

Refer to the schematic diagram for the value of resistors and capacitors.

PC BOARD(Component side view)

DISPLAY UNIT

X14-474X-XX A/6

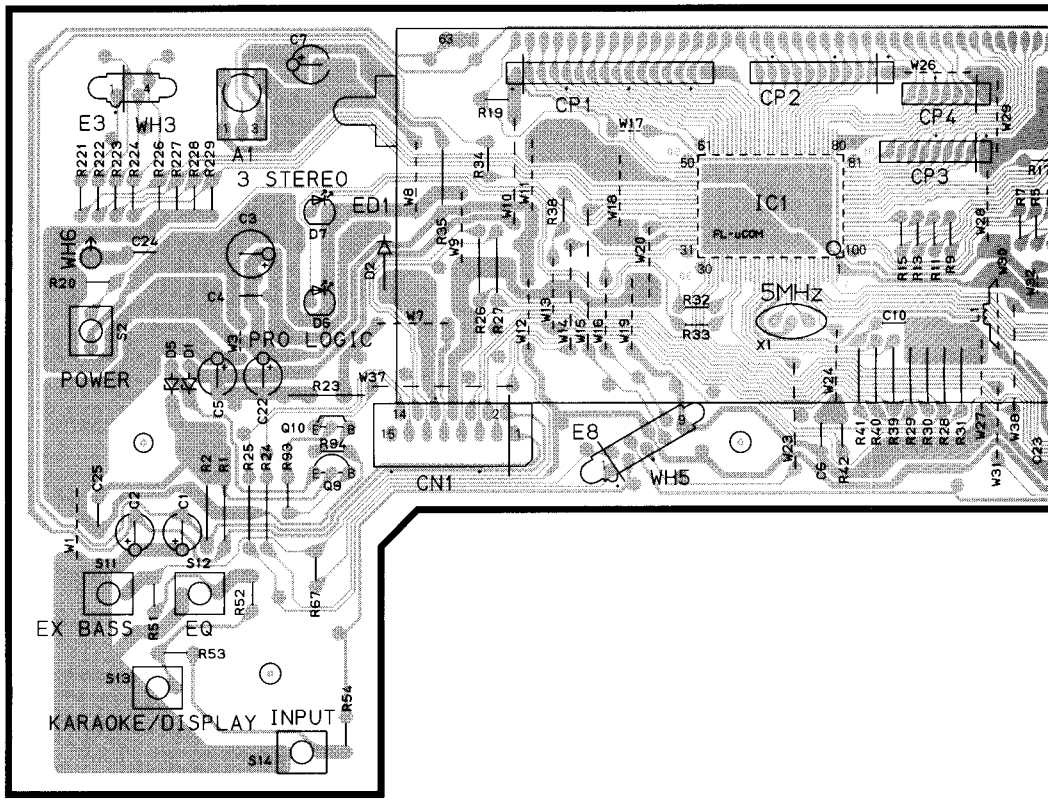

X14 F/6

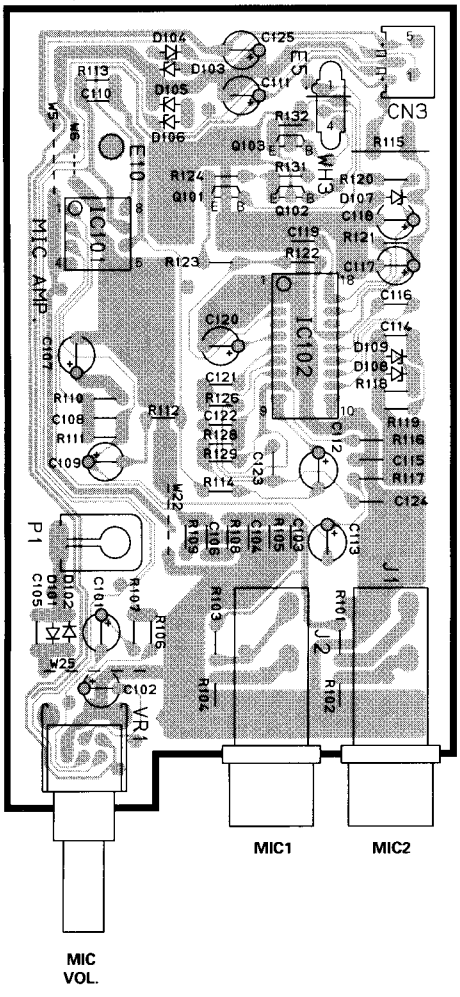

X14 B/6

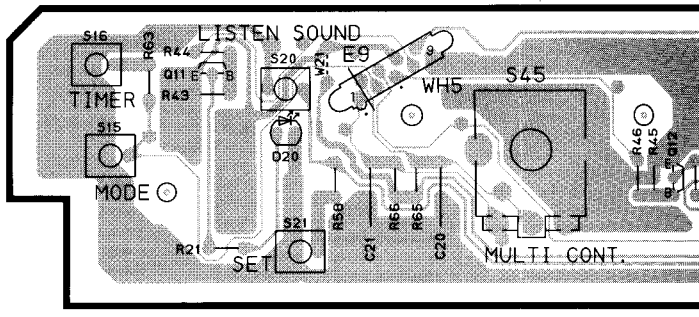

X14 D/6

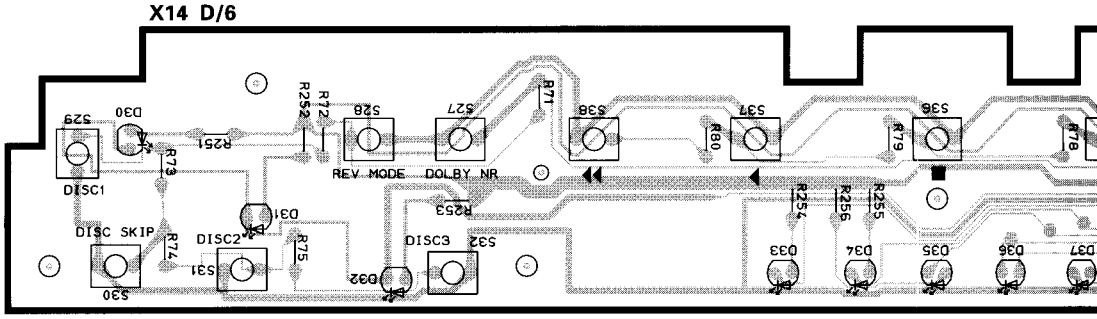

Refer to the schematic diagram for the value of resistors and capacitors.

X14 C/6



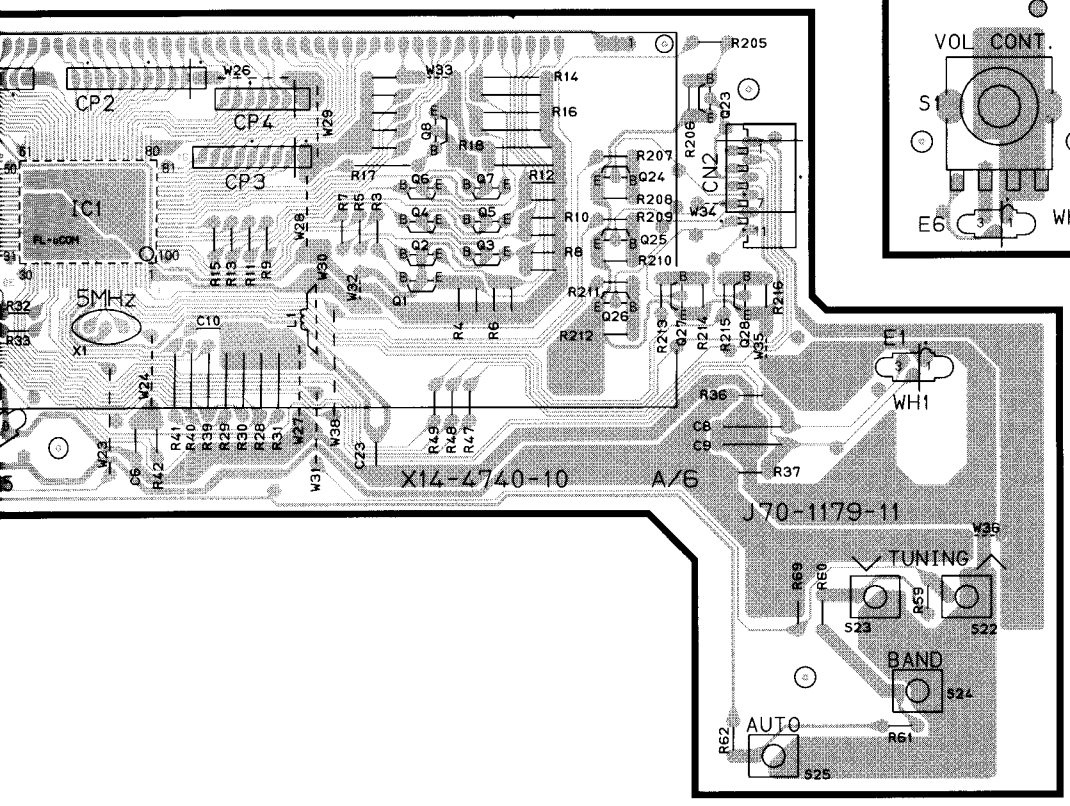

X14 E/6

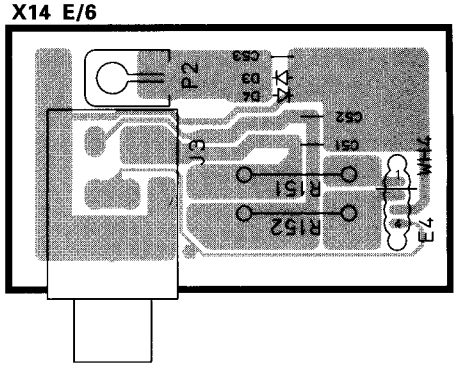

PHONES

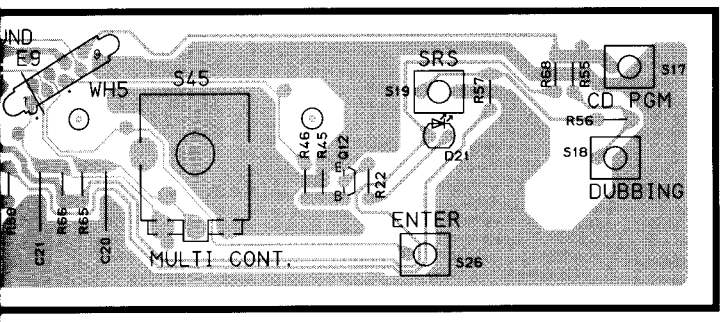

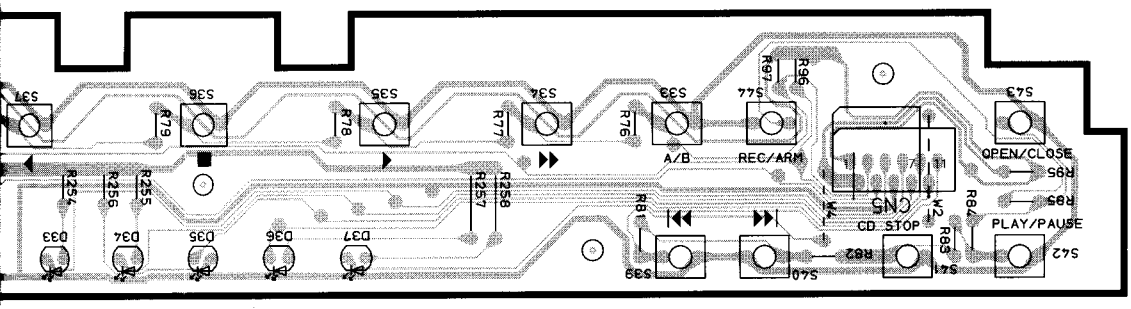

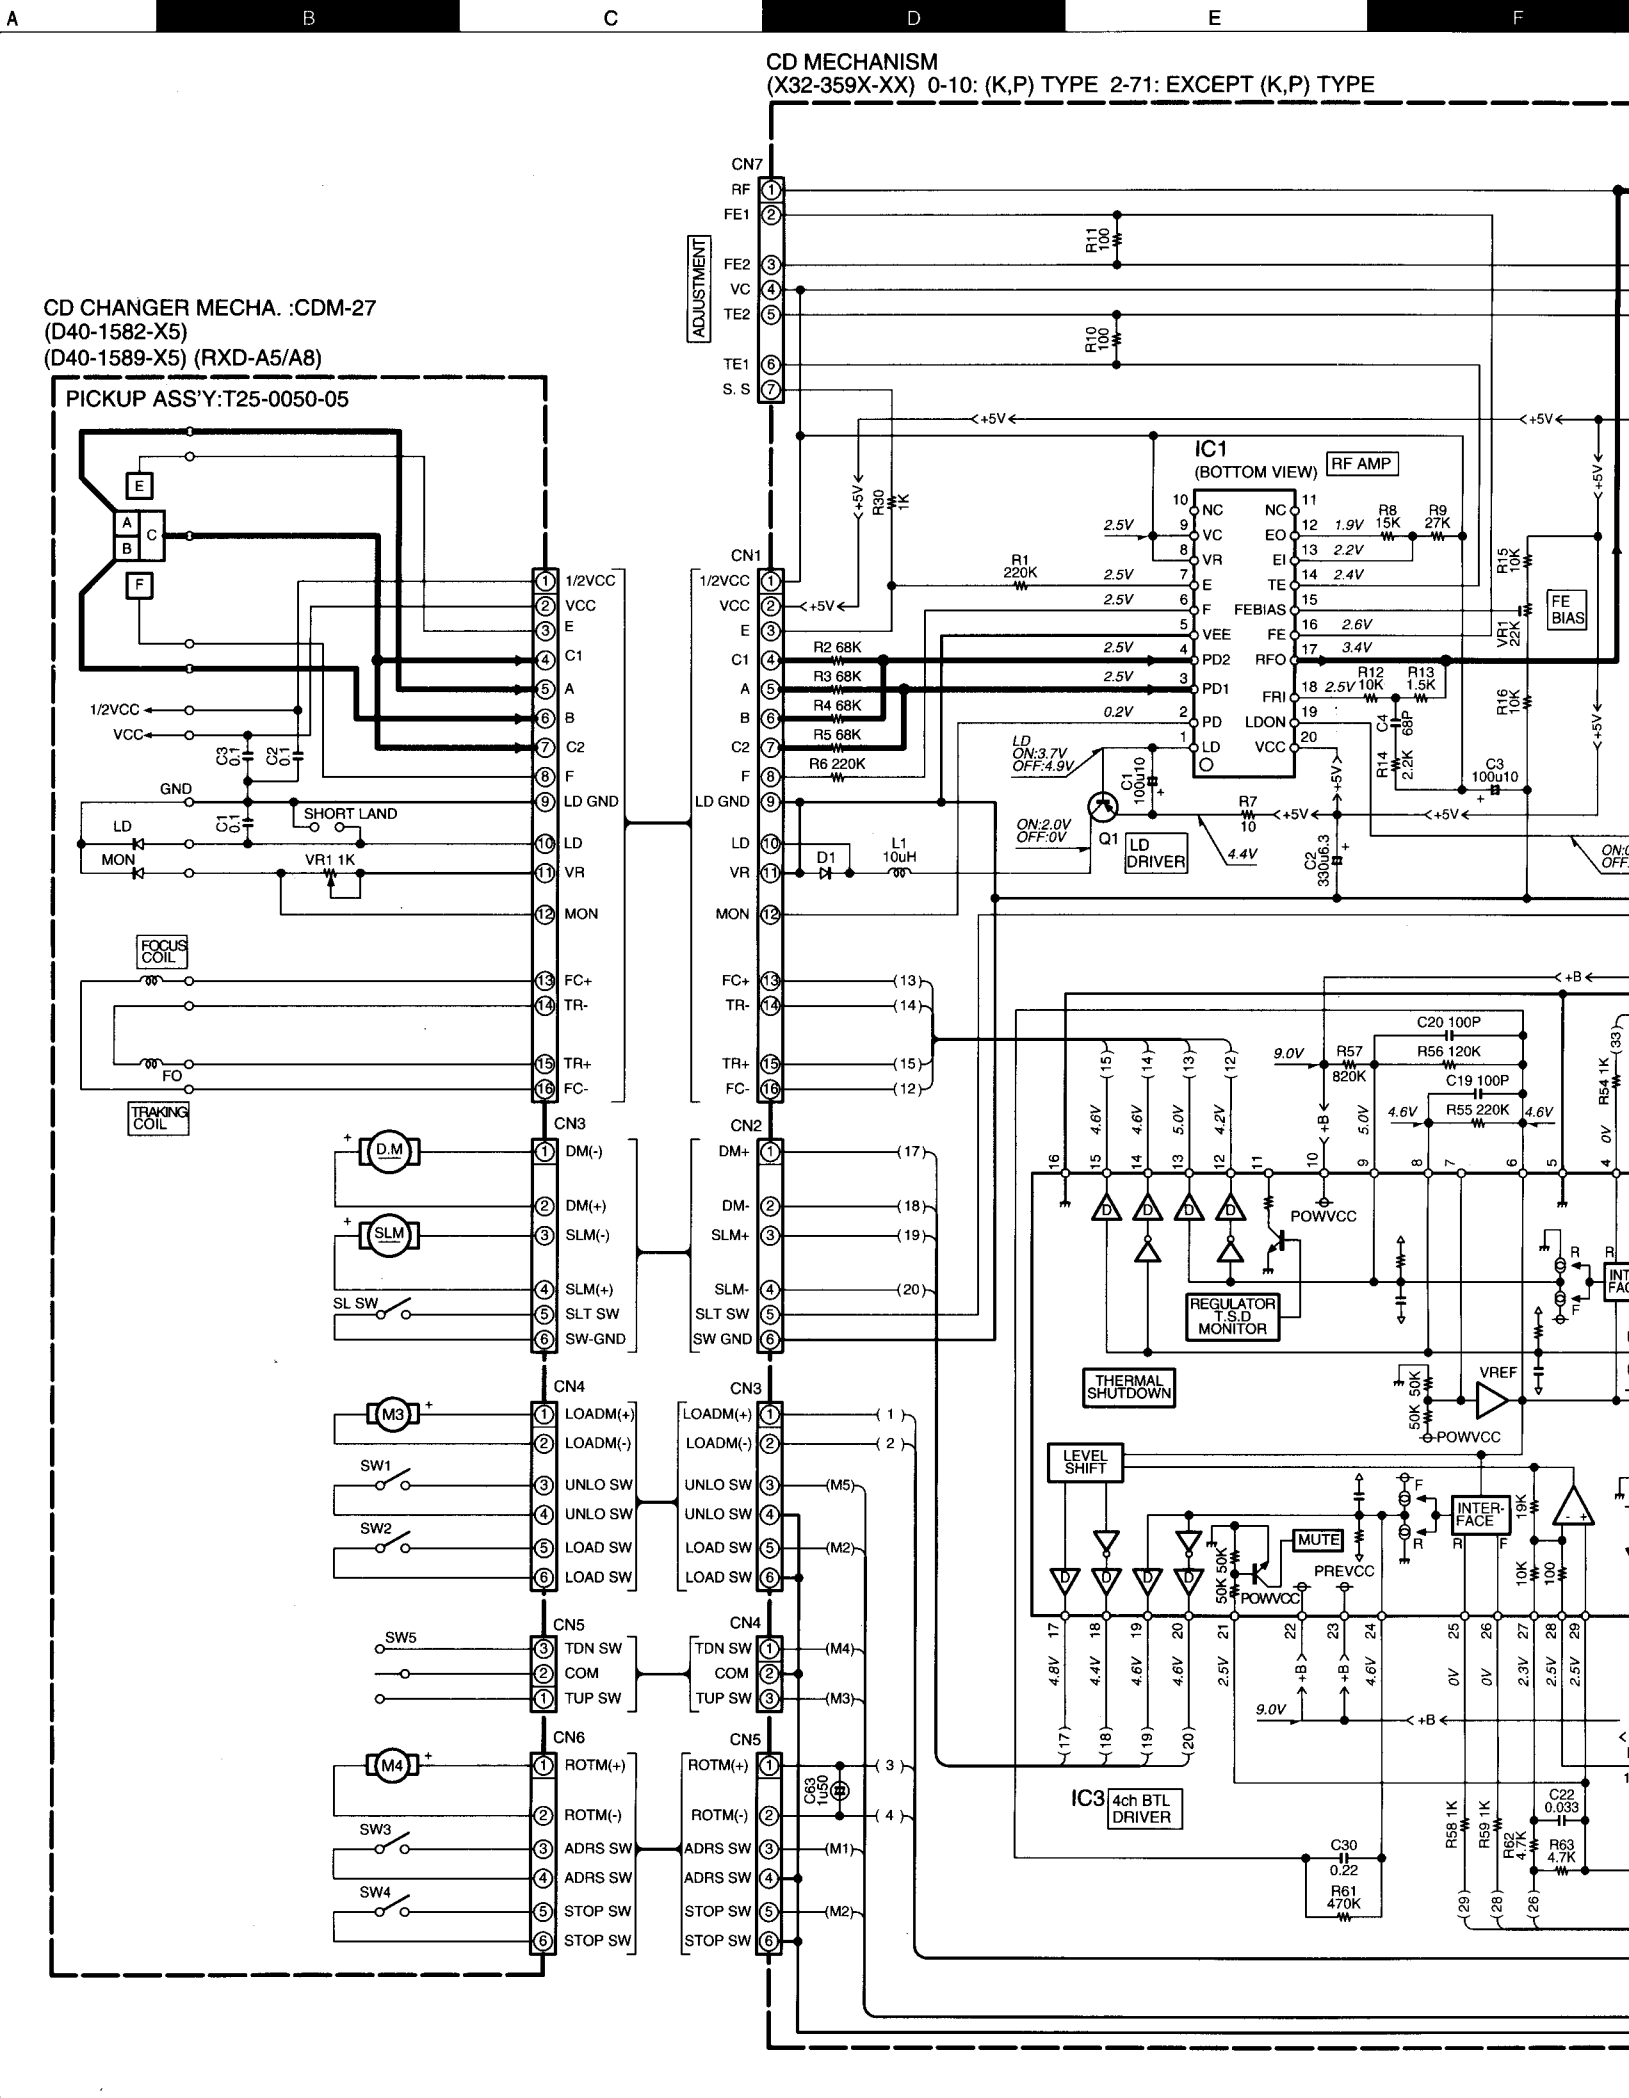
CD MECHANISM
(X32-359X-XX) 0-10: (K,P) TYPE 2-71: EXCEPT (K,P) TYPE
CD CHANGER MECHA. :CDM-27
(D40-1582-X5)
(D40-1589-X5) (RXD-A5/A8)
PICKUP ASS'Y:T25-0050-05
CN7
RF
FE1
FE2
VC
TE2
TE1
S. S
ADJUSTMENT
R11 100
R10 100
IC1
(BOTTOM VIEW)
RF AMP
NC
VC
VR
E
F
VEE
PD2
PD1
PD
LD
EO
EI
TE
FEBIAS
FE
RFO
FRI
LDON
R1 220K
R2 68K
R3 68K
R4 68K
R5 68K
R6 220K
R8 15K
R9 27K
R12 10K
R13 1.5K
R14 2.2K
R15 10K
R16 10K
VR1 22K
FE BIAS
C1 100u10
C2 330u6.3
C3 100u10
C4 68P
R7 10
Q1
LD DRIVER
D1
L1 10uH
LD ON:3.7V OFF:4.9V
ON:2.0V OFF:0V
CN1
1/2VCC
VCC
E
C1
A
B
C2
F
LD GND
LD
VR
MON
FC+
TR-
TR+
FC-
CN2
DM+
DM-
SLM+
SLT SW
SW GND
CN3
DM(-)
DM(+)
SLM(-)
SLM(+)
SLT SW
SW-GND
CN4
LOADM(+)
LOADM(-)
UNLO SW
LOAD SW
CN5
TDN SW
COM
TUP SW
CN6
ROTM(+)
ROTM(-)
ADRS SW
STOP SW
C63 1u50
SHORT LAND
VR1 1K
FOCUS COIL
TRAKING COIL
D.M
SLM
M3
M4
SW1
SW2
SW3
SW4
SW5
SL SW
C20 100P
R57 820K
R56 120K
C19 100P
R55 220K
R54 1K
POWVCC
REGULATOR T.S.D MONITOR
THERMAL SHUTDOWN
VREF
LEVEL SHIFT
MUTE
PREVCC
INTER-FACE
IC3 4ch BTL DRIVER
C30 0.22
R61 470K
C22 0.033
R58 1K
R59 1K
R62 4.7K
R63 4.7K

E F G H I J

71: EXCEPT (K,P) TYPE

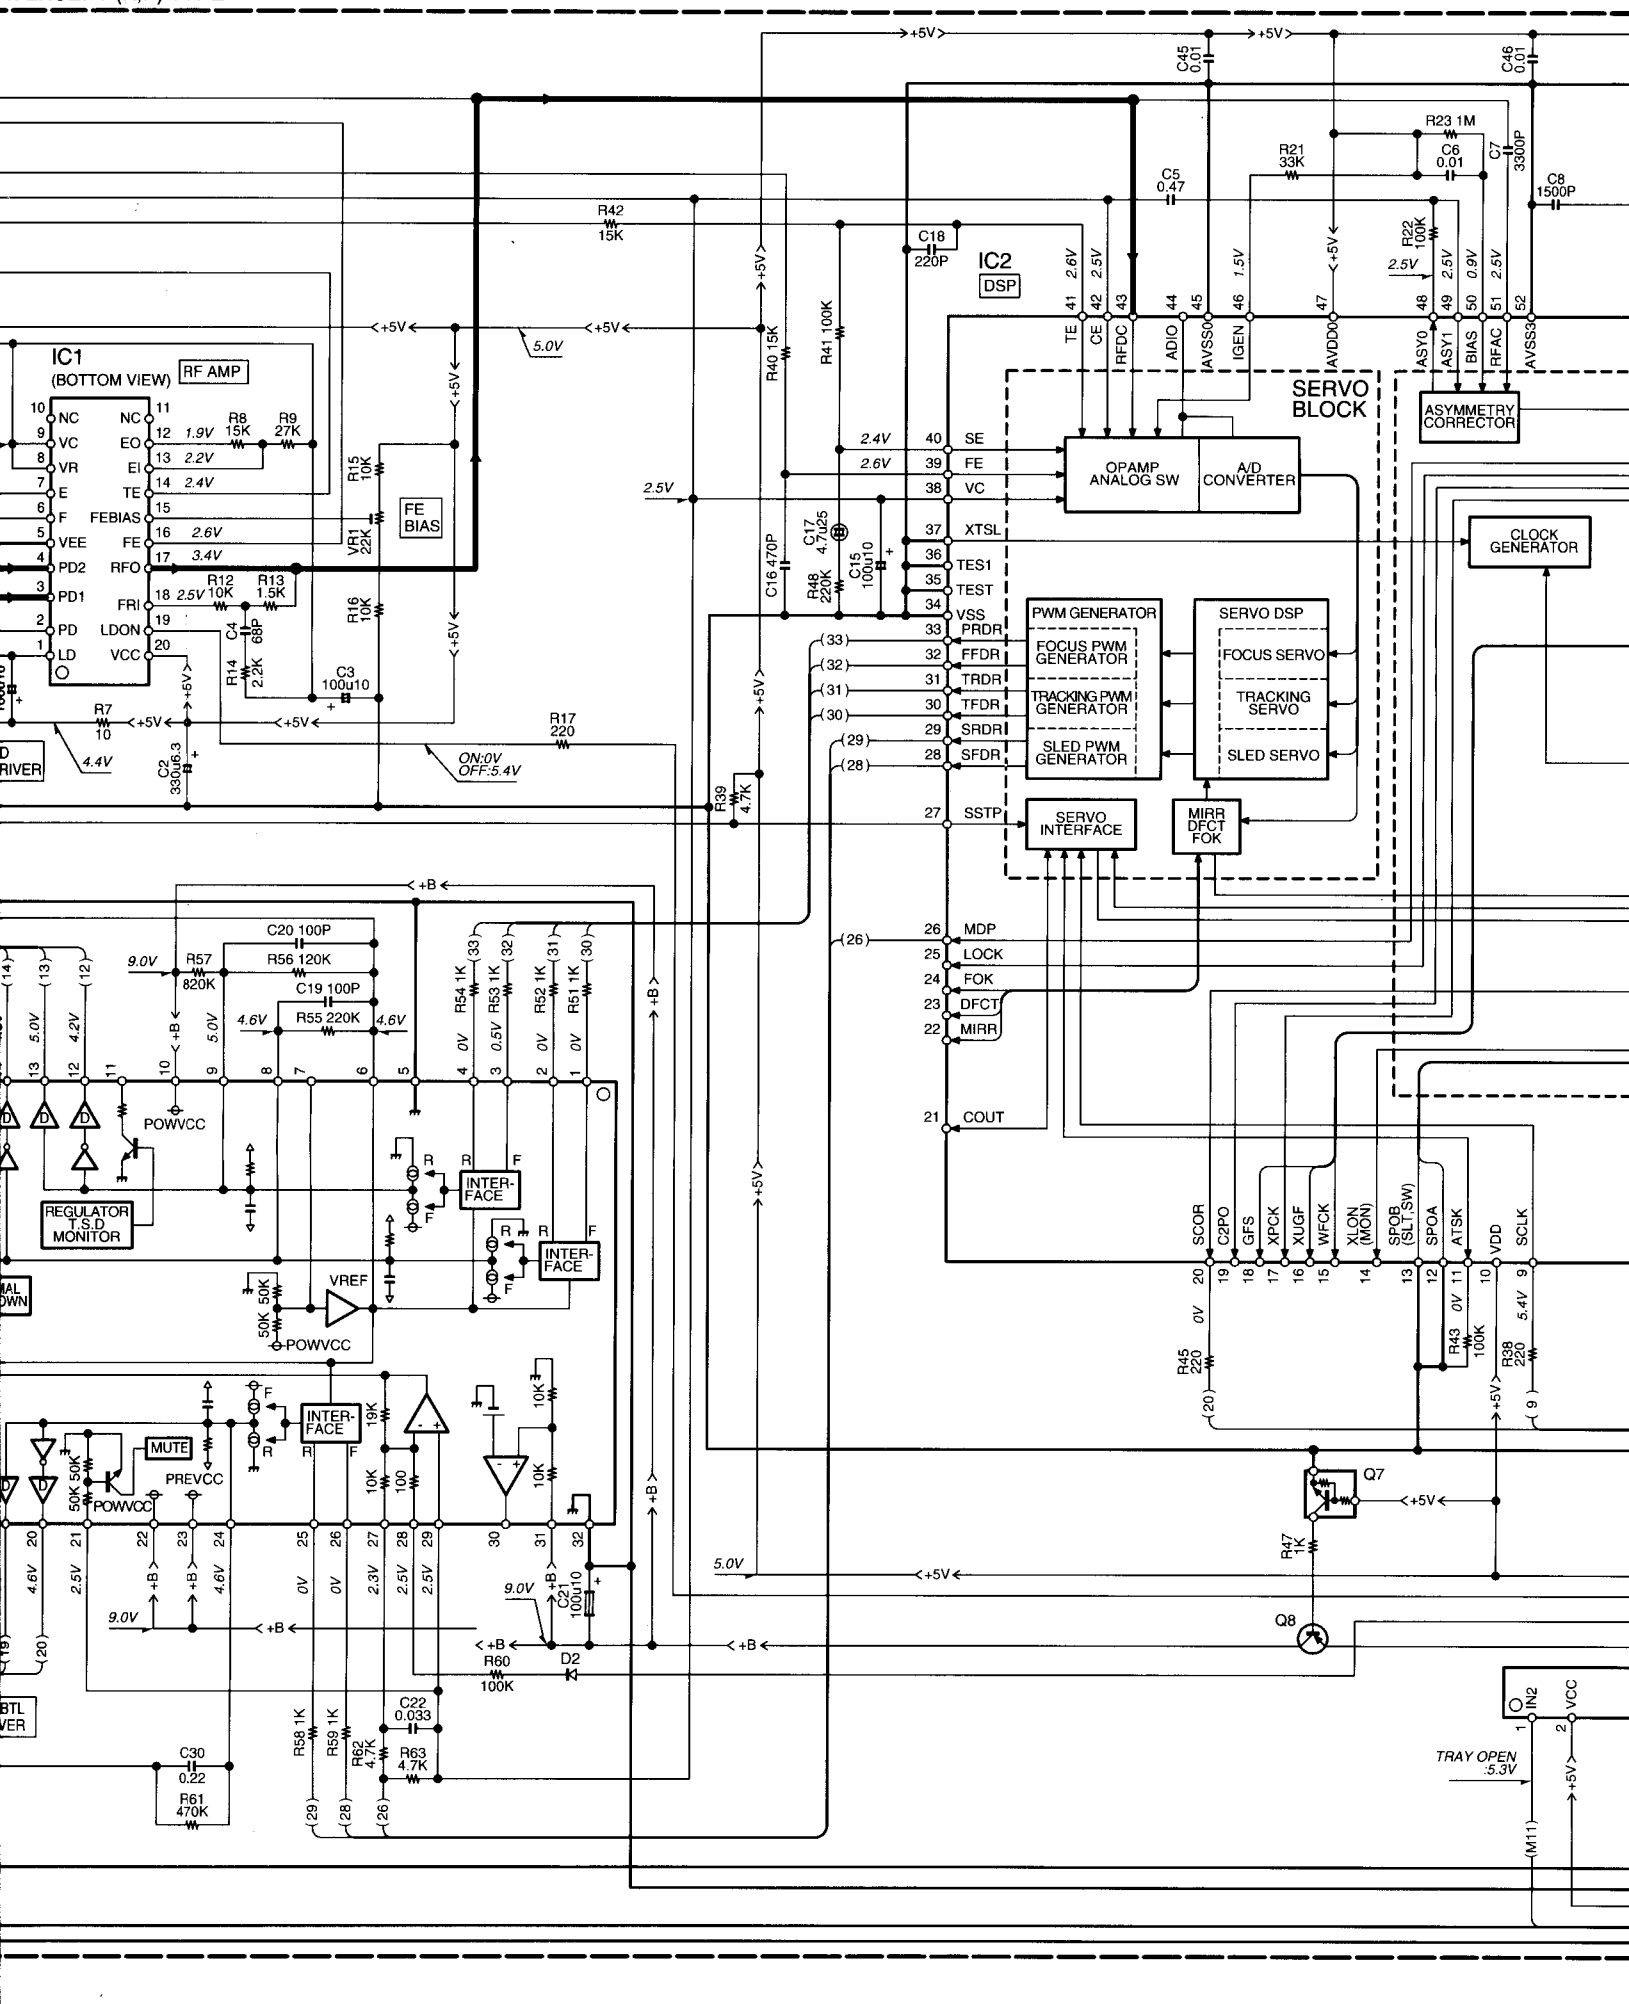

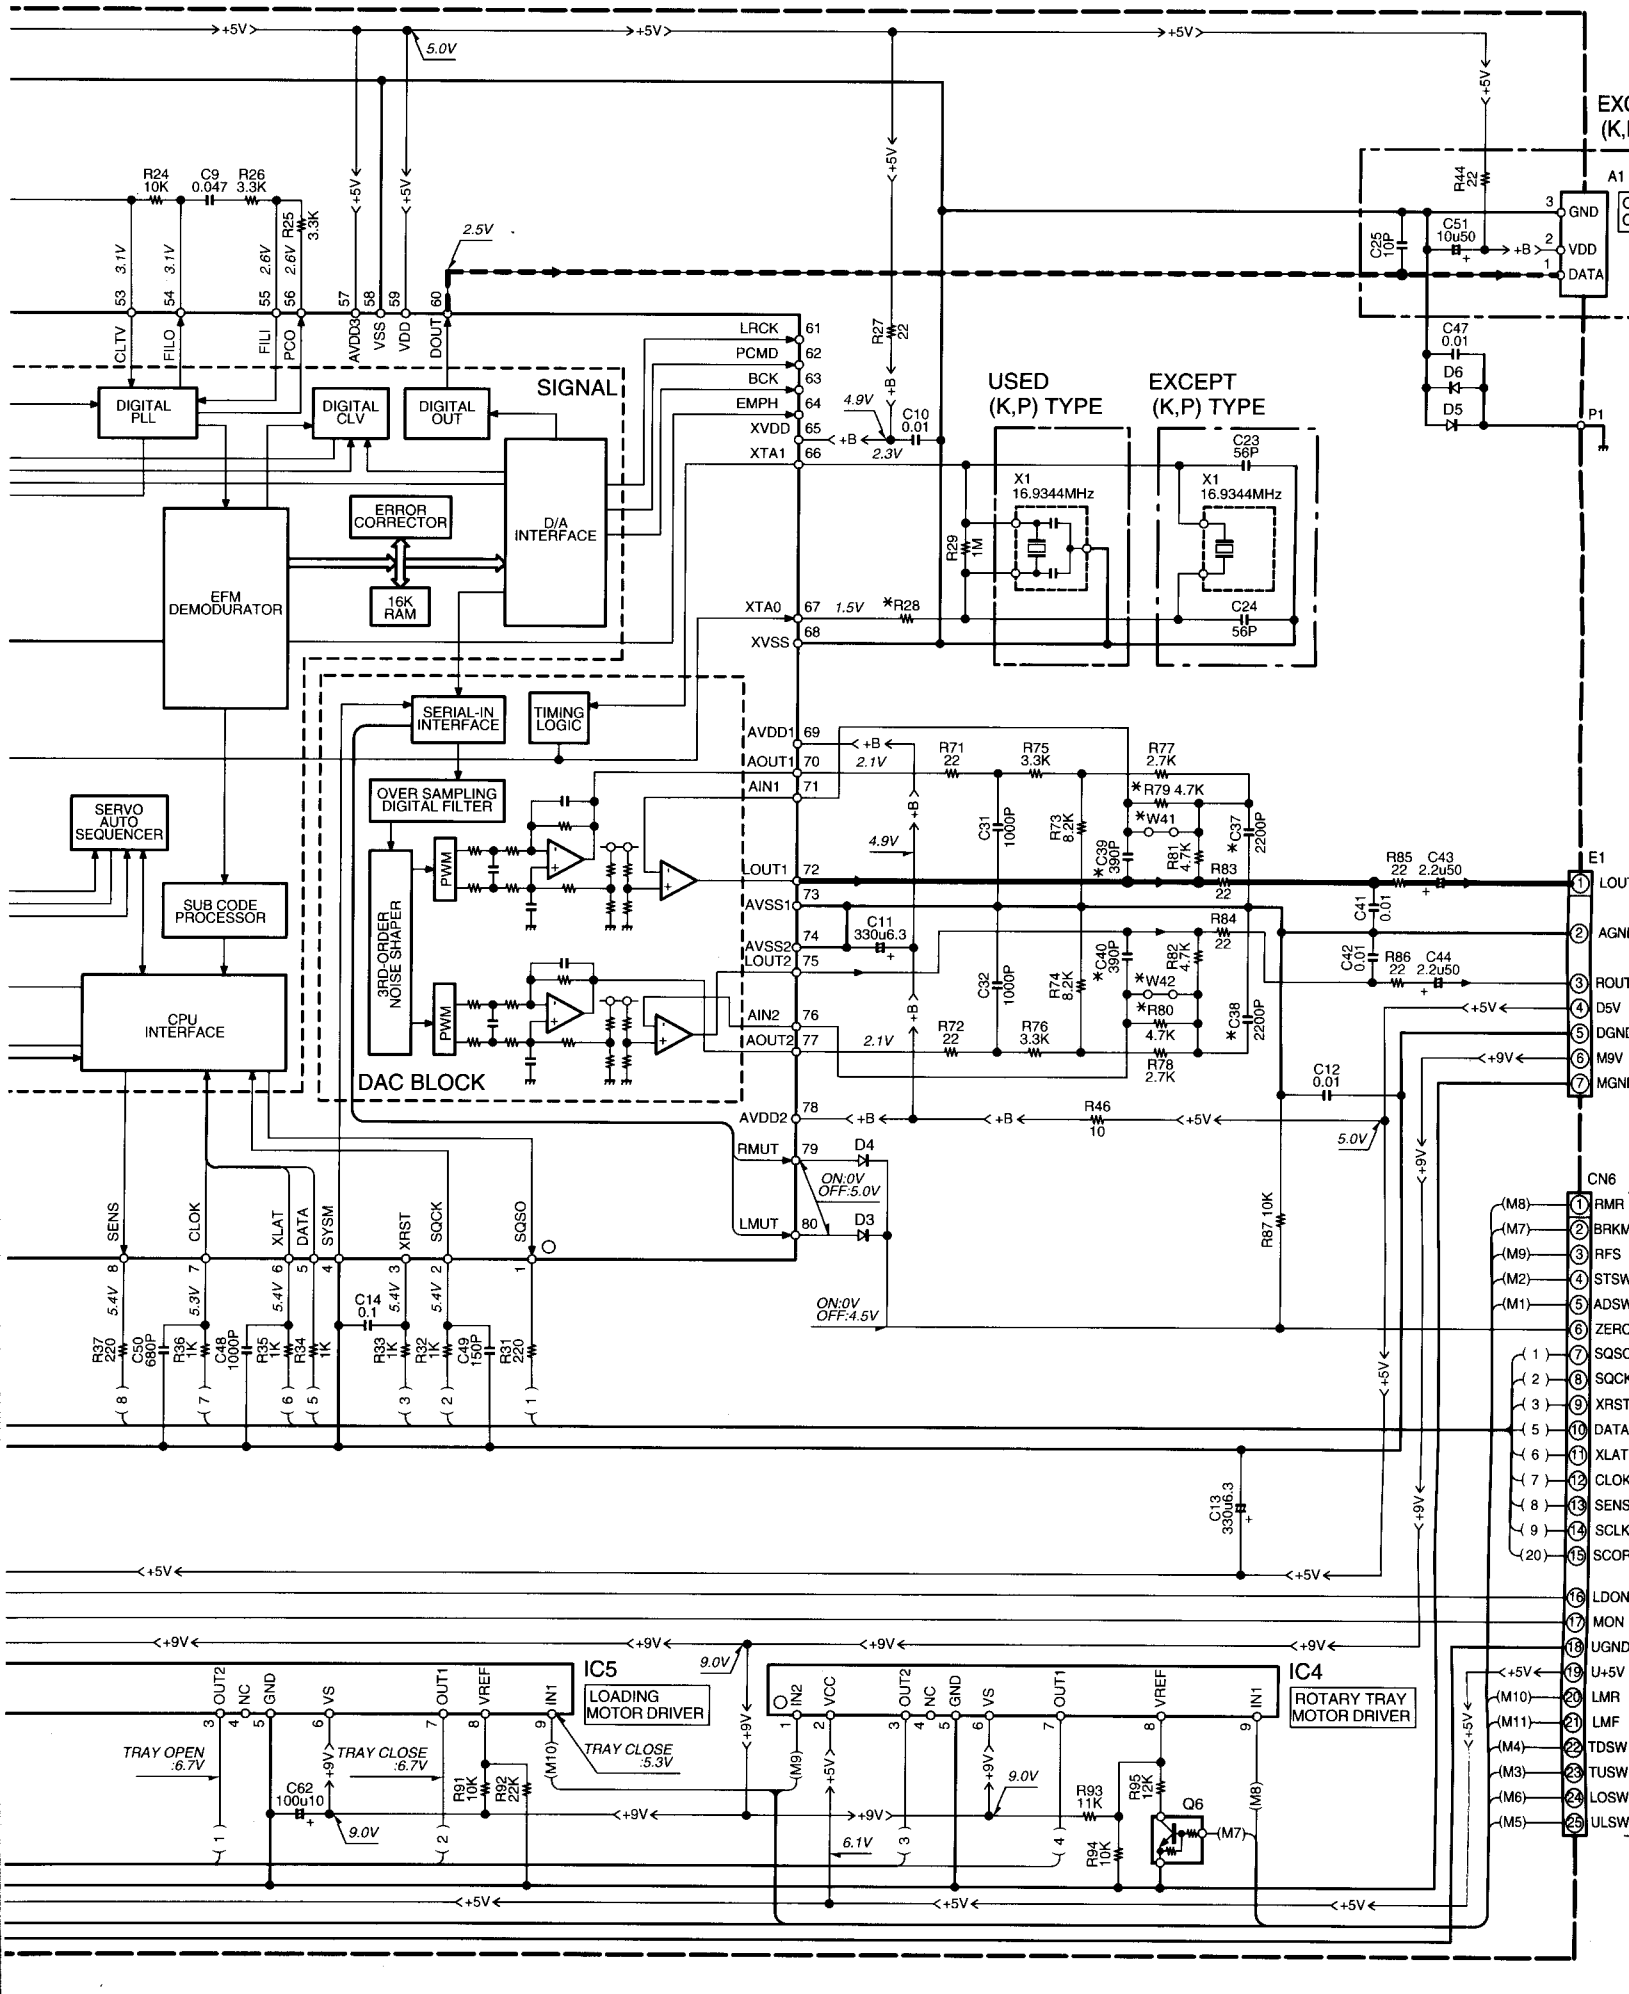
SIGNAL
DIGITAL PLL
DIGITAL CLV
DIGITAL OUT
ERROR CORRECTOR
D/A INTERFACE
EFM DEMODURATOR
16K RAM
SERIAL-IN INTERFACE
TIMING LOGIC
OVER SAMPLING DIGITAL FILTER
3RD-ORDER NOISE SHAPER
PWM
SERVO AUTO SEQUENCER
SUB CODE PROCESSOR
CPU INTERFACE
DAC BLOCK
USED (K,P) TYPE
EXCEPT (K,P) TYPE
X1 16.9344MHz
IC5 LOADING MOTOR DRIVER
IC4 ROTARY TRAY MOTOR DRIVE
TRAY OPEN :6.7V
TRAY CLOSE :6.7V
TRAY CLOSE :5.3V
ON:0V OFF:5.0V
ON:0V OFF:4.5V
CN6
E1
P1
+5V
+9V
+B

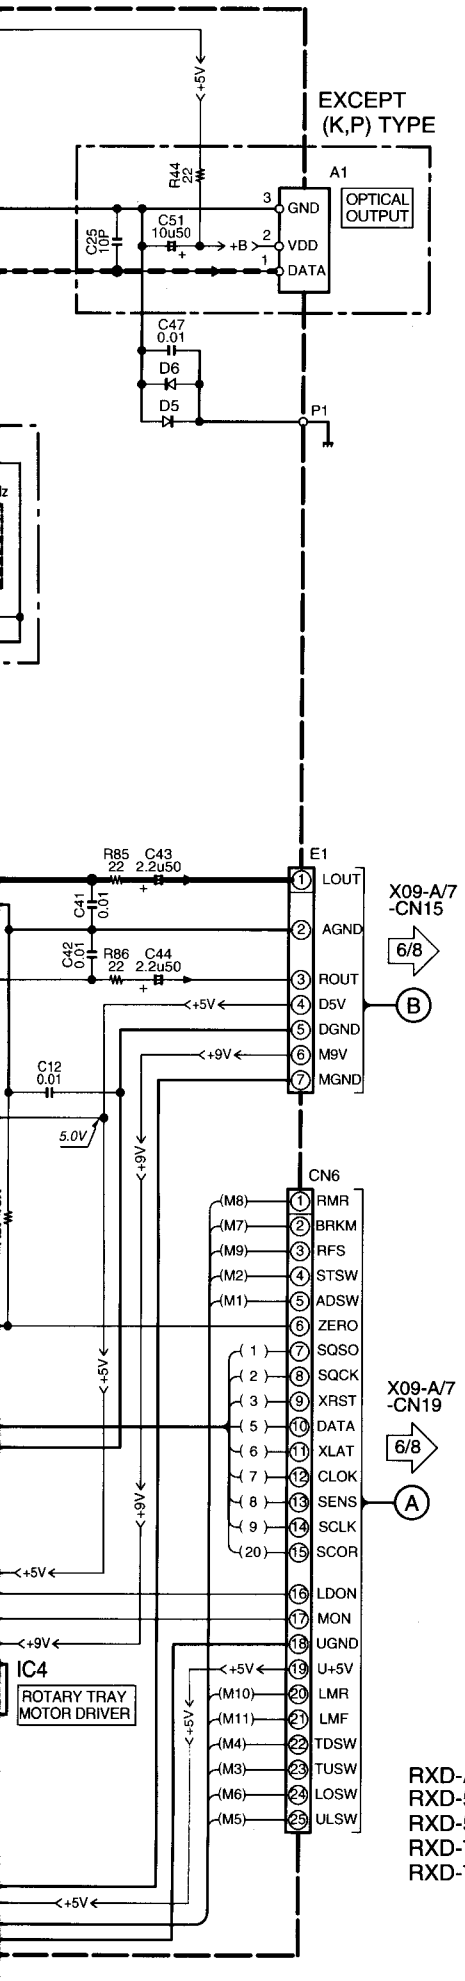

IC1 : CXA1571M
IC2 : CXD2587Q
IC3 : BA5979S
IC4,5 : TA8409S

Q1 : 2SA954(L,K)
Q6,7 : DTC124ESA or UN4212
Q8 : 2SB764(E,F)

D1-6 : 1SS133 or HSS104A

RXD-A5/A8 (X32-3590-10)

DESTINATION		UNIT No.	C23,24, 37-40	R28	R79, 80	W41, 42
COUNTRY	ABB.					
U.S.A.	K	0-10	NO	390	NO	YES
CANADA	P					

EXCEPT RXD-A5/A8 (X32-3592-71)

DESTINATION		UNIT No.	C23,24, 37-40	R28	R79, 80	W41, 42
COUNTRY	ABB.					
JAPAN	J	2-71	YES	680	YES	NO
PX	Y					
GENERAL MARKET	M					
AUSTRALIA	X					
U.K.	T					
EUROPE	E					
EUROPE	E2					
RUSSIA	Q					

CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). ⚠ indicates safety critical components. For continued protection against risk of fire, replace only with same type and rating fuse(s). To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

The DC voltage is an actual reading measured with a high impedance type voltmeter. The measurement value may vary depending on the measuring instruments used or on the product. Refer to the voltage dur ing PLAY unless otherwise specified; The value shown in ( ) is the voltage measured at the moment of STOP.

RXD-A5/A8(K) (1/8)
RXD-501/501E/501W(E) (1/8)
RXD-551/551E/551W/571S(E) (1/8)
RXD-701/701E/701W(E) (1/8)
RXD-751/751E/751W/771S(E) (1/8)

Y39-2850-10

RXD-501/551/571/A5/701/751/771/A

KENWOOD

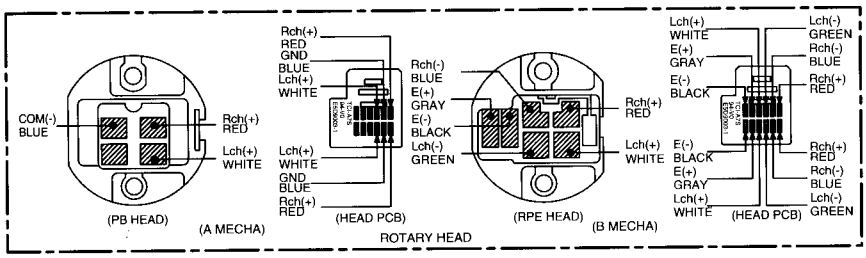

CASSETTE MECHANISM UNIT
(X28-2960-10)

DECK MECHA (D40-1581-X5)

A(PB) MECHA

B(RPE) MECHA

CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). ⚠ indicates safety critical components. For continued protection against risk of fire, replace only with same type and rating fuse(s). To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

The DC voltage is an actual reading measured with a high impedance type voltmeter with a cassette loaded at playba value may vary depending on the measuring instruments used or on the product. Bias circuit DC voltage is measured wi

DOLBY and the double-D symbol are trademarks of Dolby Laboratories Licensing Corporation. Noise reduction circu Dolby Laboratories Licensing Corporation.

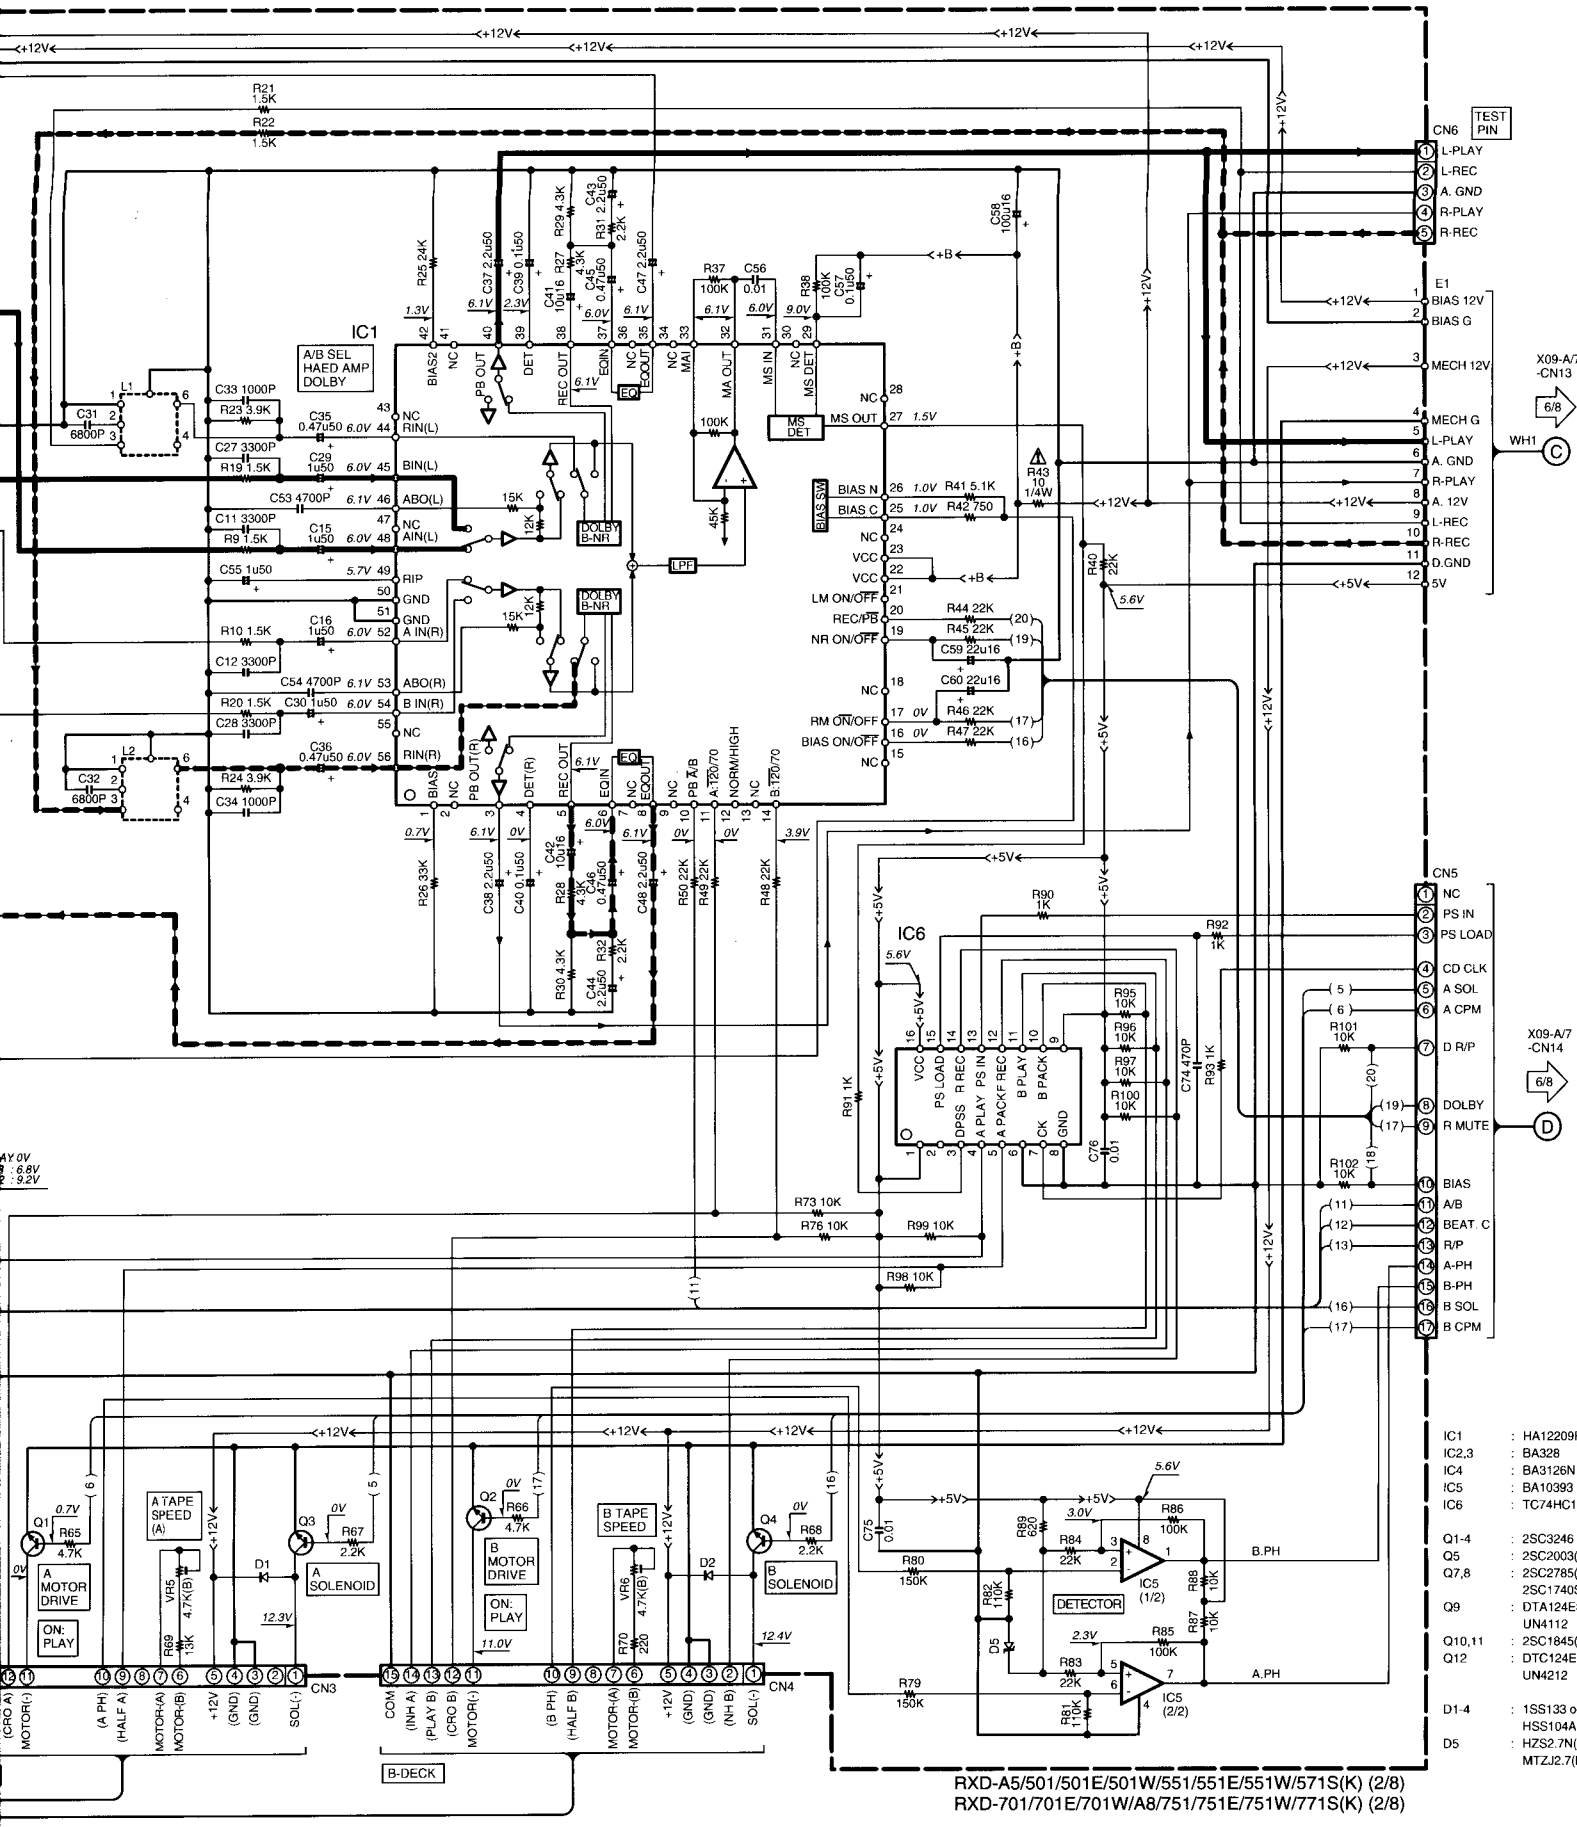

IC1	:	HA12209F
IC2,3	:	BA328
IC4	:	BA3126N
IC5	:	BA10393
IC6	:	TC74HC166AP
Q1-4	:	2SC3246
Q5	:	2SC2003(L,K)
Q7,8	:	2SC2785(F,E) or 2SC1740S(Q,R)
Q9	:	DTA124ESA or UN4112
Q10,11	:	2SC1845(F,E)
Q12	:	DTC124ESA or UN4212
D1-4	:	1SS133 or HSS104A
D5	:	HZS2.7N(B2) or MTZJ2.7(B)

RXD-A5/501/501E/501W/551/551E/551W/571S(K) (2/8)
RXD-701/701E/701W/A8/751/751E/751W/771S(K) (2/8)

eter with a cassette loaded at playback mode. The measurement
Bias circuit DC voltage is measured while in the record mode.

ng Corporation. Noise reduction circuit made under license from

RXD-501/551/571/A5/701/751/771/A8

KENWOOD

TUNER UNIT

(X05-4890-XX) RXD-A5/A8(K,P), RXD-501(J,X), RXD-551(J,Y,M,X), RXD-701(X), RXD-751(Y,M,X)

RXD-A5/A8 (X05-4890-11)

DESTINATION	ABB.	UNIT No.	Ⓐ	C4	C21, 22	C28	W115	A1
COUNTRY								
U.S.A.	K	0-11	NO	NO	0.018	YES	NO	W02-2638-05
CANADA	P							

RXD-501 (X05-4890-XX)

DESTINATION	ABB.	UNIT No.	Ⓐ	C4	C21, 22	C28	W115	A1
COUNTRY								
JAPAN	J	0-01	NO	YES	0.012	NO	NO	W02-2637-05
AUSTRALIA	X	0-71		NO		YES		W02-2638-05

RXD-551 (X05-4890-XX)

DESTINATION	ABB.	UNI
COUNTRY		
JAPAN	J	0
PX	Y	0
GENERAL MARKET	M	0
AUSTRALIA	X	0

RXD-701 (X05-4890-71)

DESTINATION	ABB.	UNI
COUNTRY		
AUSTRALIA	X	0

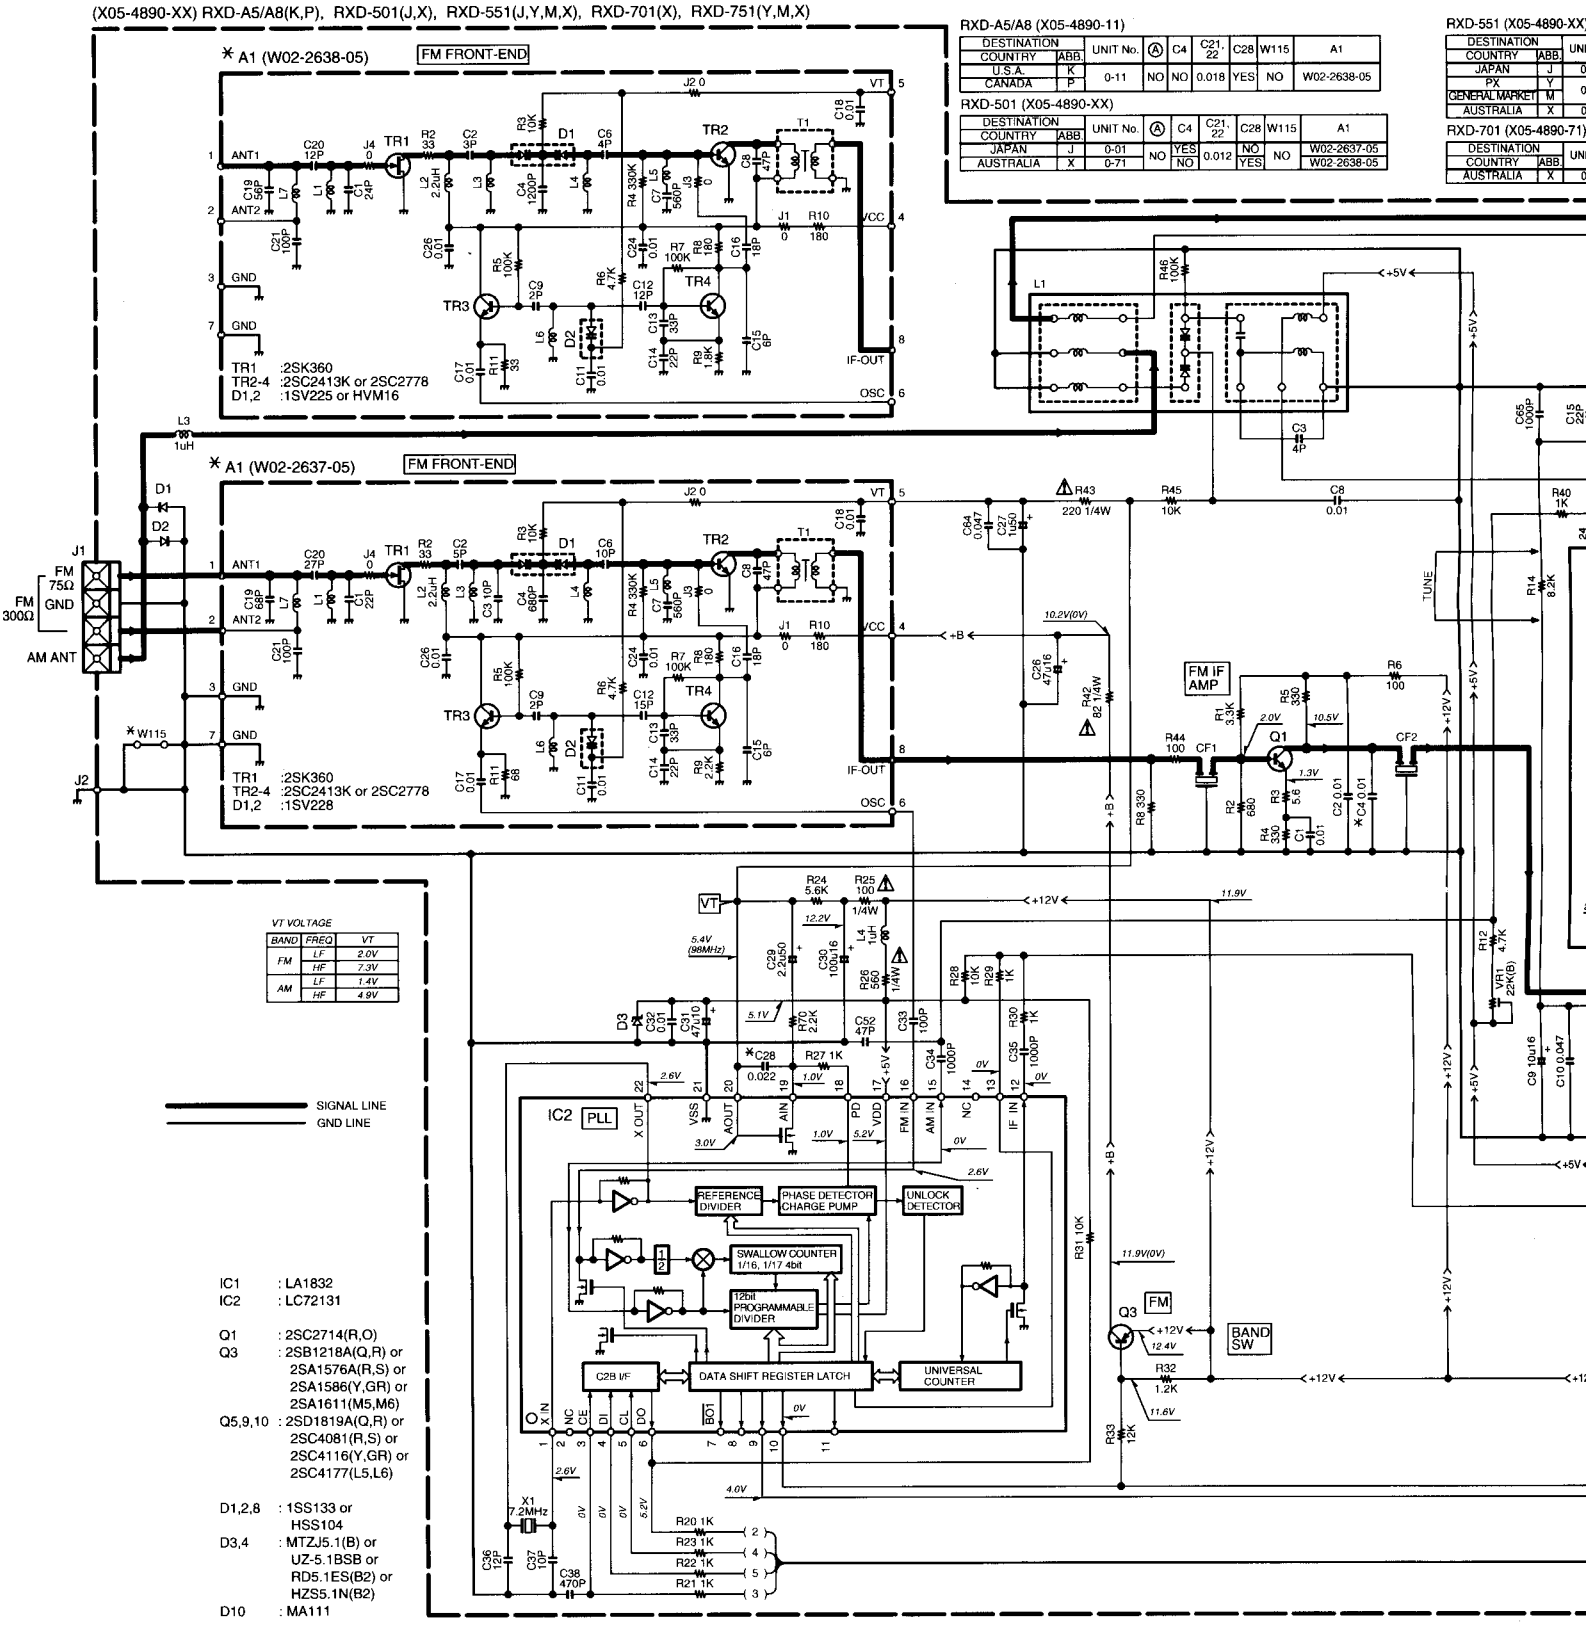

VT VOLTAGE

BAND	FREQ	VT
FM	LF	2.0V
	HF	7.3V
AM	LF	1.4V
	HF	4.9V

IC1 : LA1832
IC2 : LC72131

Q1 : 2SC2714(R,O)
Q3 : 2SB1218A(Q,R) or 2SA1576A(R,S) or 2SA1586(Y,GR) or 2SA1611(M5,M6)
Q5,9,10 : 2SD1819A(Q,R) or 2SC4081(R,S) or 2SC4116(Y,GR) or 2SC4177(L5,L6)

D1,2,8 : 1SS133 or HSS104
D3,4 : MTZJ5.1(B) or UZ-5.1BSB or RD5.1ES(B2) or HZS5.1N(B2)
D10 : MA111

CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). ⚠ indicates safety critical components. For continued protection against risk of fire, replace only with same type and rating fuse(s). To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

The DC voltage is an actual reading measured with a meter as the AM/FM signal generator is specified to the list below. The measurement value may vary dependi ments used or on the product. The value shown in sured in the AM made.

MODE	CARRIER	MODULATION	
		FREQUENCY	DEVI
FM	98MHz	1kHz	STEREO 67.5k
AM	1000(999)kHz	400Hz	MONO 30% MO

C21, 22	C28	W115	A1
0.018	YES	NO	W02-2638-05

C21, 22	C28	W115	A1
0.012	NO YES	NO	W02-2637-05 W02-2638-05

RXD-551 (X05-4890-XX)

DESTINATION	ABB.	UNIT No.	Ⓐ	C4	C21, 22	C28	W115	A1
JAPAN	J	0-01	NO	YES	0.012	NO	NO	W02-2637-05
PX	Y	0-20	YES	NO		YES	YES	W02-2638-05
GENERAL MARKET	M						NO	
AUSTRALIA	X	0-71	NO					

RXD-701 (X05-4890-71)

DESTINATION	ABB.	UNIT No.	Ⓐ	C4	C21, 22	C28	W115	A1
AUSTRALIA	X	0-71	NO	NO	0.012	YES	NO	W02-2638-05

RXD-751 (X05-4890-XX)

DESTINATION	ABB.	UNIT No.	Ⓐ	C4	C21, 22	C28	W115	A1
PX	Y	0-20	YES	NO	0.012	YES	YES	W02-2638-05
GENERAL MARKET	M						NO	
AUSTRALIA	X	0-71	NO					

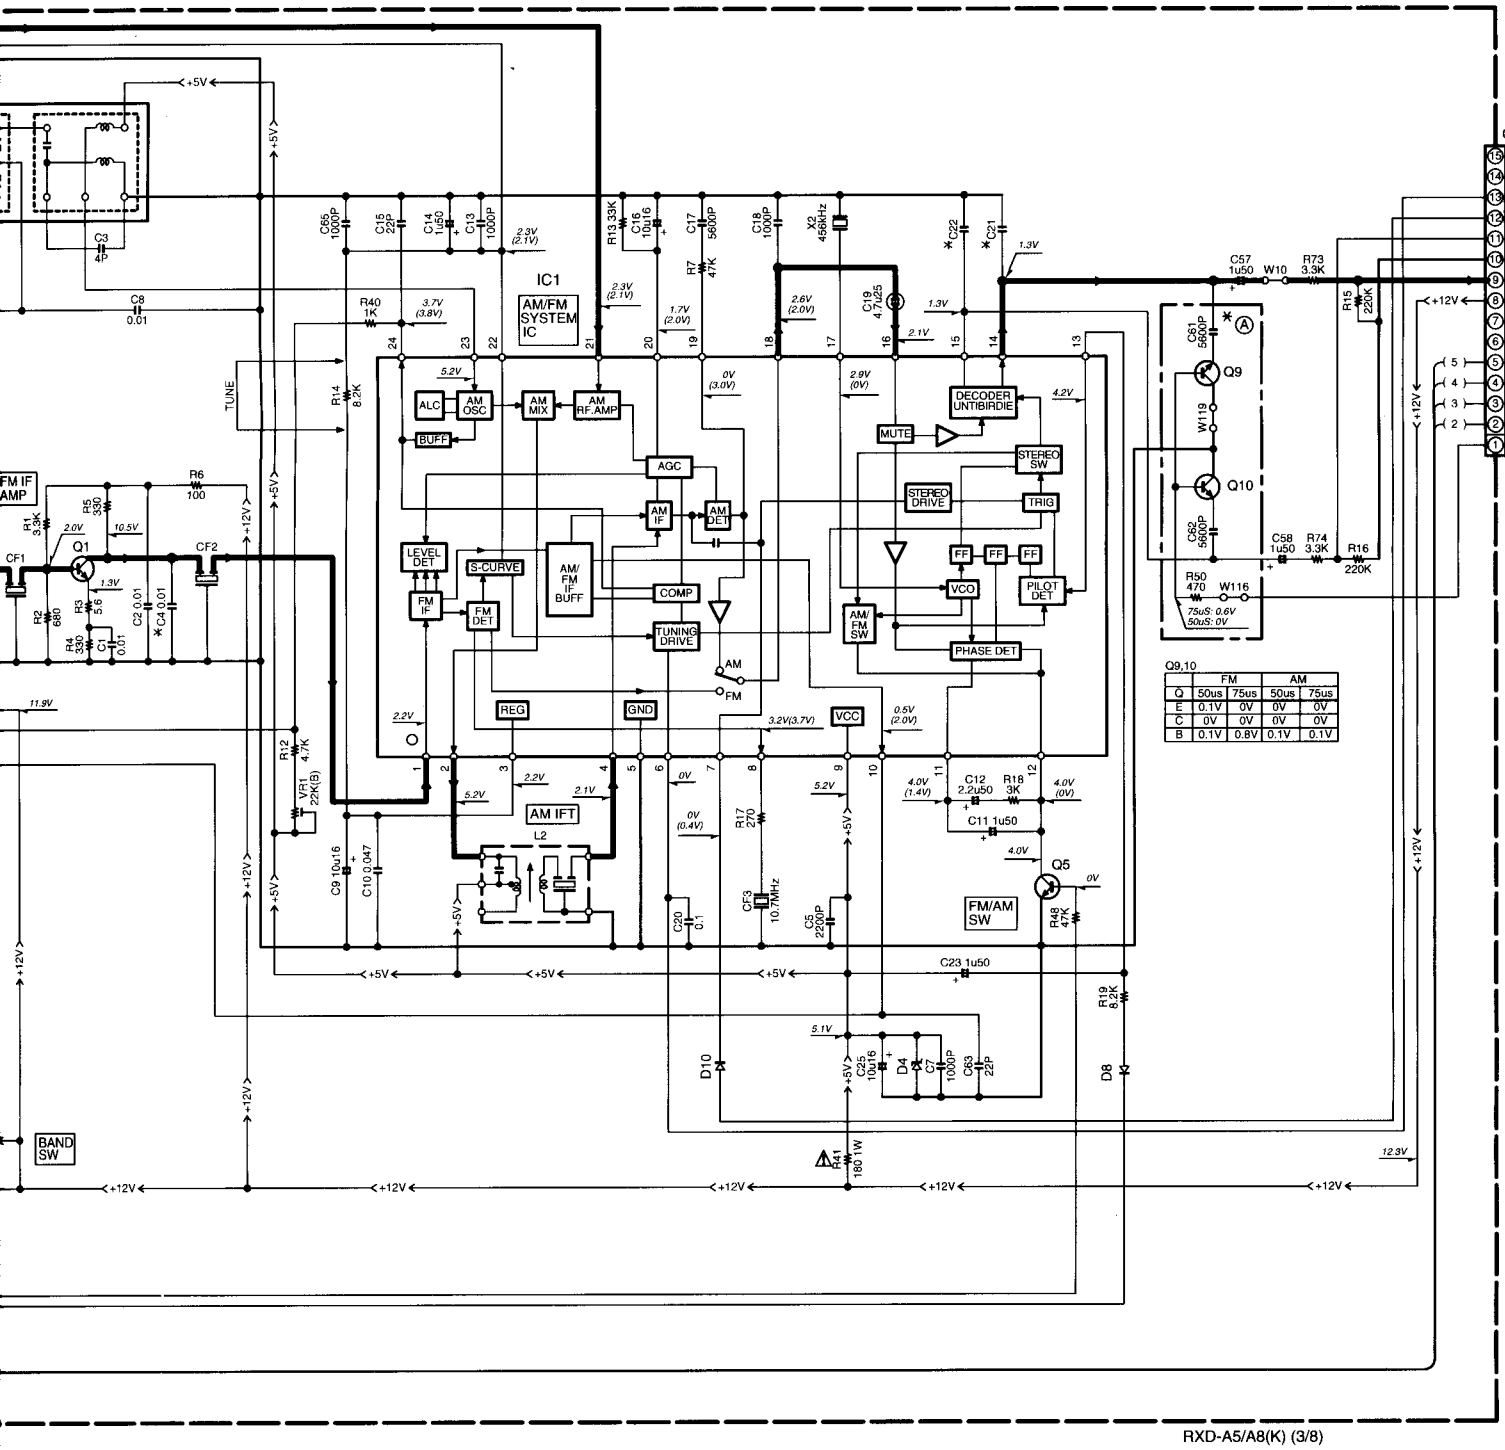

RXD-A5/A8(K) (3/8)
RXD-501(J,X)/RXD-551(J,Y,M,X) (3/8)
RXD-701(X)/RXD-751(Y,M,X) (3/8)

age is an actual reading measured with a high impedance type volt-
AM/FM signal generator is specified to the conditions as shown in the
he measurement value may vary depending on the measuring instru-
or on the product. The value shown in ( ) is actual reading mea-
AM made.

CARRIER	MODULATION		ANT INPUT
	FREQUENCY	DEVIATION	
98MHz	1kHz	STEREO 67.5kHz 7.5kHz(Pilot)	60dB
0(999)kHz	400Hz	MONO 30% MOD	60dB

RXD-501/551/571/A5/701/751/771

KENWOOD

TUNER UNIT

(X05-490X-XX) RXD-501(T,E) RXD-551(T,E) RXD-701(T,E) RXD-751(T,E) RXD-501E(E2) RXD-551E(E2) RXD-701E(E2) RXD-751E(E2) RXD-501W(Q) RXD-551W(Q)

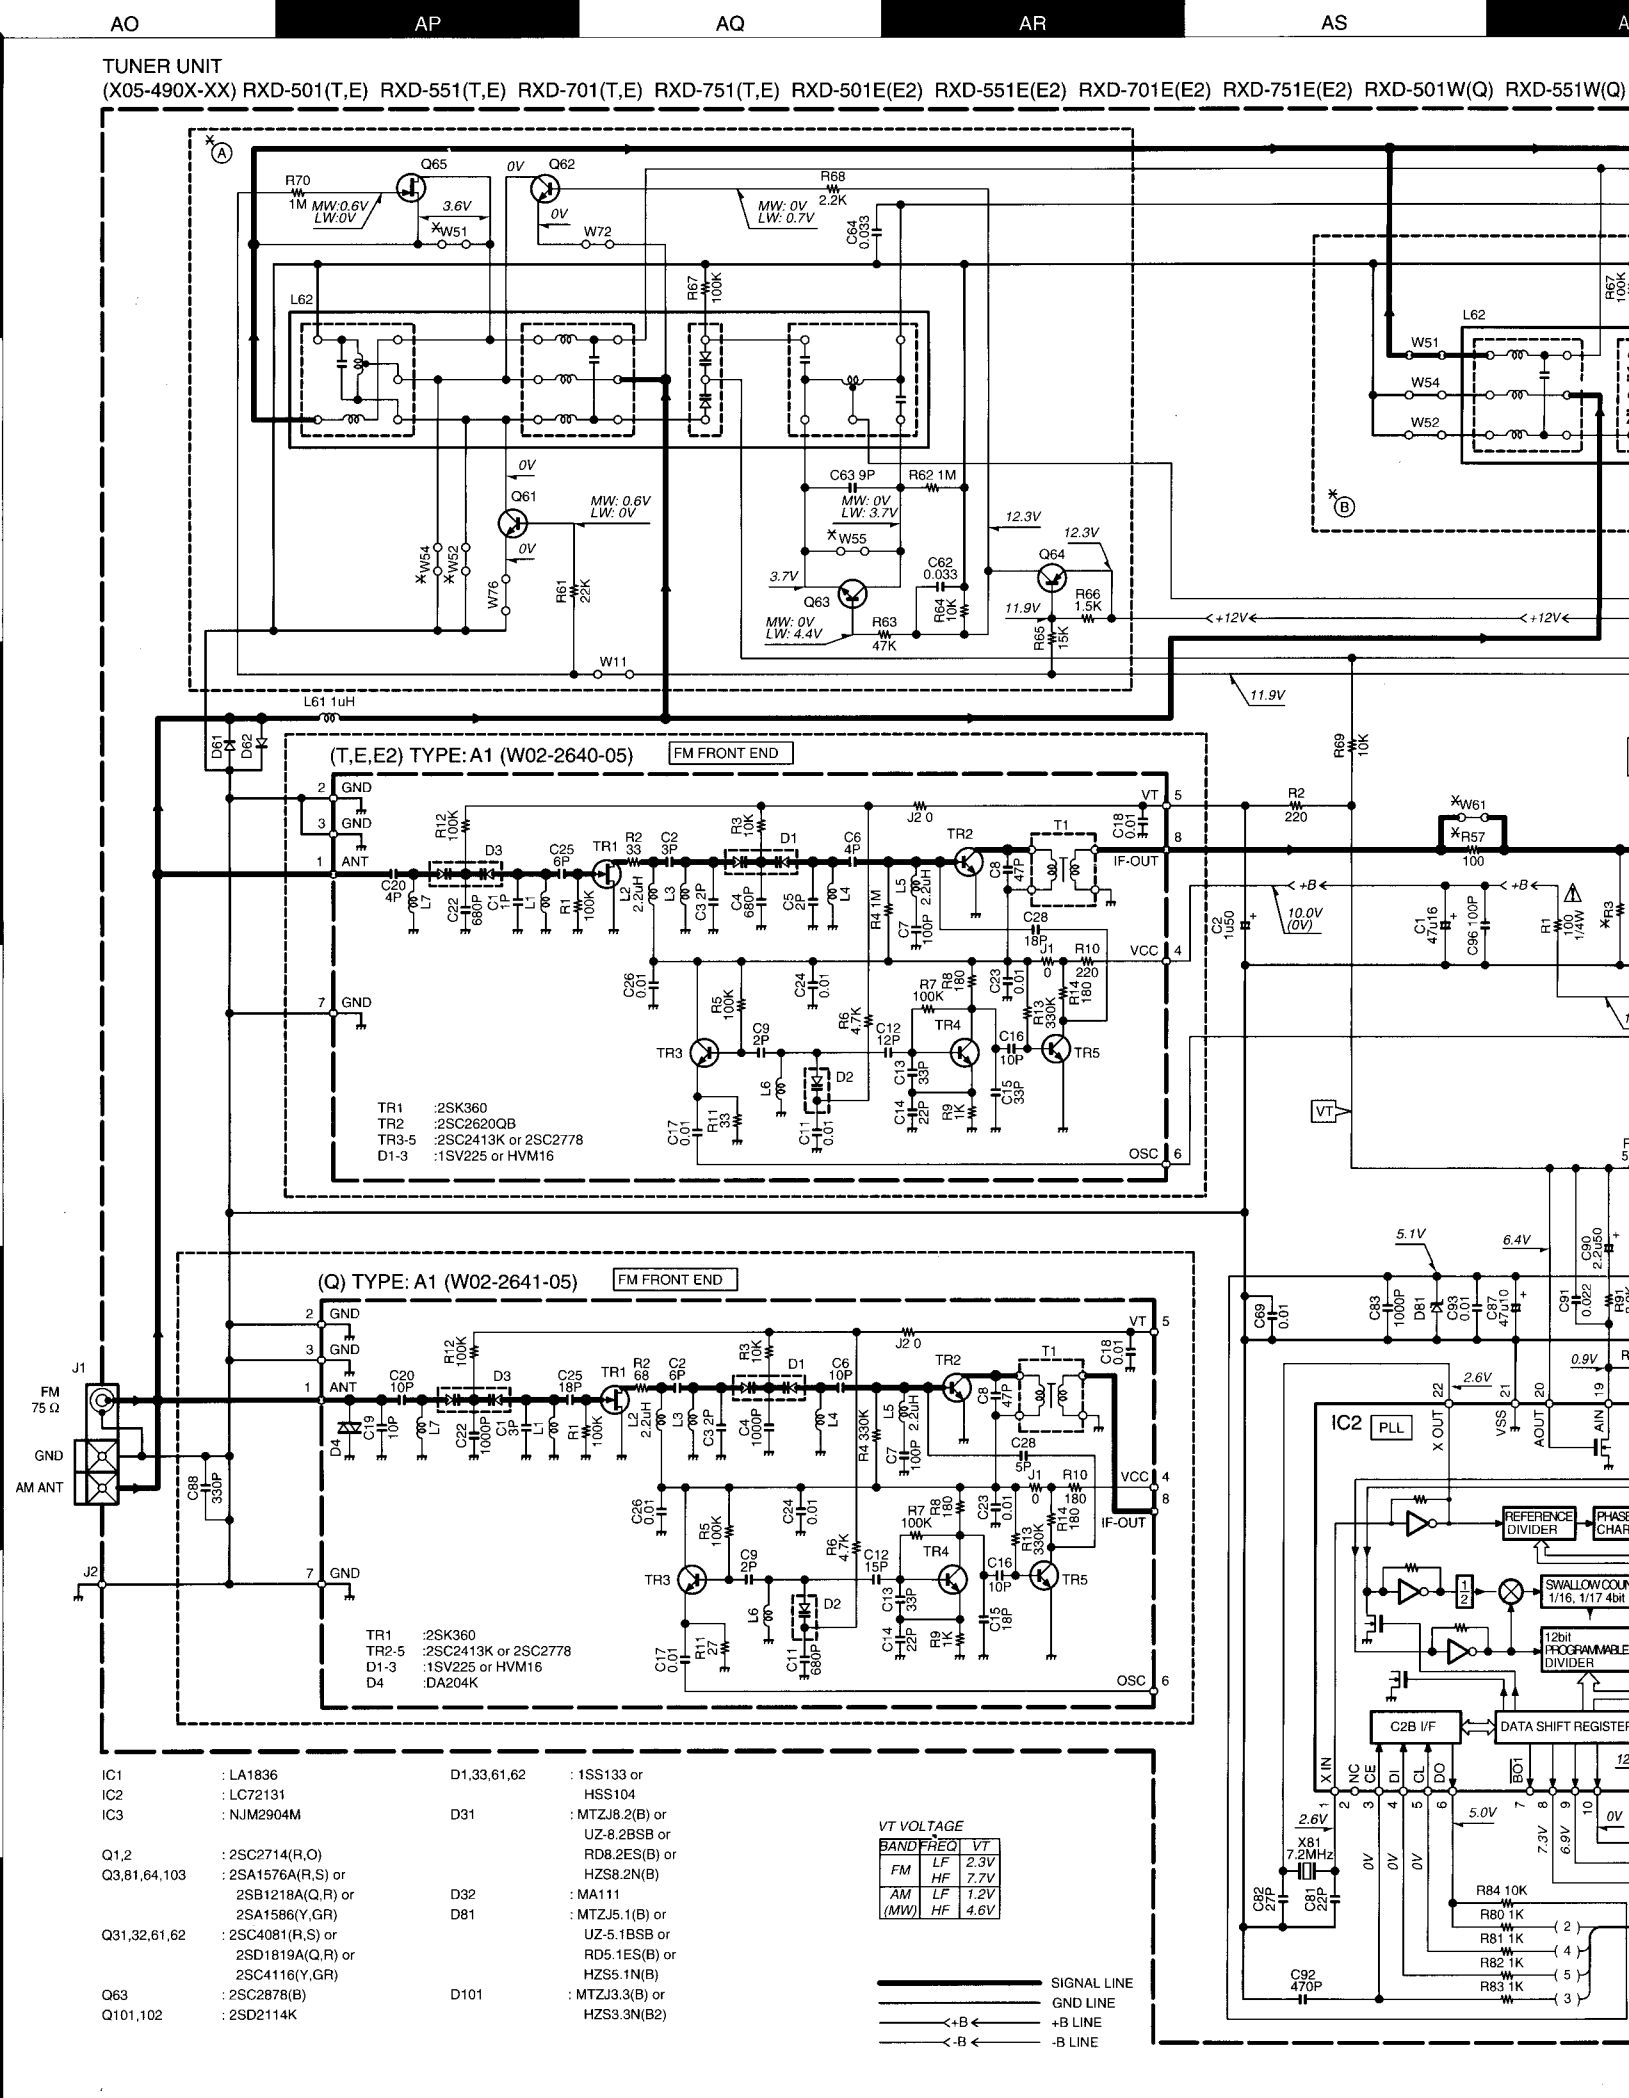

IC1	: LA1836	D1,33,61,62	: 1SS133 or HSS104
IC2	: LC72131	D31	: MTZJ8.2(B) or UZ-8.2BSB or RD8.2ES(B) or HZS8.2N(B)
IC3	: NJM2904M	D32	: MA111
Q1,2	: 2SC2714(R,O)	D81	: MTZJ5.1(B) or UZ-5.1BSB or RD5.1ES(B) or HZS5.1N(B)
Q3,81,64,103	: 2SA1576A(R,S) or 2SB1218A(Q,R) or 2SA1586(Y,GR)	D101	: MTZJ3.3(B) or HZS3.3N(B2)
Q31,32,61,62	: 2SC4081(R,S) or 2SD1819A(Q,R) or 2SC4116(Y,GR)		
Q63	: 2SC2878(B)		
Q101,102	: 2SD2114K		

VT VOLTAGE

BAND	FREQ	VT
FM	LF	2.3V
	HF	7.7V
AM (MW)	LF	1.2V
	HF	4.6V

SIGNAL LINE
GND LINE
+B LINE
-B LINE

D-751E(E2) RXD-501W(Q) RXD-551W(Q) RXD-701W(Q) RXD-751W(Q)

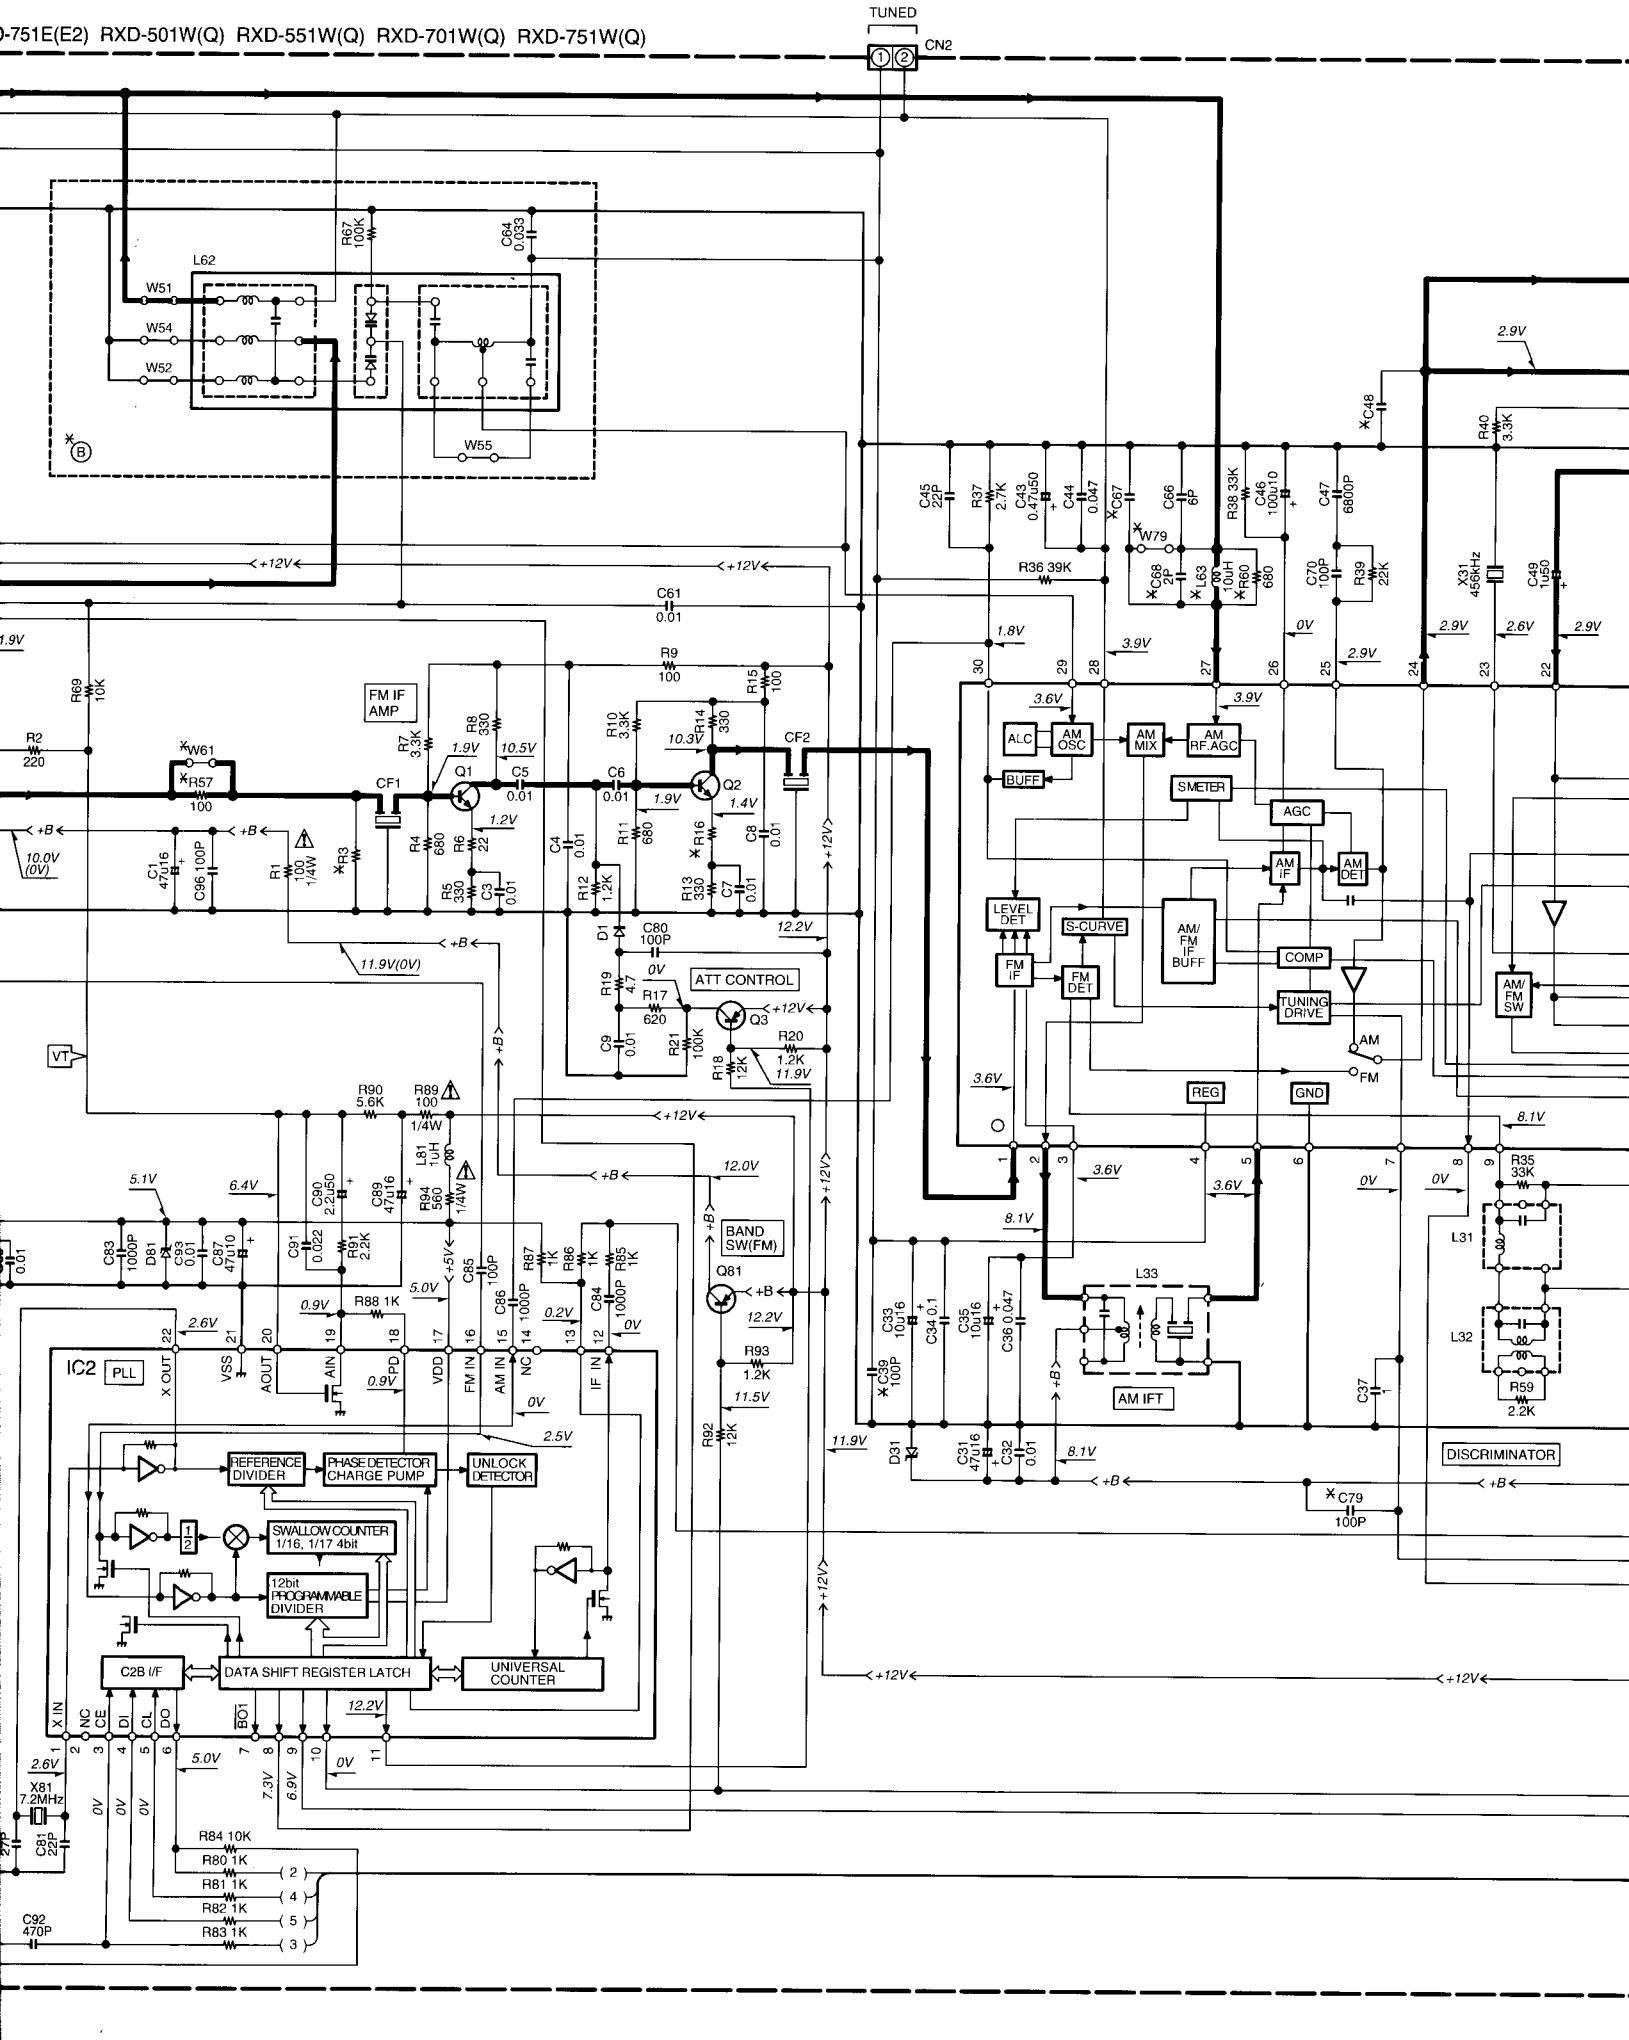

RXD-501/551/701/751 (X05-490X-XX)

DESTINATION		UNIT No.	Ⓐ	Ⓑ	C39,59, 79,88	C48	C53, 54	C55, 56	C67	C68	C77, 78	R3	R16	R43, 44
COUNTRY	ABB.													
U.K.	T	0-51	YES	NO	NO	560P	0.015	2.2u35	33P	NO	YES	3.3K	22	22K
EUROPE	E	2-70	NO	YES					22P	YES				

RXD-501E/551E/701E/751E (X05-4902-70)

DESTINATION		UNIT No.	Ⓐ	Ⓑ	C39,59, 79,88	C48	C53, 54	C55, 56	C67	C68,77, 78	R3	R16	R43, 44
COUNTRY	ABB.												
EUROPE	E2	2-70	NO	YES	NO	560P	0.015	2.2u35	22P	YES	3.3K	22	22K

RXD-501W/551W/701W/751W (X05-4903-81)

DESTINATION		UNIT No.	Ⓐ	Ⓑ	C39,59, 79,88	C48	C53, 54	C55, 56	C67	C68,77, 78	R3	R16	R43, 44
COUNTRY	ABB.												
PUSSIA	Q	3-81	YES	NO	YES	470P	0.018	3.3u25	22P	NO	330	47	12K

POLAR UNIT
(X04-1313-80) (Q)TYPE ONLY

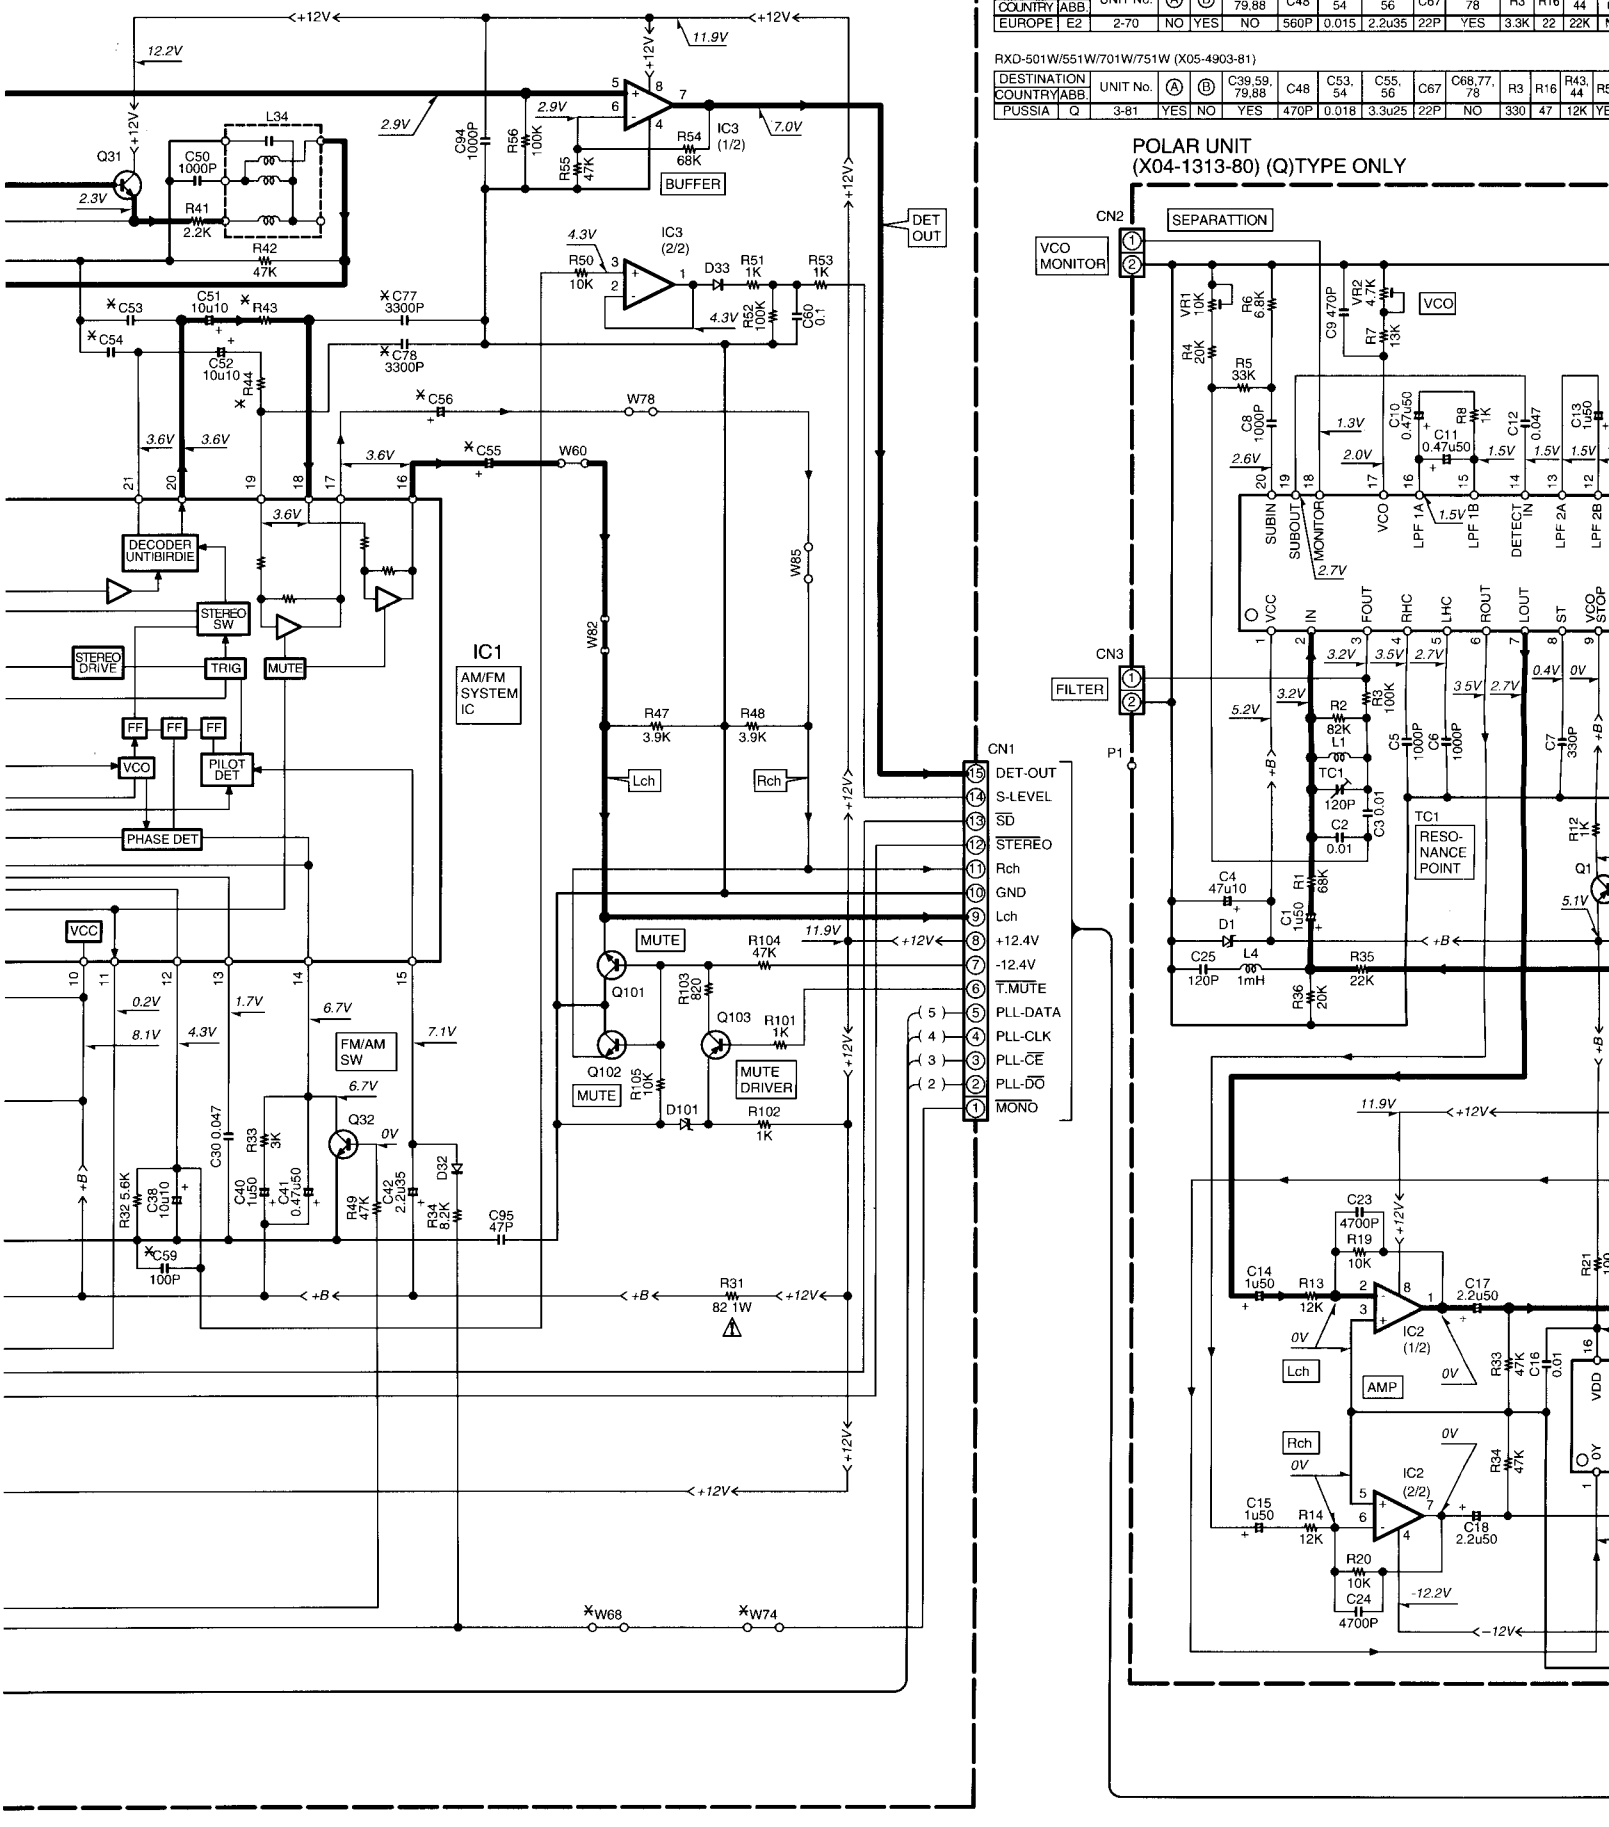

59,38	C48	C53,54	C55,56	C67	C68	C77,78	R3	R16	R43,44	R57	R60	L62	L63	W51,52,54,55	W61	W68,74,79	J2	A1
0	560P	0.015	2.2u35	33P	NO	YES	3.3K	22	22K	NO	YES	L39-1368	NO	NO	YES	NO	F10-1053	W02-2640
				22P	YES						NO	L39-1367	YES	YES				

59,38	C48	C53,54	C55,56	C67	C68,77,78	R3	R16	R43,44	R57,60	L62	L63	W68,74,79	W51,52,54,55,61	J2	A1
0	560P	0.015	2.2u35	22P	YES	3.3K	22	22K	NO	L39-1367	YES	NO	YES	F10-1053	W02-2640

59,38	C48	C53,54	C55,56	C67	C68,77,78	R3	R16	R43,44	R57	R60	L62	L63	W68,74,79	W51,52,54,55,61	J2	A1
S	470P	0.018	3.3u25	22P	NO	330	47	12K	YES	NO	L39-1368	NO	YES	NO	F10-1088	W02-2641

The DC voltage is an actual reading measured with a high impedance type voltmeter as the AM/FM signal generator is specified to the conditions as shown in the list below. The measurement value may vary depending on the measuring instruments used or on the product. The value shown in ( ) is actual reading measured in the AM made.

MODE	CARRIER	MODULATION		ANT INPUT
		FREQUENCY	DEVIATION	
FM	98MHz	1kHz	STEREO 67.5kHz 7.5kHz(Pilot)	60dB
AM	1000(999)kHz	400Hz	MONO 30% MOD	60dB

) (Q)TYPE ONLY

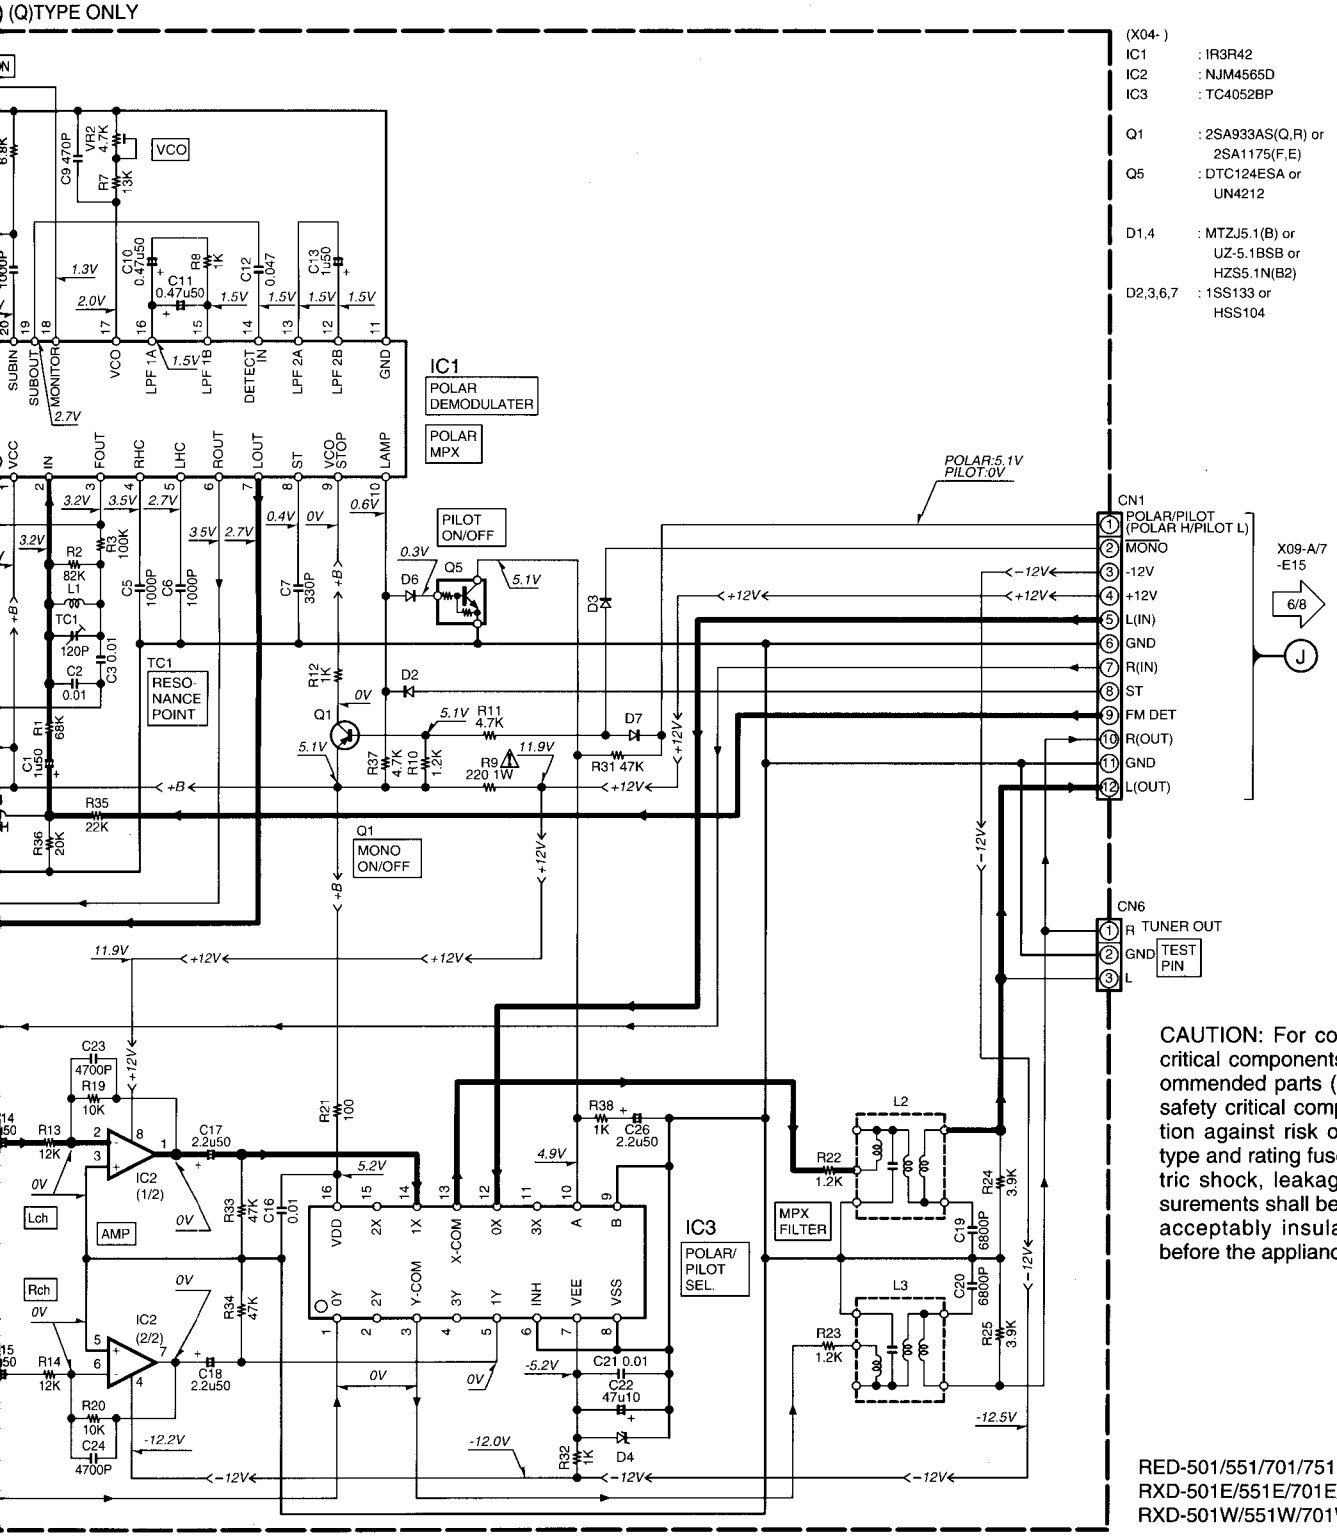

CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). ⚠ indicates safety critical components. For continued protection against risk of fire, replace only with same type and rating fuse(s). To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

RED-501/551/701/751(T,E) (4/8)
RXD-501E/551E/701E/751E(E2) (4/8)
RXD-501W/551W/701W/751W(Q) (4/8)

RXD-501/551/571/A5/701/751/771/A

Y39-2850-10

KENWOOD

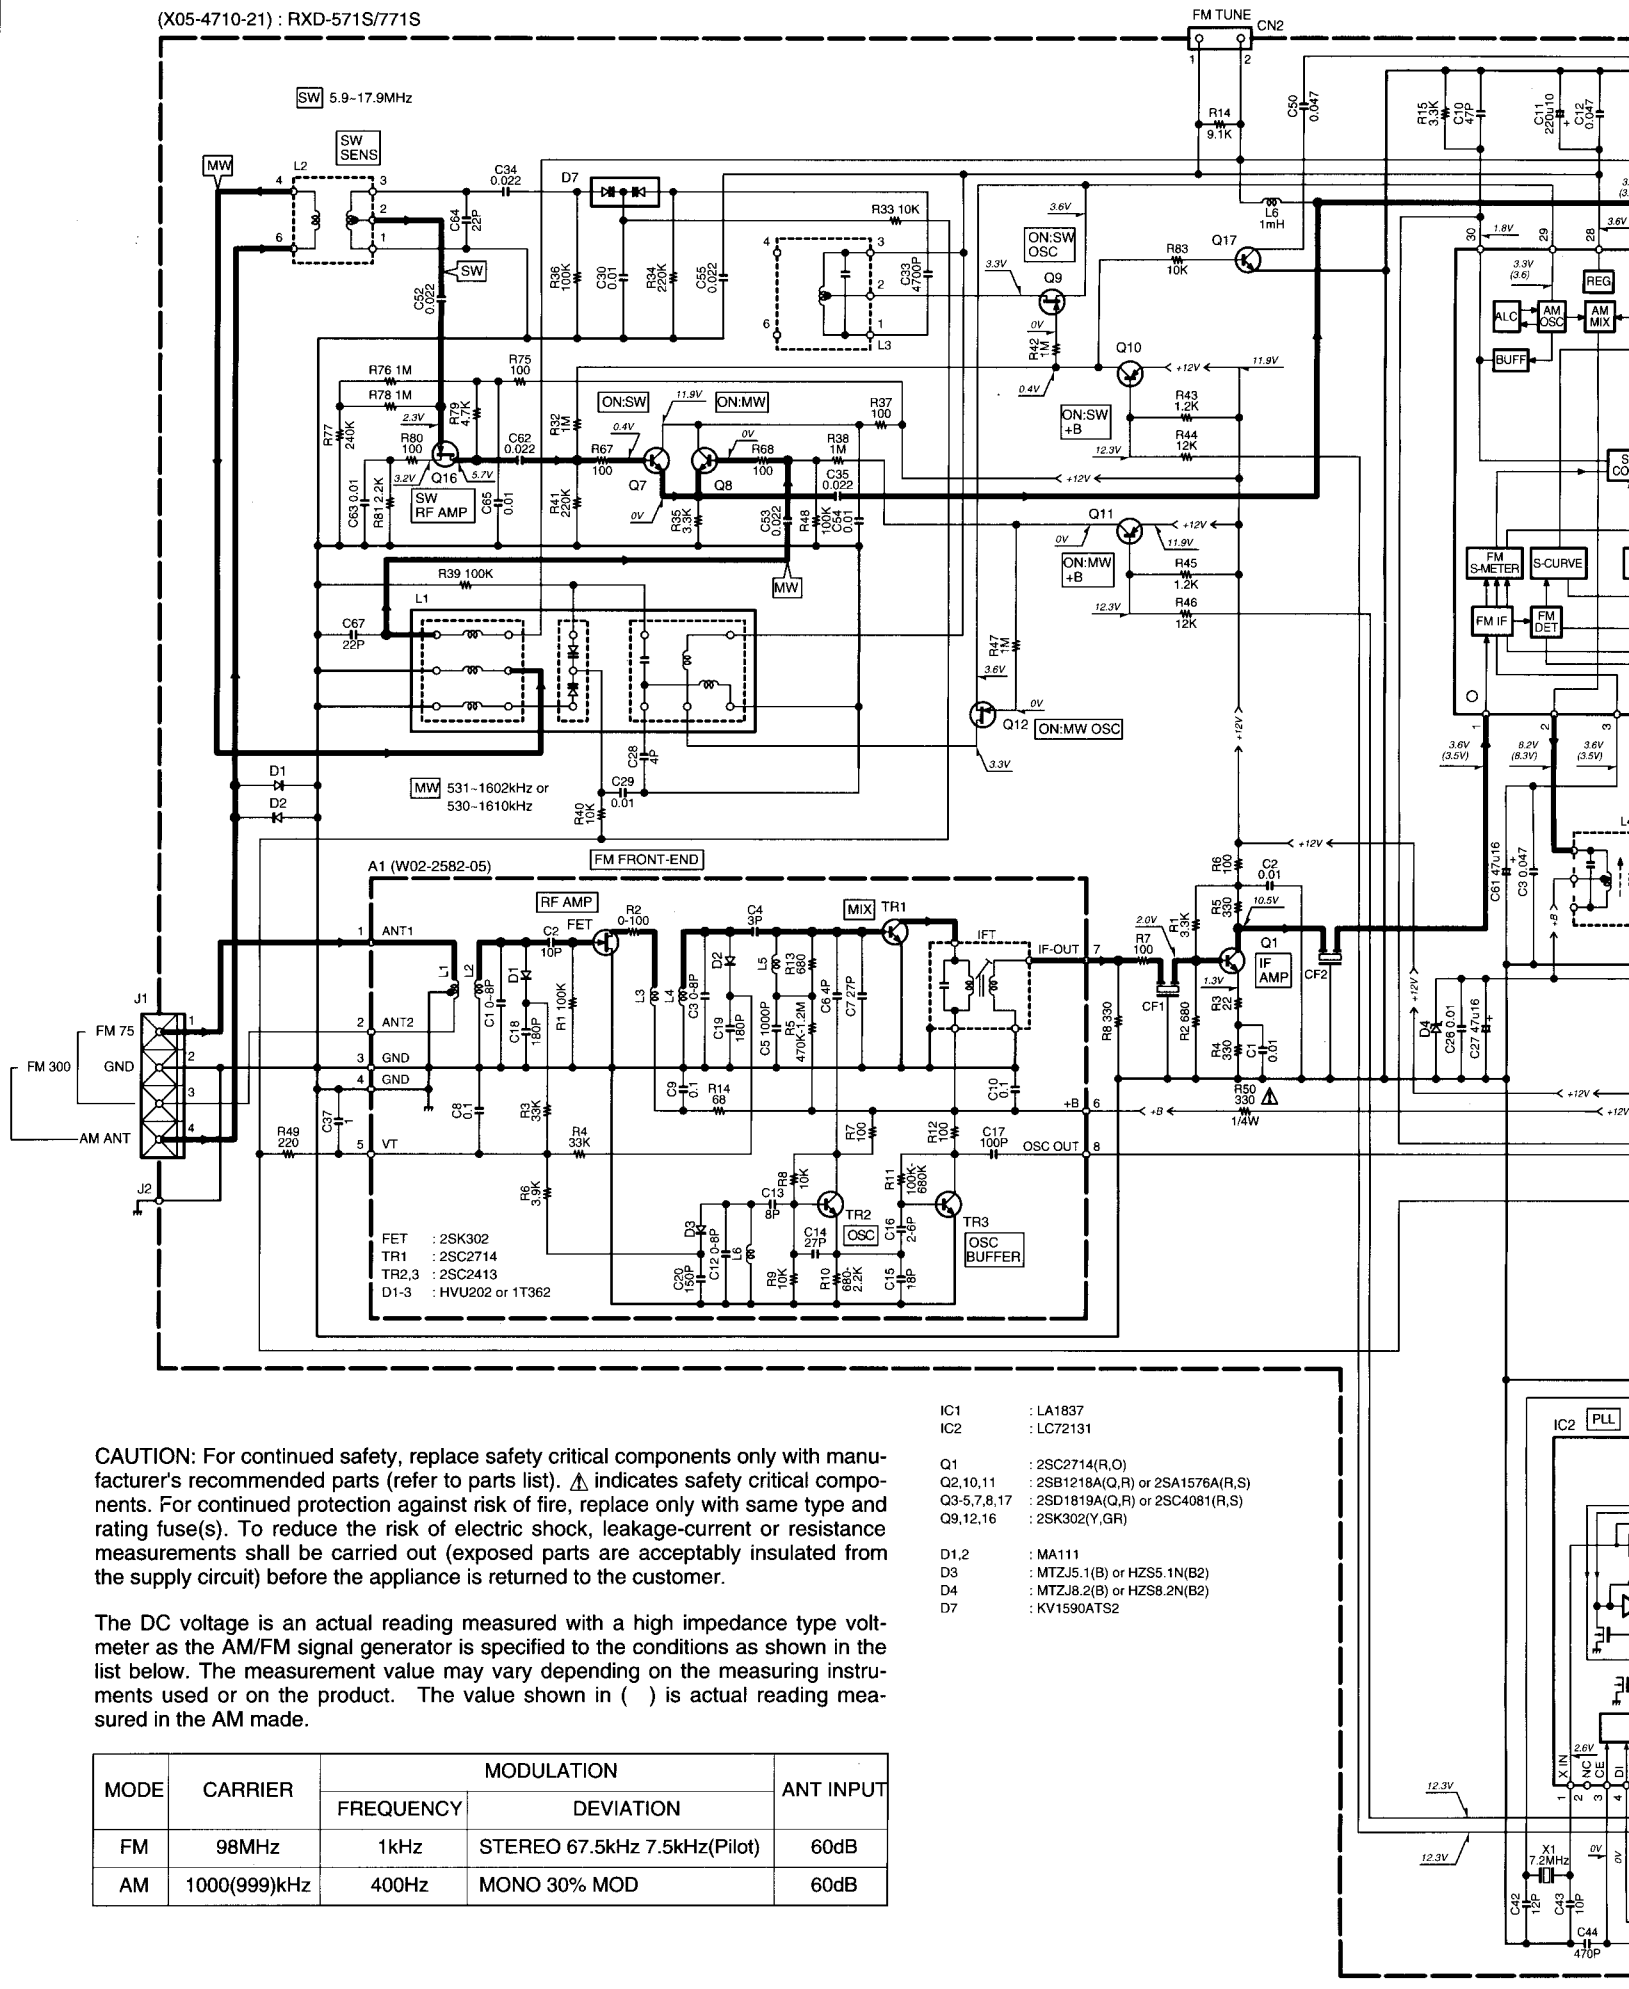

IC1 : LA1837
IC2 : LC72131

Q1 : 2SC2714(R,O)
Q2,10,11 : 2SB1218A(Q,R) or 2SA1576A(R,S)
Q3-5,7,8,17 : 2SD1819A(Q,R) or 2SC4081(R,S)
Q9,12,16 : 2SK302(Y,GR)

D1,2 : MA111
D3 : MTZJ5.1(B) or HZS5.1N(B2)
D4 : MTZJ8.2(B) or HZS8.2N(B2)
D7 : KV1590ATS2

CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). ⚠ indicates safety critical components. For continued protection against risk of fire, replace only with same type and rating fuse(s). To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

The DC voltage is an actual reading measured with a high impedance type voltmeter as the AM/FM signal generator is specified to the conditions as shown in the list below. The measurement value may vary depending on the measuring instruments used or on the product. The value shown in ( ) is actual reading measured in the AM made.

MODE	CARRIER	MODULATION		ANT INPUT
		FREQUENCY	DEVIATION	
FM	98MHz	1kHz	STEREO 67.5kHz 7.5kHz(Pilot)	60dB
AM	1000(999)kHz	400Hz	MONO 30% MOD	60dB

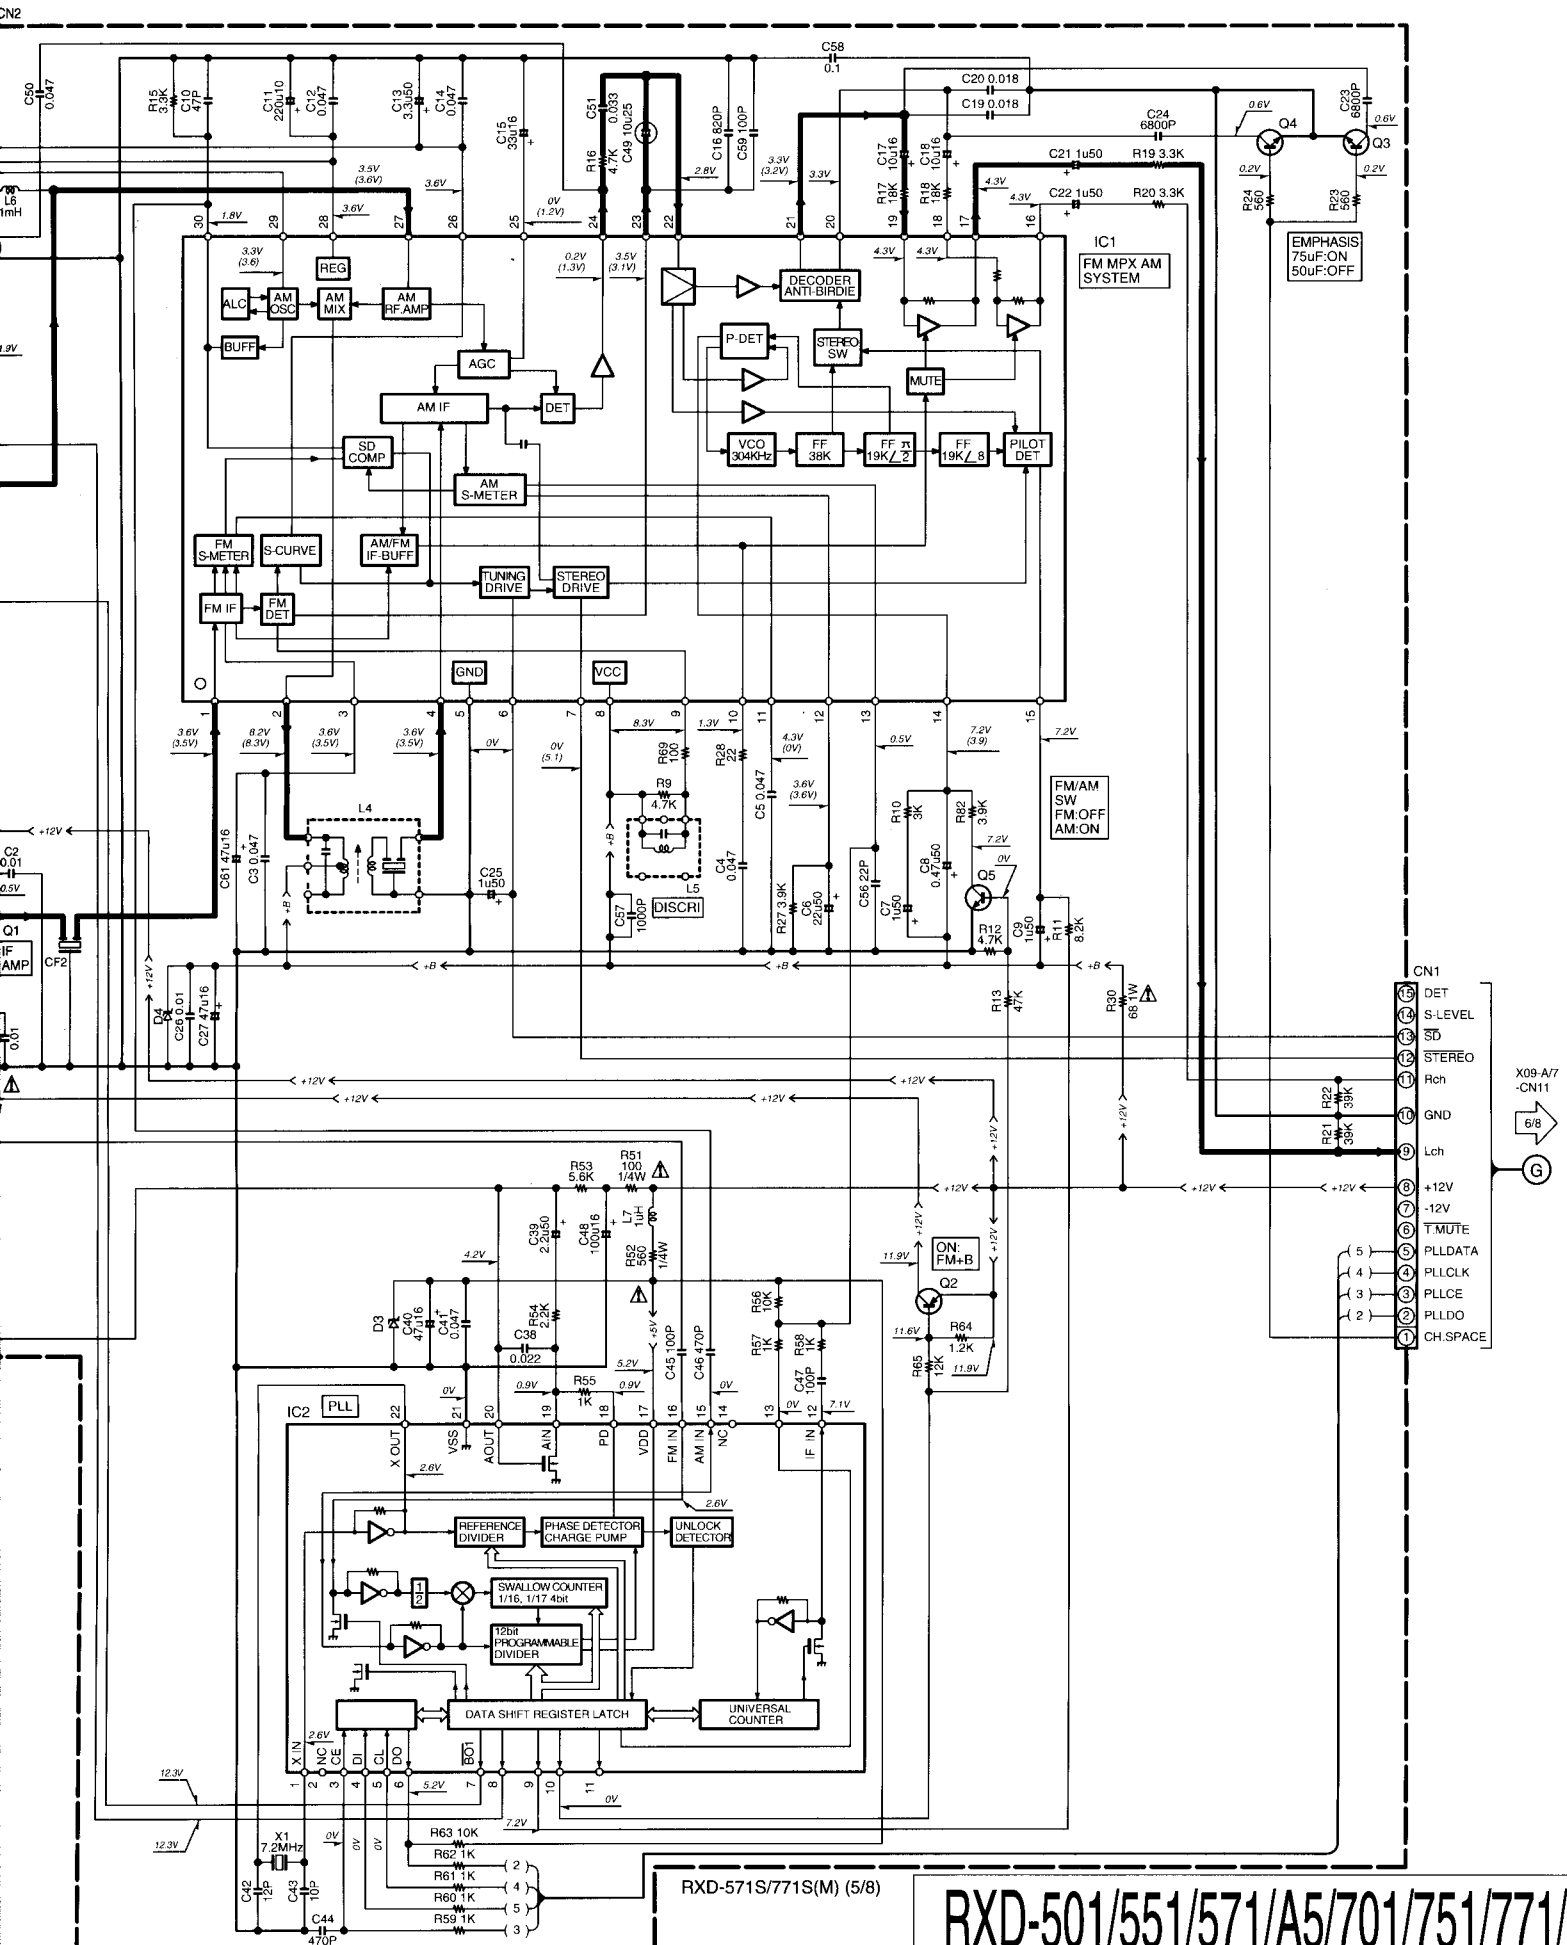

RXD-571S/771S(M) (5/8)

RXD-501/551/571/A5/701/751/771/A8

Y39-2850-10

KENWOOD

AUDIO UNIT
(X09-600X-XX) (A/8) : RXD-A5/RXD-501/RXD-501E/RXD-551E/RXD-501W/RXD-551W/RXD-551/RXD-571S
(X09-494X-XX) (A/8) : RXD-A8/RXD-701/RXD-701E/RXD-751E/RXD-701W/RXD-751W/RXD-751/RXD-771S

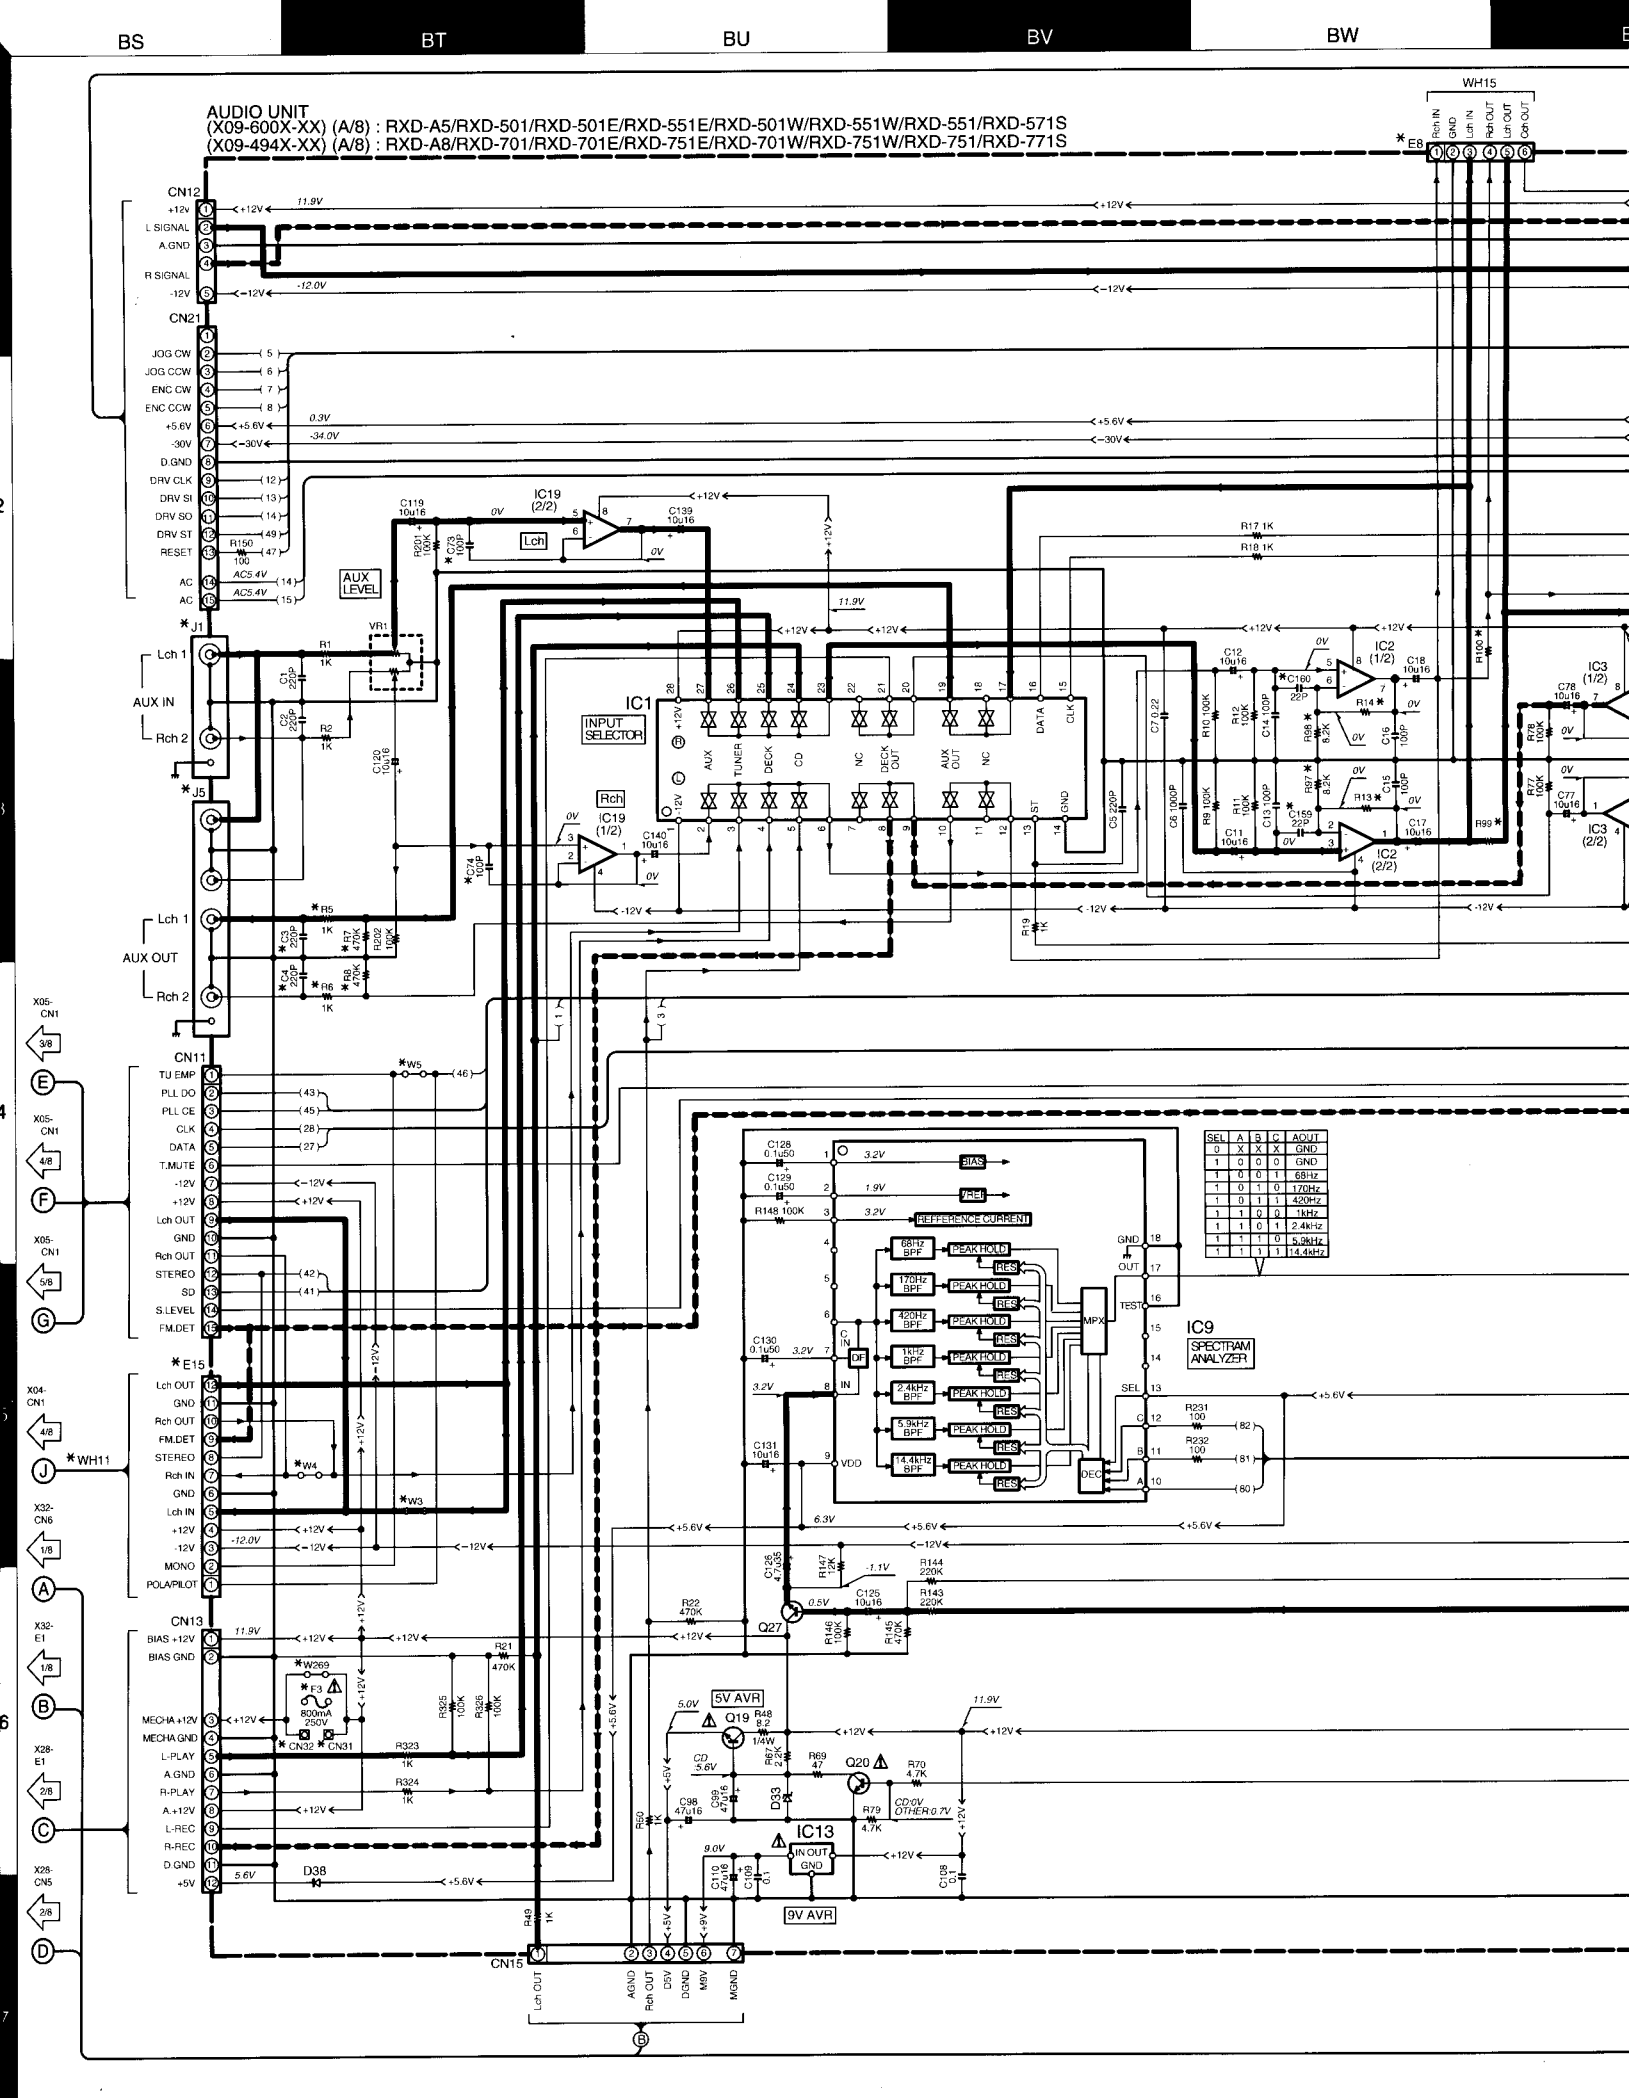

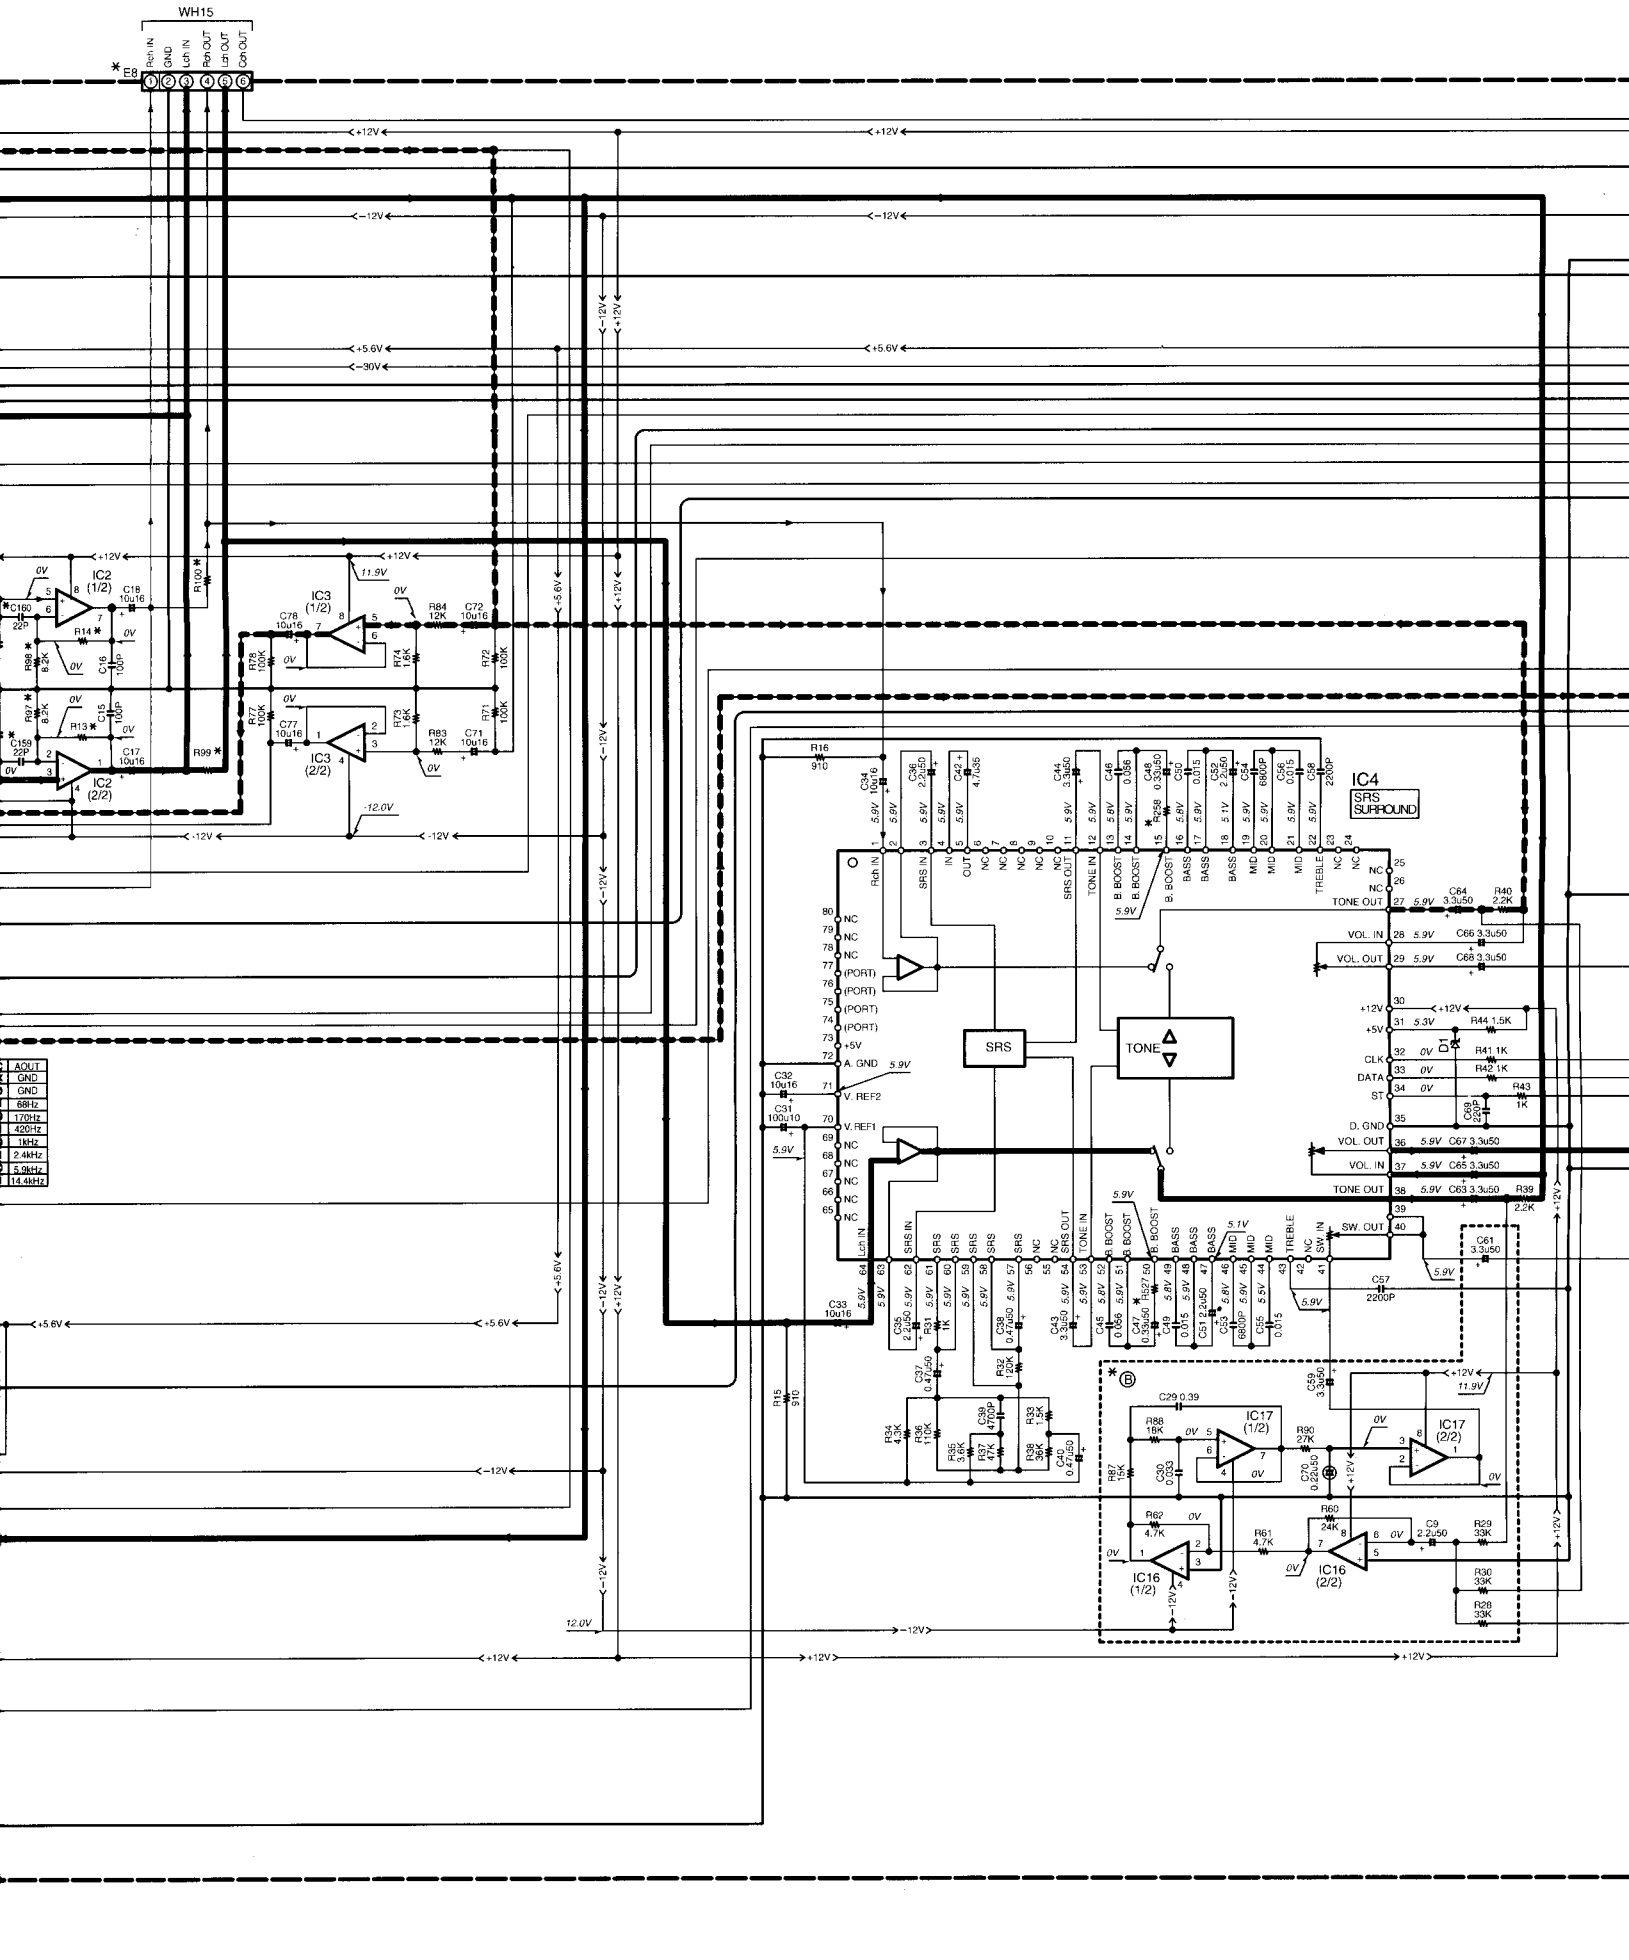
WH15
Rch IN
GND
Lch IN
Rch OUT
Lch OUT
Con OUT
E8
+12V
-12V
+5.6V
-30V
IC2 (1/2)
IC2 (2/2)
IC3 (1/2)
IC3 (2/2)
IC4
SRS SURROUND
SRS
TONE
IC16 (1/2)
IC16 (2/2)
IC17 (1/2)
IC17 (2/2)
TONE OUT
VOL. IN
VOL. OUT
SW. OUT
SW. IN
CLK
DATA
ST
D. GND
A. GND
V. REF1
V. REF2
AOUT
GND
68Hz
170Hz
420Hz
1kHz
2.4kHz
5.9kHz
14.4kHz

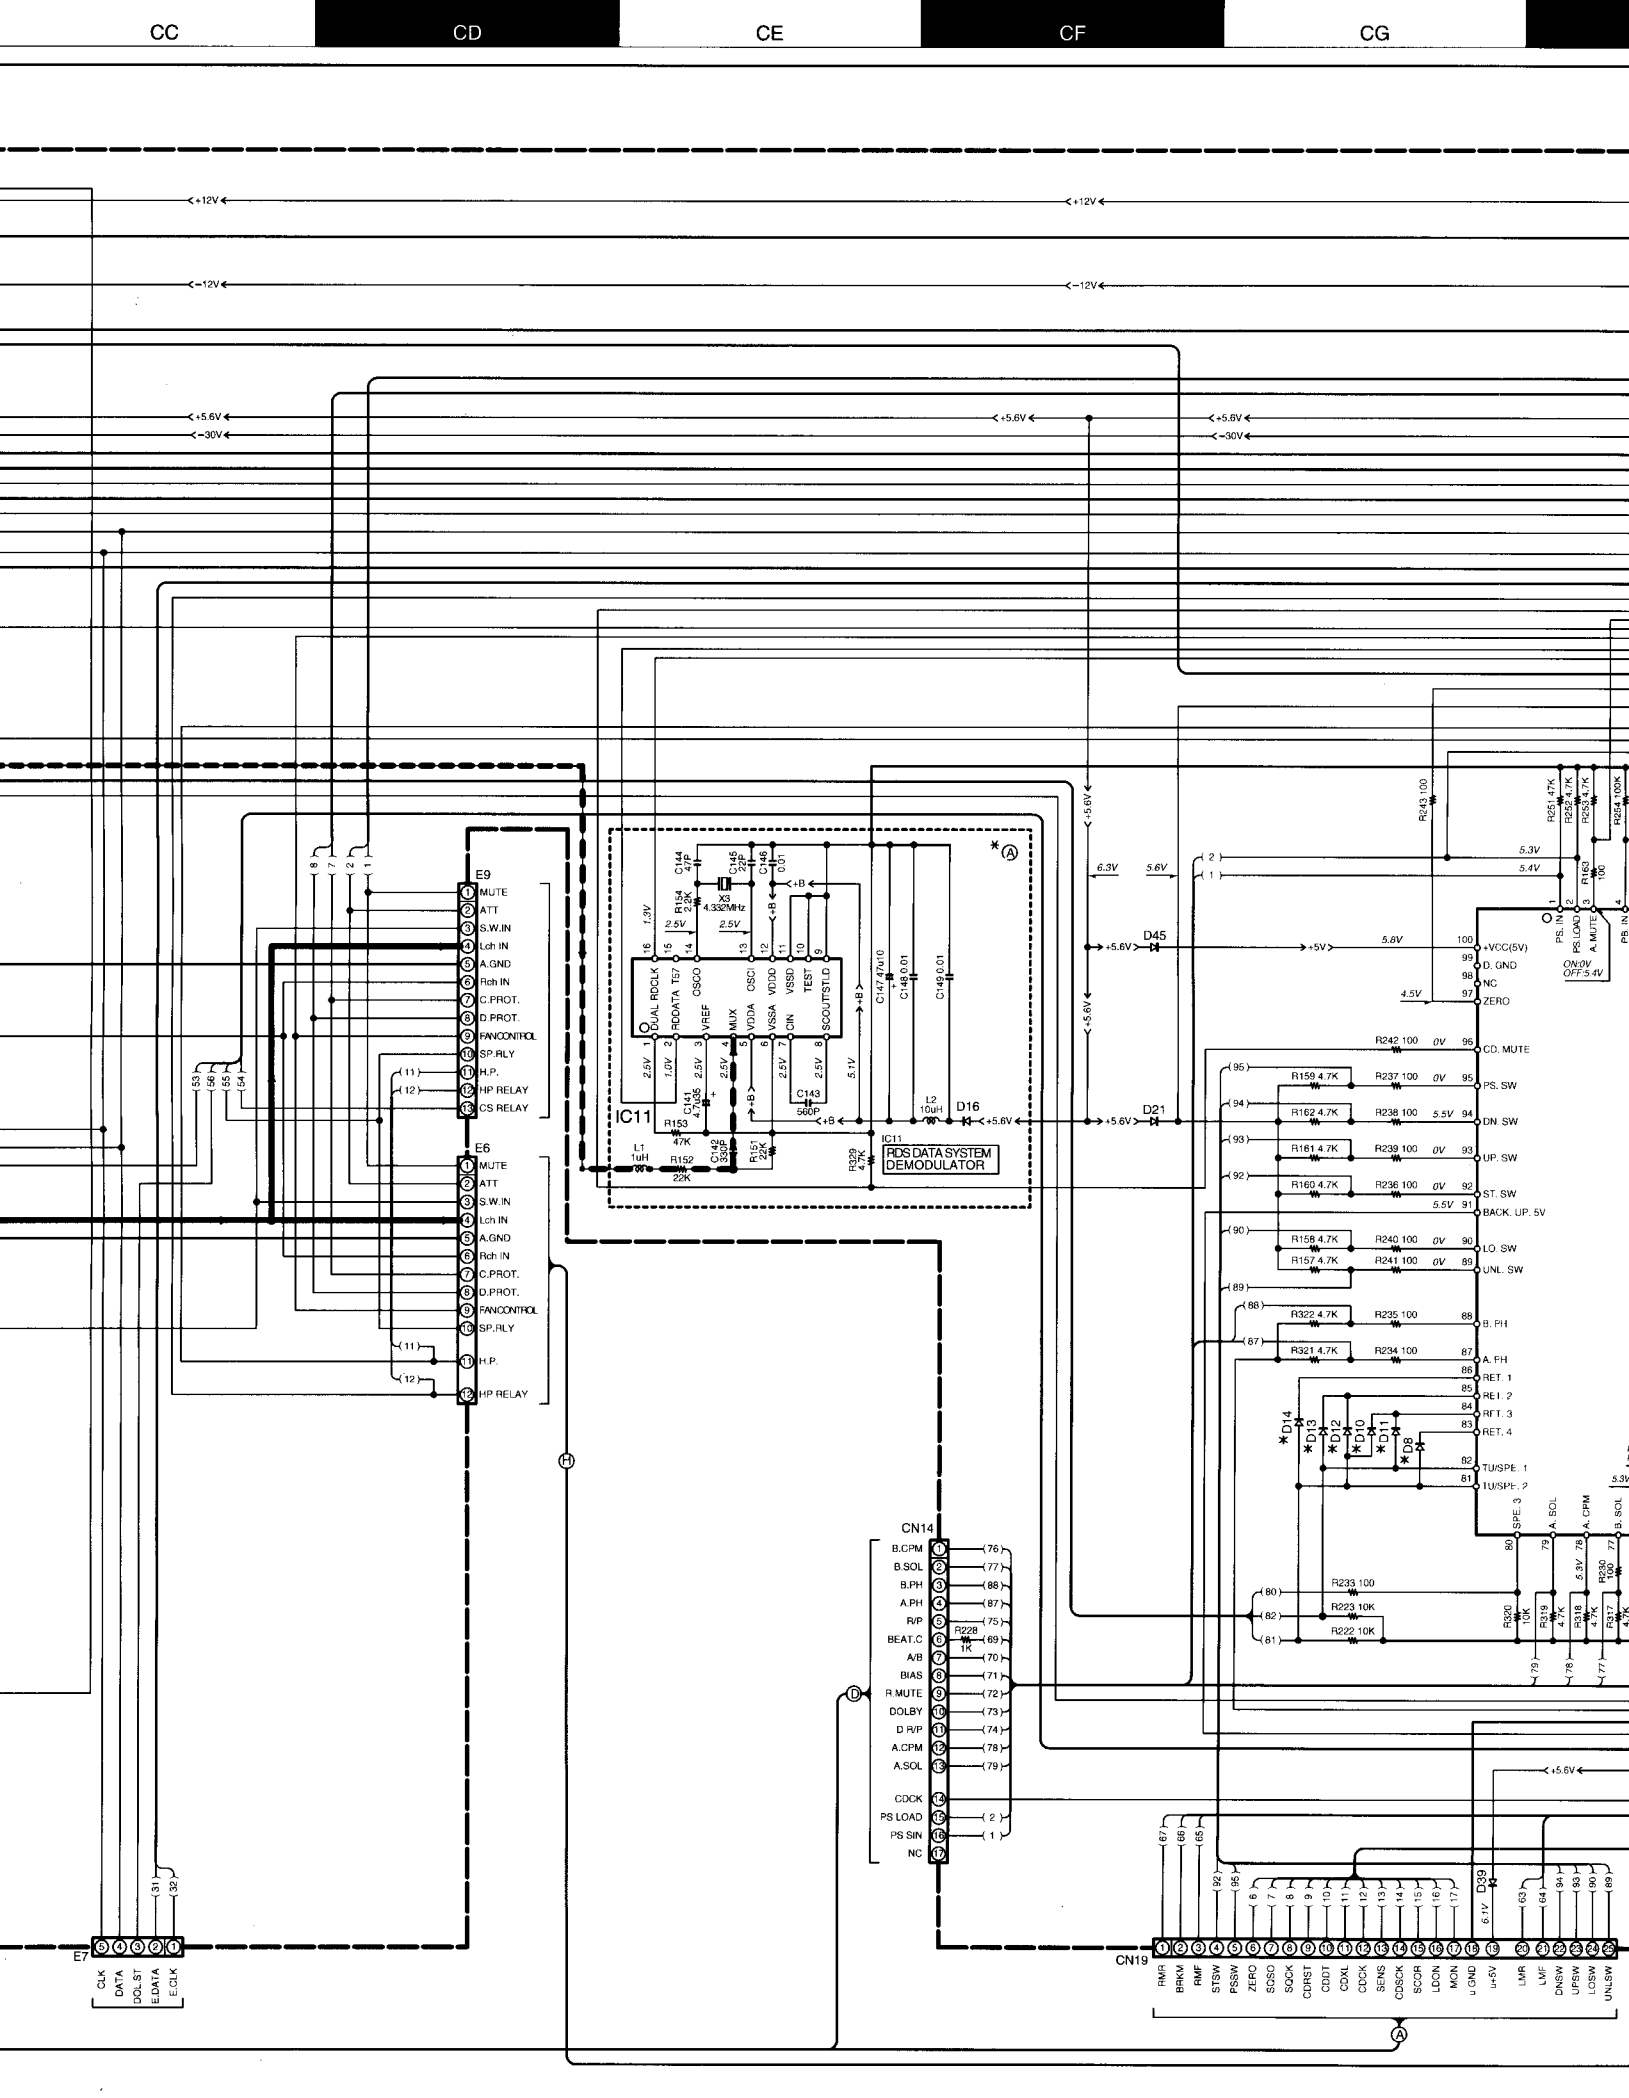
+12V
−12V
+5.6V
−30V
E9
MUTE
ATT
S.W.IN
Lch IN
A.GND
Rch IN
C.PROT.
D.PROT.
FANCONTROL
SP.RLY
H.P.
HP RELAY
CS RELAY
E6
IC11
DUAL RDCLK
RDDATA TEST
OSCO
VREF
MUX
VDDA
VSSA
CIN
OSCI
VDDD
VSSD
TEST
SCOUTTSTLD
X3 4.332MHz
RDS DATA SYSTEM DEMODULATOR
D45
D21
D16
L2 10uH
L1 1uH
+VCC(5V)
D. GND
NC
ZERO
CD. MUTE
PS. SW
DN. SW
UP. SW
ST. SW
BACK. UP. 5V
LO. SW
UNL. SW
B. PH
A. PH
RET. 1
RET. 2
RET. 3
RET. 4
TU/SPE. 1
TU/SPE. 2
PS. IN
PS. LOAD
A. MUTE
PB. IN
CN14
B.CPM
B.SOL
B.PH
A.PH
R/P
BEAT.C
A/B
BIAS
R.MUTE
DOLBY
D.R/P
A.CPM
A.SOL
CDCK
PS LOAD
PS SIN
NC
E7
CLK
DATA
DOLSY
E.DATA
E.CLK
CN19
RMR
BRKM
RMF
STSW
PSSW
ZERO
SOSO
SQCK
CDRST
CDDT
CDXL
CDCK
SENS
CDSCK
SCOR
LDON
MON
u GND
u+5V
LMR
LMF
DNSW
UPSW
LOSW
UNLSW

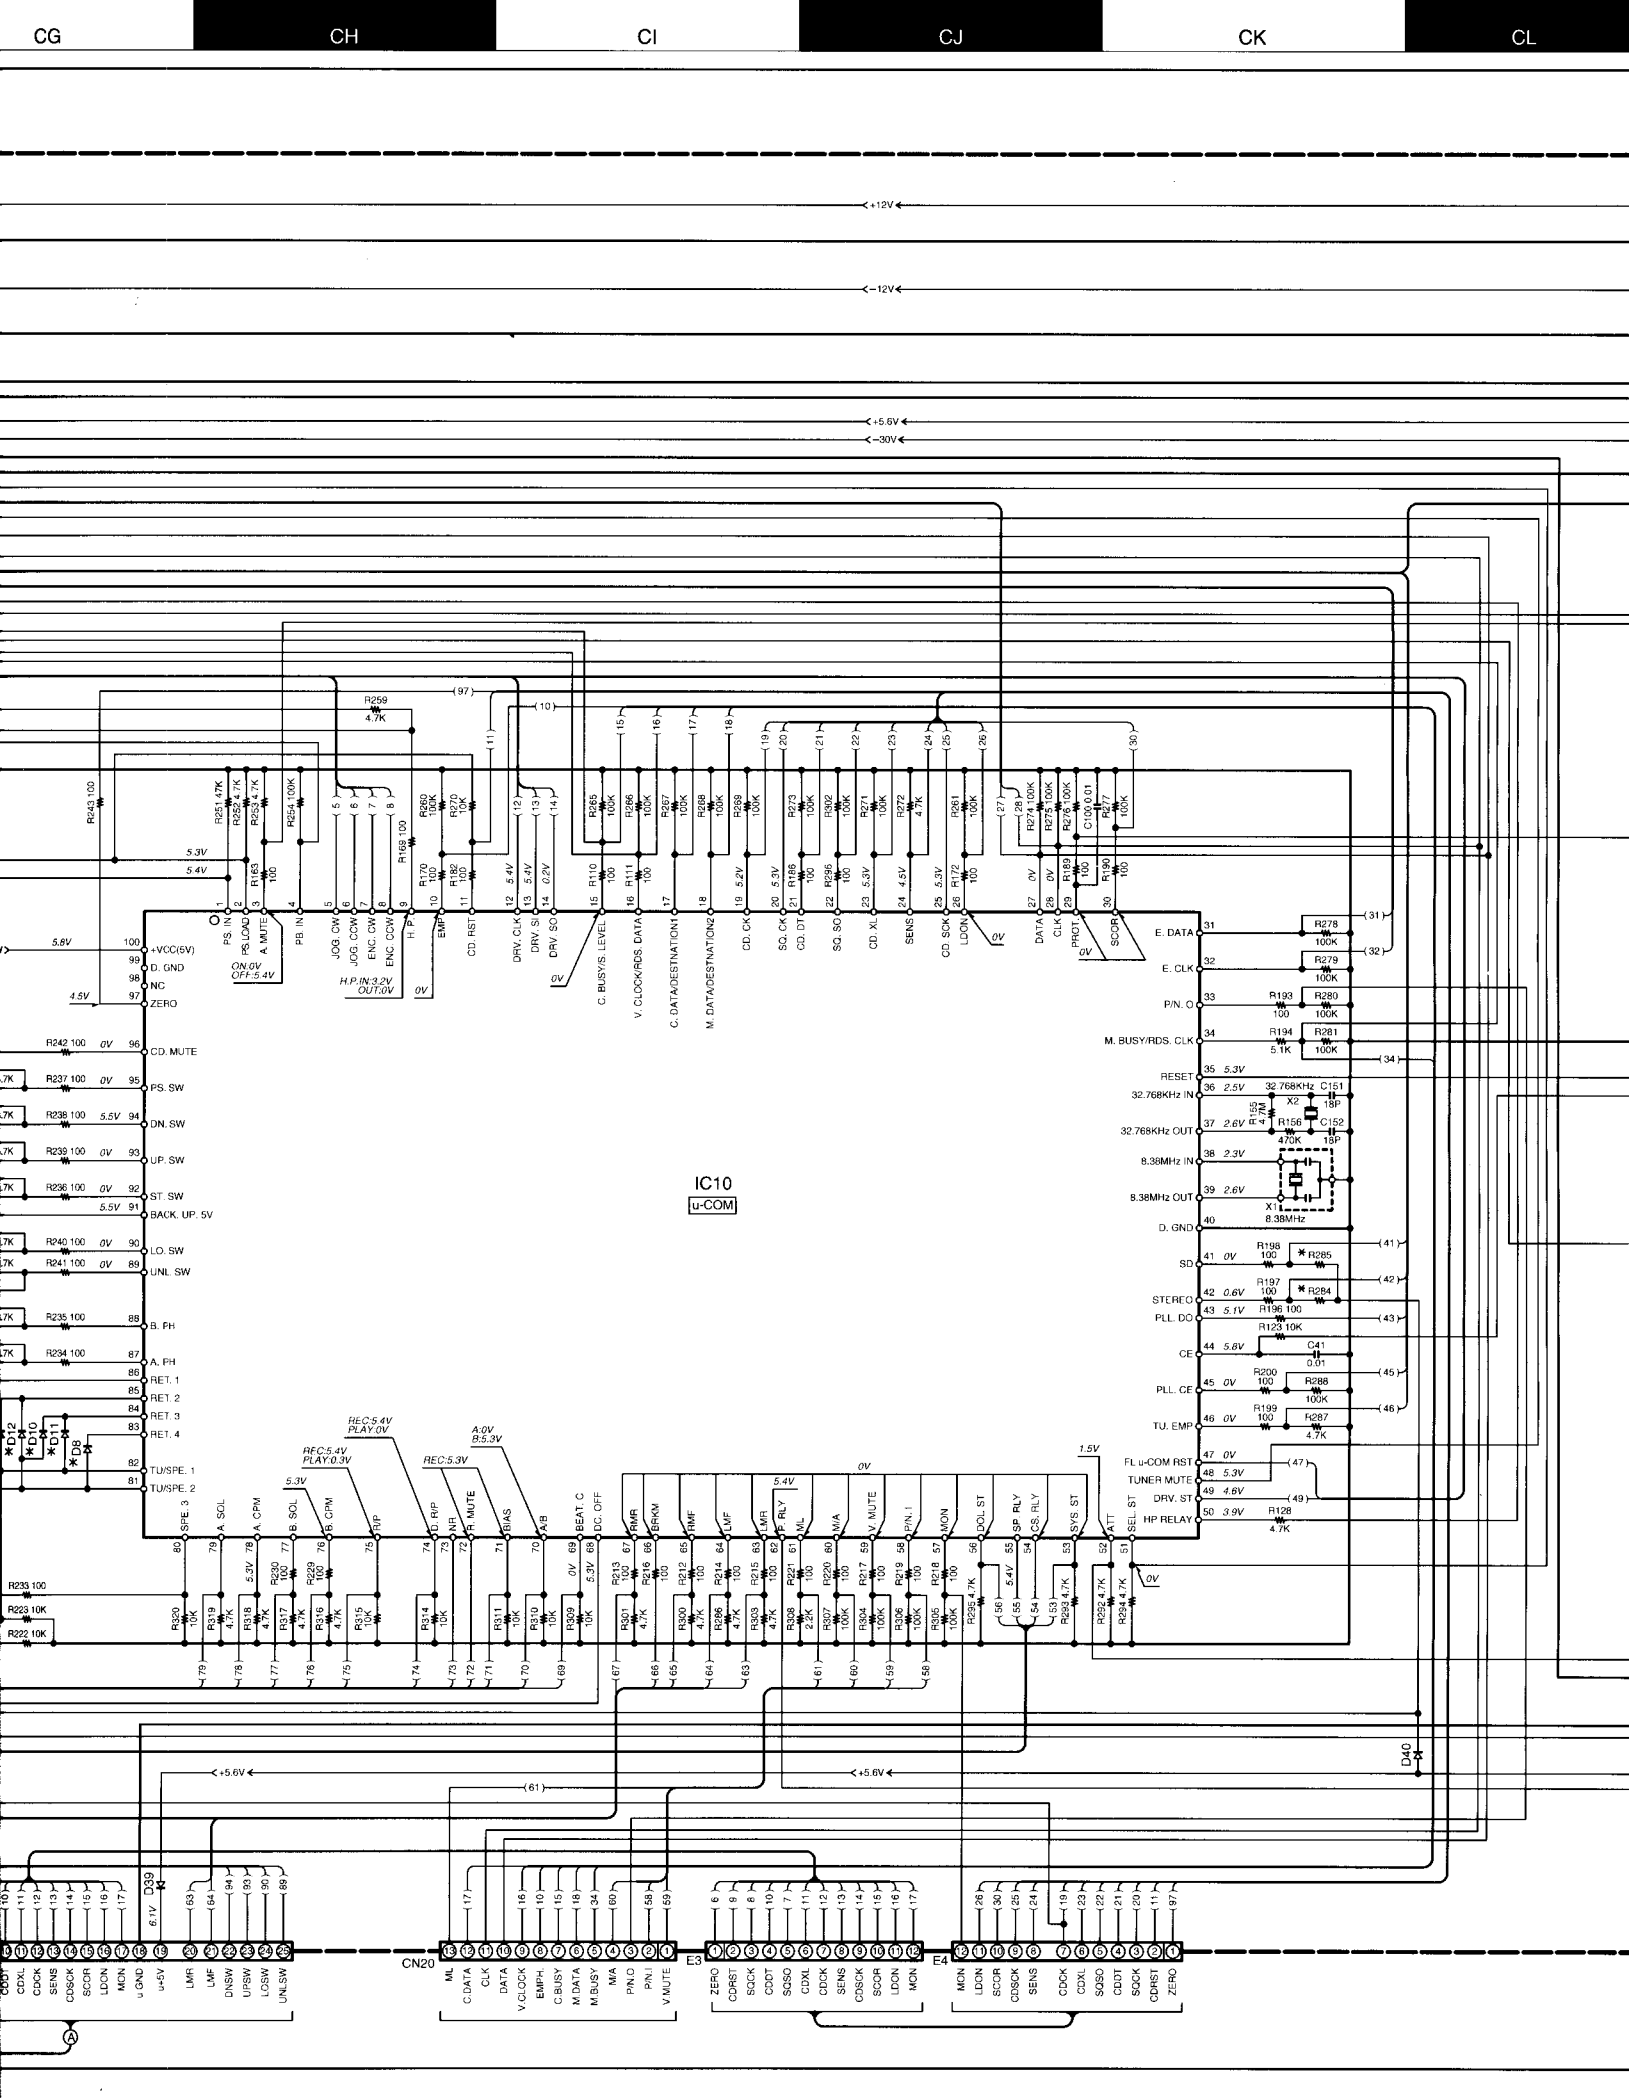
IC10
u-COM
+12V
−12V
+5.6V
−30V
CN20
E3
E4
+VCC(5V)
D. GND
NC
ZERO
CD. MUTE
PS. SW
DN. SW
UP. SW
ST. SW
BACK. UP. 5V
LO. SW
UNL SW
B. FH
A. FH
RET. 1
RET. 2
RET. 3
RET. 4
TU/SPE. 1
TU/SPE. 2
E. DATA
E. CLK
P/N. O
M. BUSY/RDS. CLK
RESET
32.768KHz IN
32.768KHz OUT
8.38MHz IN
8.38MHz OUT
SD
STEREO
PLL. DO
CE
PLL. CE
TU. EMP
FL u-COM RST
TUNER MUTE
DRV. ST
HP RELAY
SEL. ST
ATT
SYS. ST
CS. RLY
SP. RLY
DOL. ST
MON
P/N. I
V. MUTE
M/A
NIL
F. RLY
CMF
CMR
BRKM
RMF
RMR
BEAT. C
DC. OFF
BIAS
A/B
NR
F. MUTE
DT. R/P
CTP
B. CPM
B. SOL
A. CPM
A. SOL
SPE. 3
PS. IN
PS.LOAD
A.MUTE
PB. IN
JOG. CW
JOG. CCW
ENC. CW
ENC. CCW
H. P
EMP
CD. RST
DRV. CLK
DRV. SI
DRV. SO
C. BUSY/S. LEVEL
V. CLOCK/RDS. DATA
C. DATA/DESTNATION
M. DATA/DESTNATION
CD. CK
SQ. CK
CD. DT
SQ. SO
CD. XL
SENS
CD. SCK
LOCK
DATA
CLK
PRGT
SCOR
ON:0V OFF:5.4V
H.P.IN:3.2V OUT:0V
REC:5.4V PLAY:0V
REC:5.4V PLAY:0.3V
REC:5.3V
A:0V B:5.3V
X1 8.38MHz
X2 32.768KHz
D8 D10 D11 D12 D39 D40
CDDT CDXL CDCK SENS CDSCK SCOR LDON MON u GND u+5V LMR LMF DNSW UPSW LOSW UNLSW
ML C.DATA CLK DATA V.CLOCK EMPH. C.BUSY M.DATA M.BUSY M/A P/N.O P/N.I V.MUTE
ZERO CDRST SQCK CDDT SQSO CDXL CDCK SENS CDSCK SCOR LDON MON
MON LDON SCOR CDSCK SENS CDCK CDXL SQSO CDDT SQCK CDRST ZERO

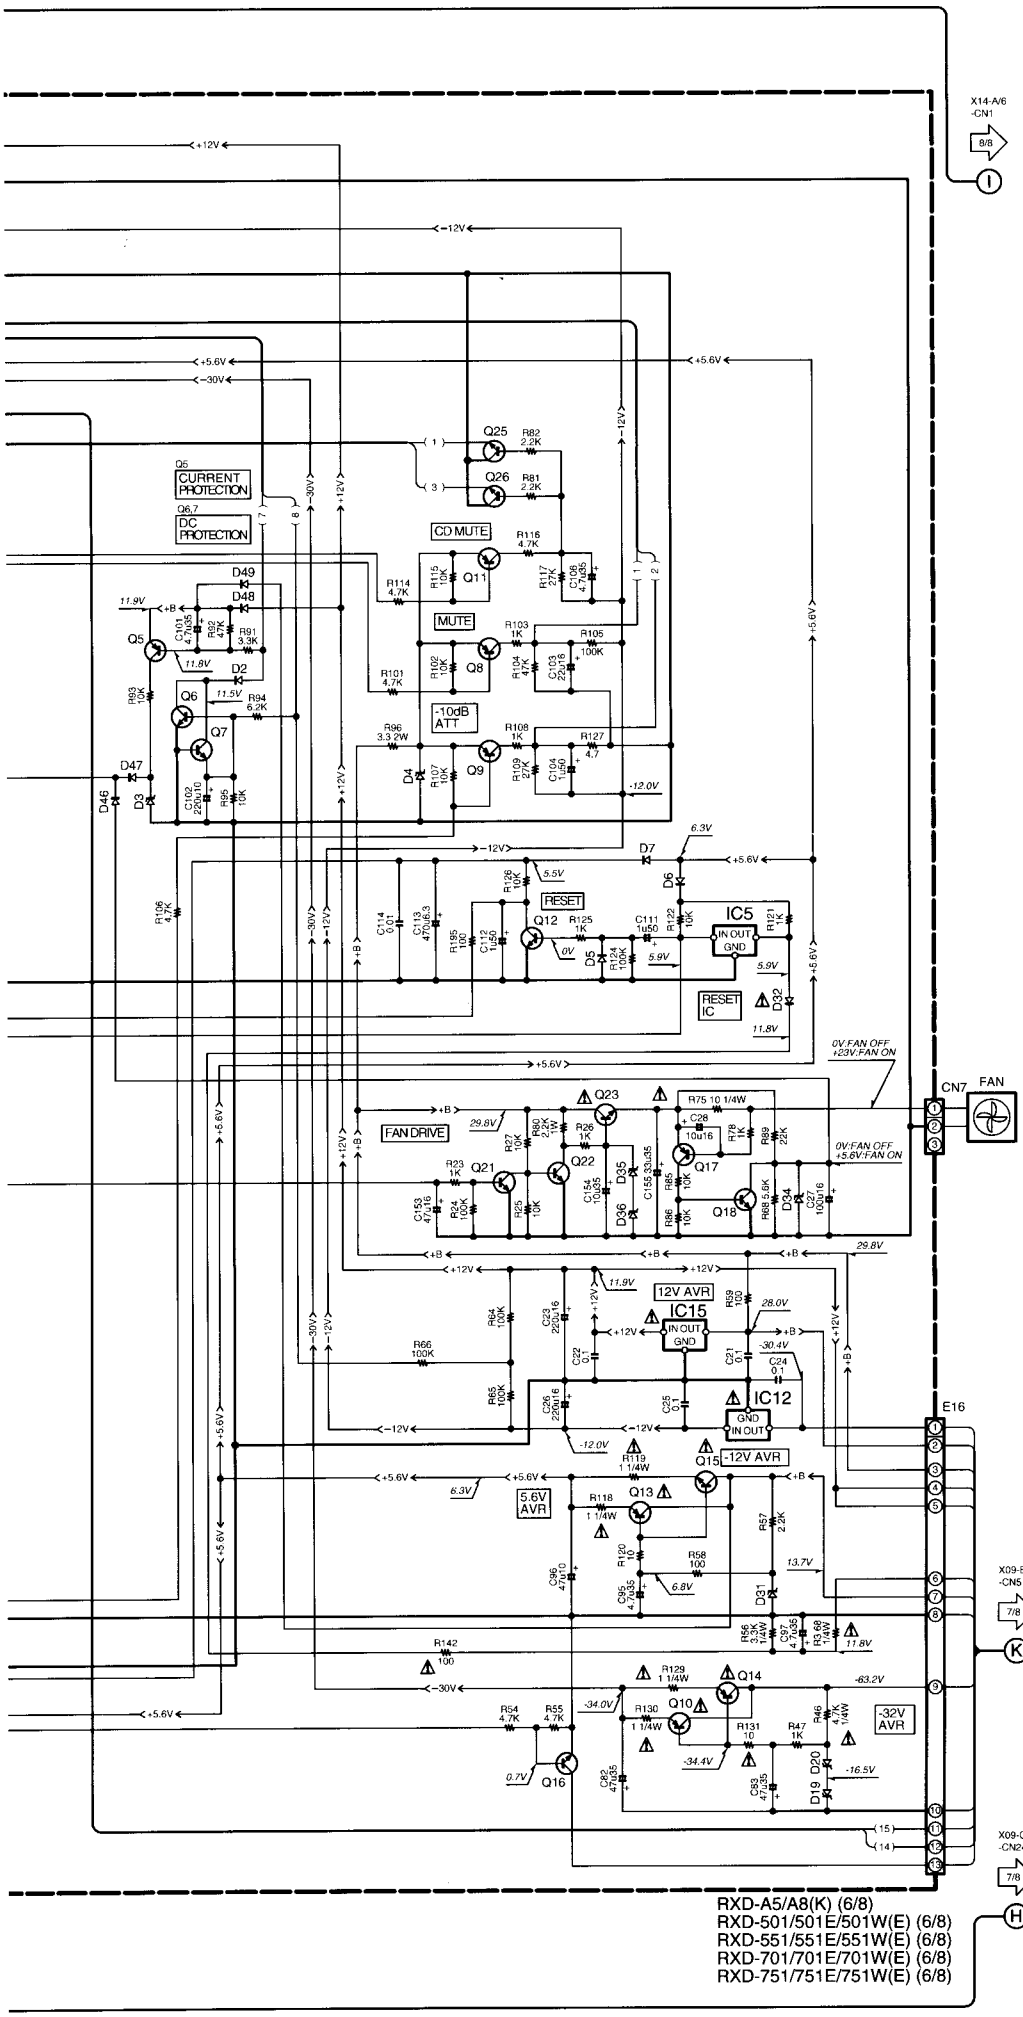

IC1 : NJU7313AL
IC2,3,16,17,19 : NJM4565D-D
IC4 : M62430FP
IC5 : S-806D-Z
IC9 : BA3834SK
IC10 : M38199MF-075FP/M38199MF-078FP
IC11 : SAA6579/R or SAA6579
IC12 : TA79012SB
IC13 : TA7809SB
IC15 : TA78L012AP

Q5 : 2SA992(F,E)
Q6,7 : 2SC1845(F,E)
Q8,9,11 : 2SA933AS(Q,R) or 2SA1175(F,E)
Q12,18,20-22,27 : 2SC1740S(Q,R) or 2SC2785(F,E)
Q10,14 : 2SB1640 or 2SB1417(Q,P)
Q13,15 : 2SD2525 or 2SD2137(Q,P)
Q16 : 2SC2003(L,K)
Q19,23 : 2SD2525 or 2SD2137(Q,P)
Q25,26 : 2SC2878(B)

D1,3,34 : MTZJ5.1(B) or HZS5.1N(B2)
D2,5-8,10,12-14,16,21,32,
38-40,45 : 1SS133 or HSS104A
D4 : MTZJ3.9(B) or HZS3.9N(B2)
D19 : MTZJ16(B) or HZS16N(B2)
D20 : MTZJ18(B) or HZS18N(B2)
D31 : MTZJ6.2(B) or HZS6.2N(B2)
D33,35 : MTZJ5.6(B) or HZS5.6N(B2)
D36 : MTZJ20(B) or HZS20N(B2)

RXD-A5 (X09-6000-11)

DESTINATION		UNIT No.	Ⓐ	Ⓑ	R5-8	R284, 285	R527, 528	C3,4,73,74, 159,160	W3,4, 269	W5	WH11	CN31, 32	E15	J1
COUNTRY	ABB													
U.S.A	K	0-11	NO	NO	4.7K	560	NO		YES	NO	NO	YES	NO	YES
CANADA	P													

RXD-501 (X09-600X-XX)

DESTINATION		UNIT No.	Ⓐ	Ⓑ	R5-8	R284, 285	R527, 528	C3,4	C73,74, 159,160	W3,4, 269	W5	WH11	CN31, 32	E15
COUNTRY	ABB													
EUROPE	E	2-71	YES	NO	YES	4.7K	560	YES	YES	YES	NO	NO	NO	NO
U.K.	T	0-51												
AUSTRALIA	X	0-71	NO						NO					
JAPAN	J	0-00												

RXD-501E/551E (X09-6002-71)

DESTINATION		UNIT No.	Ⓐ	Ⓑ	R5-8	R284, 285	R527, 528	C3,4,73,74, 159,160	W3,4, 269	W5	WH11	CN31, 32	E15
COUNTRY	ABB												
EUROPE	E2	2-71	YES	NO	YES	4.7K	560	YES	YES	NO	NO	NO	NO

RXD-501W/551W (X09-6003-81)

DESTINATION		UNIT No.	Ⓐ	Ⓑ	R5-8	R284, 285	R527, 528	C3,4,73,74, 159,160	W269	W3-5	WH11	CN31, 32	E15
COUNTRY	ABB												
RUSSIA	Q	3-81	YES	NO	YES	4.7K	560	YES	YES	NO	YES	NO	YES

RXD-551 (X09-600X-XX)

DESTINATION		UNIT No.	Ⓐ	Ⓑ	R5-8	R284, 285	R527, 528	C3,4	C73,74, 159,160	W3,4, 269	W5	WH11	CN31, 32	E15
COUNTRY	ABB													
EUROPE	E	2-71	YES	NO	YES	4.7K	560	YES	YES	YES	NO	NO	NO	NO
U.K.	T	0-51												
AUSTRALIA	X	0-71												
JAPAN	J	0-00							NO					
PX	Y	0-21	NO			47K					YES			
GENERAL MARKET	M													

RXD-571S (X09-6000-22)

DESTINATION		UNIT No	Ⓐ	Ⓑ	R5-8	R284, 285	R527, 528	C3,4	C73,74, 159,160	W3-5, 269	WH11	CN31, 32	E15	J1
COUNTRY	ABB													
GENERAL MARKET	M	0-22	NO		YES	47K	560	YES	NO	YES	NO	NO	NO	NO

RXD-A8 (X09-4940-10)

DESTINATION		UNIT No.	Ⓐ	Ⓑ	R5-8	R284, 285	R527, 528	C3,4,73,74, 159,160	W3,4	W5, 269	WH11	CN31, 32	E15	J1
COUNTRY	ABB													
U.S.A	K	0-10	NO	YES	NO	4.7K	10K	NO	YES	NO	NO	YES	NO	YES
CANADA	P													

RXD-701 (X09-494X-XX)

DESTINATION		UNIT No.	Ⓐ	Ⓑ	R5-8	R284, 285	R527, 528	C3,4	C73,74, 159,160	W3,4, 269	W5	WH11	CN31, 32	E1
COUNTRY	ABB													
EUROPE	E	2-71	YES	YES	YES	4.7K	10K	YES	YES	YES	NO	NO	NO	N
U.K.	T	0-51												
AUSTRALIA	X	0-71	NO						NO					

RXD-701E/751E (X09-4942-71)

DESTINATION		UNIT No.	Ⓐ	Ⓑ	R5-8	R284, 285	R527, 528	C3,4,73,74, 159,160	W3,4, 269	W5	WH11	CN31, 32	E15	J1
COUNTRY	ABB													
EUROPE	E2	2-71	YES	YES	YES	4.7K	10K	YES	YES	NO	NO	NO	NO	NO

RXD-701W/751W (X09-4943-81)

DESTINATION		UNIT No.	Ⓐ	Ⓑ	R5-8	R284, 285	R527, 528	C3,4,73,74, 159,160	W269	W3-5	WH11	CN31, 32	E15
COUNTRY	ABB												
RUSSIA	Q	3-81	YES	YES	YES	4.7K	10K	YES	YES	NO	YES	NO	YES

RXD-751 (X09-494X-XX)

DESTINATION		UNIT No.	Ⓐ	Ⓑ	R5-8	R284, 285	R527, 528	C3,4	C73,74, 159,160	W3,4, 269	W5	WH11	CN31, 32	E1
COUNTRY	ABB													
EUROPE	E	2-71	YES			4.7K			YES		NO			
U.K.	T	0-51		YES	YES		10K	YES		YES		NO	NO	NO
AUSTRALIA	X	0-71	NO						NO					
PX	Y	0-21				47K					YES			
GENERAL MARKET	M													

RXD-771S (X09-4940-22)

DESTINATION		UNIT No.	Ⓐ	Ⓑ	R5-8	R284, 285	R527, 528	C3,4	C73,74, 159,160	W3-5, 269	WH11	CN31, 32	E15	J1
COUNTRY	ABB													
GENERAL MARKET	M	0-22	NO	YES	YES	47K	10K	YES	NO	YES	NO	NO	NO	NO

3AL
5D-D
FP
Z
SK
MF-075FP/M38199MF-078FP
9/R or SAA6579
2SB
SB
12AP

(F,E)
5(F,E)
AS(Q,R) or 2SA1175(F,E)
0S(Q,R) or 2SC2785(F,E)
0 or 2SB1417(Q,P)
5 or 2SD2137(Q,P)
3(L,K)
5 or 2SD2137(Q,P)
8(B)

1(B) or HZS5.1N(B2)

or HSS104A
9(B) or HZS3.9N(B2)
(B) or HZS16N(B2)
(B) or HZS18N(B2)
2(B) or HZS6.2N(B2)
6(B) or HZS5.6N(B2)
(B) or HZS20N(B2)

	R5-8	R284, 285	R527, 528	C3,4,73,74, 159,160	W3, 4	W5, 269	W11	CN31, 32	E15	J1	J5	F3	D8,10, 12-14	D11	R13,14	R97,98	R99,100
	NO	NO	4.7K	560	NO	YES	NO	NO	YES	NO	YES	NO	YES	NO	YES	100	NO	750

	R5-8	R284, 285	R527, 528	C3,4	C73,74, 159,160	W3,4, 269	W5	W11	CN31, 32	E15	J1	J5	F3	D8, 13	D10	D11, 12,14	R13,14	R97,98	R99,100
ES	NO	YES	4.7K	560	YES	YES	NO	NO	NO	NO	NO	YES	NO	NO	YES / NO	YES	10 K	8.2 K	1 K
O																			

(1)

	R5-8	R284, 285	R527, 528	C3,4,73,74, 159,160	W3,4, 269	W5	WH11	CN31, 32	E15	J1	J5	F3	D8, 13	D10,11, 12,14	R13,14	R97,98	R99,100		
ES	NO	YES	4.7K	560	YES	YES	NO	NO	NO	NO	NO	YES	NO	NO	YES	10 K	8.2 K	1 K	

(81)

	R5-8	R284, 285	R527, 528	C3,4,73,74, 159,160	W269	W3-5	WH11	CN31, 32	E15	J1	J5	F3	D8, 13	D10,11, 12,14	R13,14	R97,98	R99,100		
ES	NO	YES	4.7K	560	YES	YES	NO	YES	NO	YES	NO	YES	NO	NO	YES	10 K	8.2 K	1 K	

	R5-8	R284, 285	R527, 528	C3,4	C73,74, 159,160	W3,4, 269	W5	WH11	CN31, 32	E15	J1	J5	F3	D8, 13	D10	D11, 12,14	R13,14	R97,98	R99,100
ES	NO	YES	4.7K / 47K	560	YES	YES / NO	NO / YES	NO	NO	NO	NO	YES	NO	NO	YES / NO	YES	10 K	8.2 K	1 K

	R5-8	R284, 285	R527, 528	C3,4	C73,74, 159,160	W3-5, 269	WH11	CN31, 32	E15	J1	J5	F3	D8,11, 12,14	D10, 13	R13,14	R97,98	R99,100		
NO	YES	47K	560	YES	NO	YES	NO	NO	NO	NO	YES	NO	YES	NO	10 K	8.2 K	1 K		

	R5-8	R284, 285	R527, 528	C3,4,73,74, 159,160	W3,4	W5, 269	WH11	CN31, 32	E15	J1	J5	F3	D8,10, 11,12,14	D13	R13,14	R97,98	R99,100		
O	YES	NO	4.7K	10K	NO	YES	NO	NO	YES	NO	YES	NO	YES	NO	YES	100	NO	750	

	R5-8	R284, 285	R527, 528	C3,4	C73,74, 159,160	W3,4, 269	W5	WH11	CN31, 32	E15	J1	J5	F3	D8, 11	D10	D12-14	R13,14	R97,98	R99,100
ES	YES	YES	4.7K	10K	YES	YES / NO	YES	NO	NO	NO	NO	NO	YES	NO	NO	YES / NO	YES	10 K	8.2 K	1 K
O																			

(1)

	R5-8	R284, 285	R527, 528	C3,4,73,74, 159,160	W3,4, 269	W5	WH11	CN31, 32	E15	J1	J5	F3	D8, 11	D10, 12-14	R13,14	R97,98	R99,100		
	YES	YES	4.7K	10K	YES	YES	NO	NO	NO	NO	NO	YES	NO	NO	YES	10 K	8.2 K	1 K	

(81)

	R5-8	R284, 285	R527, 528	C3,4,73,74, 159,160	W269	W3-5	WH11	CN31, 32	E15	J1	J5	F3	D8, 11	D10, 12-14	R13,14	R97,98	R99,100		
YES	YES	YES	4.7K	10K	YES	YES	NO	YES	NO	YES	NO	YES	NO	NO	YES	10 K	8.2 K	1 K	

	R5-8	R284, 285	R527, 528	C3,4	C73,74, 159,160	W3,4, 269	W5	WH11	CN31, 32	E15	J1	J5	F3	D8, 11	D10	D12-14	R13,14	R97,98	R99,100
ES	YES	YES	4.7K / 47K	10K	YES	YES	NO / YES	NO	NO	NO	NO	YES	NO	NO	YES / NO	YES	10 K	8.2 K	1 K

	R5-8	R284, 285	R527, 528	C3,4	C73,74, 159,160	W3-5, 269	WH11	CN31, 32	E15	J1	J5	F3	D8, 12-14	D10, 11	R13,14	R97,98	R99,100		
O	YES	YES	47K	10K	YES	NO	YES	NO	NO	NO	NO	YES	NO	YES	NO	10 K	8.2 K	1 K	

BA10393



2SA954
2SA992
2SB764
2SC1845
2SC2003
2SC2878
2SC3246



2SB1624



2SA1175
2SC2785



LA1836



DTA124ESA
DTC124ESA
UN4112
2SC1740S



2SB1218A
2SC2714
2SC4081
2SD1819A
2SD2114K



UN4212



IR3R42



NJM4565D
NJM4565D-D



TC4052BP
TC74HC166AP



TA8409S



SAA6579/R



SAA6579



BA3126N



NJM2904M



TA78L012AP



2SK302



CXA1571M



LC72131



M62430FP



LA1832



NJU7313AL



CXD2587Q



HA12209F



LA1837



BA5979S



CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). ⚠ indicates safety critical components. For continued protection against risk of fire, replace only with same type and rating fuse(s). To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

The DC voltage is an actual reading measured with a high impedance type voltmeter. The measurement value may vary depending on the measuring instruments used or on the product. Refer to the voltage dur ing PLAY unless otherwise specified; The value shown in ( ) is the voltage measured at the moment of STOP.

X09-A/7
-E16
6/8
K

IC21 PIN VOLTAGE

MODELS	1	2	3	4	5	6	7	8	9-11	12-15	16	17	18,19	20	21,22	23,24	25	26
RXD-A5 RXD-501/551	54.3V	0V	54.3V	0V	0V	0V	0V	-54.8V	-54.8V	0V	-53.0V	53.0V	0V	-51.8V	0V	N/C	N/C	N/C
RXD-A8 RXD-701/751	64.3V	0V	29.6V	29.8V	22.4V	-22.8V	-30.8V	-64.3V	-30.6V	0V	-60.7V	60.5V	0V	-59.4V	0V	0V	-30.6V	0V

MODELS	Ⓐ	Ⓑ	Ⓒ	Ⓓ
RXD-A5 RXD-501/551	26.0V	-27.0V	55.0V	-55.0V
RXD-A8 RXD-701/751	29.8V	-30.4V	64.3V	-64.3V

(X09-600X-XX) (C/8) : RXD-A5/RXD-501/RXD-501E/RXD-551E/RXD-501W/RXD-551W/RXD-551/RXD-571S
(X09-494X-XX) (C/8) : RXD-A8/RXD-701/RXD-701E/RXD-751E/RXD-701W/RXD-751W/RXD-751/RXD-771S

POWER IC
* IC21 ⚠

3 OUT -V 3 IN 3 NF 2 IN 2 NF MUTE 1 NF 1 IN +V(PRE) -V(PRE) 2 OUT 1 OUT NC SUB GND -V -V -VOUT -VH -VL -ZD -ZD +VL +VOUT GND +VH
26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1

STK401-030K
STK407-710K

WH9 CN24
MUTE ① ATT ② S.W. IN ③ Lch IN ④ A GND ⑤ Rch IN ⑥ CURRENT PROTECTION ⑦ DC PROTECTION ⑧ FAN CONTROL ⑨ SP.RLY ⑩ H.P. ⑪ HP RELAY ⑫

X09-A/7
-E6
6/8
H

Q501-503 ATT
Q505-507 MUTE

12.1V

22	23,24	25	26
	N/C	N/C	N/C
	0V	-30.6V	0V

MODELS	Ⓐ	Ⓑ	Ⓒ	Ⓓ
RXD-A5 RXD-501/551	26.0V	-27.0V	55.0V	-55.0V
RXD-A8 RXD-701/751	29.8V	-30.4V	64.3V	-64.3V

(X09-)(B/7) CN5 TERMINAL VOLTAGE

MODELS	①	②	③	④⑤	⑥	⑦	⑧	⑨	⑩	⑪⑫	⑬
RXD-A5 RXD-501/551	-27.0V	24.3V	26.0V	12.2V	10.5V	12.4V	0V	-54.0V	0V	AC5.0V	0V
RXD-A8 RXD-701/751	-30.4V	28.0V	29.8V	11.9V	11.8V	13.7V	0V	-63.2V	0V	AC5.4V	0V

/RXD-551/RXD-571S
/RXD-751/RXD-771S

WH7

E11

*E10

CN6
H.P Lch
H.P Rch
GND
H.P DET

H.P RELAY
K13
D513

FRONT S.P. RELAY
K11

S.W. SPEAKER RELAY
K12

*J4
SUPER WOOFER PRE OUT

*J2
1 Lch
2 Rch
FRONT SPEAKERS (6-16 Ω)

*J2
1 Lch
2 Rch
3 Lch
4 Rch
SUB WOOFER SPEAKERS (12-16 Ω)

*E14 *WH10

-V(PRE) 2 OUT 1 OUT NC SUB GND -V -V -VOUT -VH -VL -ZD +ZD +VL +VOUT GND +VH

*W201 *W47

Q24 *Q504 *Q509 *Q510 *Q511 Q514 *Q512 *Q17

*D510 *D509 D515 D516 D511

R554 10K R552 12K C506 22/35
R567 3.9K R556 3.9K R601 3.9K R576 47K R577 4.7K
R558 18K
R531 0.1 2W R532 0.1 2W *R551 0.1 2W
R533 3.3K R534 3.3K *R553 3.3K
R535 4.7K R536 4.7K *R555 4.7K
*C513 4700P *C514 4700P *C515 4700P
R537 1K R538 1K *R557 1K
C80 0.01 C79 1000P
R539 47K R540 47K *R569 47K
R584 4.7 1/4W L4 R583 4.7 1/4W L3
R573 10K R574 10K
*L5 *R585
R548 4.7 2W R544 4.7 2W R563 4.7 2W
*C521 0.22 *C522 0.22 *C523
*W112 *W109
*C517 *C518 *C519 0.22 *W107
*R561 10K R571 4.7K R572 4.7K
R598 100 2W R587 10K R588 10K R589 1K R53 100K R51 100K R52 100K
R187 3.3 2W R188 3.3 2W
R63 1K 1/4W
*R578 100 2W
R564 47K R575 620 R569 12K R570 12K
*C540 47/35 *C539 47/35
C497 1000P C498 1000P
C525 4700P C526 4700P C527 4700P C528 4700P

0V 0.8V 11.9V 25.2V 25.0V 0.7V 12.1V

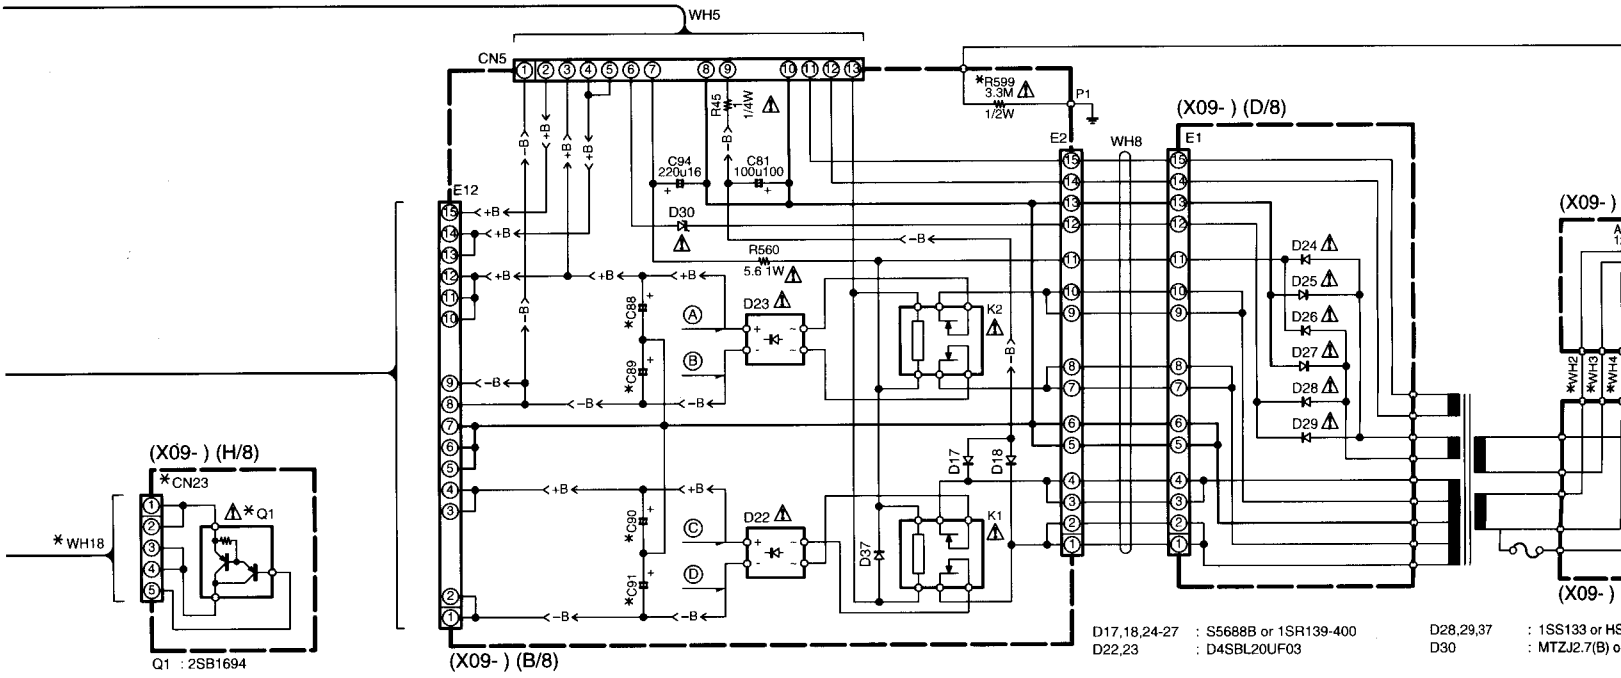

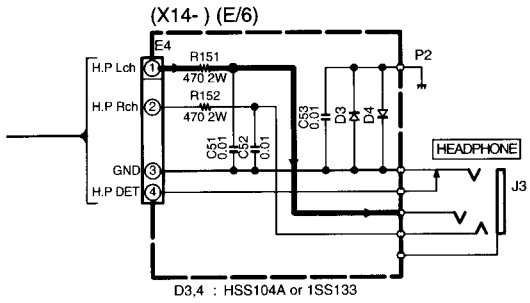

IC21 : *

Q17 : 2SB1624
Q501-507 : 2SC2878(B)
Q509-511 : 2SC1845(F,E)
Q512,514 : 2SC1740S(Q,R) or 2SC2785(F,E)

D509,510 : MTZJ8.2(B) or HZS8.2N(B2)
D511,513,515-517 : 1SS133 or HSS104A

SIGNAL LINE
GND LINE
+B LINE
-B LINE

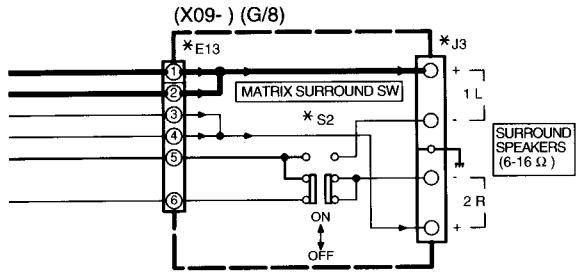

RXD-A5 (X09-6000-11)

DESTINATION		UNIT No.	Ⓐ	R513,515,517,519,521,523,541,542,545,549,551,553,555-559,561,563,567,576-578,581,585,601	R565,566	R569,570,575,599	C88,89	C90,91	C501,502	C505,507,511,515,519,521-523,527-530,533,539,540	C517,518	Q1
COUNTRY	ABB.											
U.S.A	K	0-11	NO	NO	100 1/4W	YES	2200u35	4700u63	2.2u50	NO	0.1	
CANADA	P											

RXD-501 (X09-600X-XX)

DESTINATION		UNIT No.	Ⓐ	R513,515,517,519,521,523,545,549,551,553,555-559,561,563,567,576-578,581,585,599,601	R541,542	R565	R566	R569,570,575	C88,89	C90,91	C501,502	C505,507,511,515,519,523,527,528,533,539,540	C517,518
COUNTRY	ABB.												
EUROPE	E	2-71	NO	NO	YES	100 1/4W	100 1/4W	YES	2200u35	4700u63	2.2u50	NO	0.22
U.K.	T	0-51											
AUSTRALIA	X	0-71	YES		NO	NO							0.1
JAPAN	J	0-00	NO										

RXD-501E/551E (X09-6002-71)

DESTINATION		UNIT No.	Ⓐ	R513,515,517,519,521,523,545,549,551,553,555-559,561,563,567,576-578,581,585,599,601	R541,542,569,570,575	R565,566	C88,89	C90,91	C501,502	C505,507,511,515,519,523,527,528,533,539,540	C517,518	C521,529,5
COUNTRY	ABB.											
EUROPE	E2	2-71	NO	NO	YES	100 1/4W	2200u35	4700u63	2.2u50	NO	0.22	YES

RXD-501W/551W (X09-6003-81)

DESTINATION		UNIT No.	Ⓐ	R513,515,517,519,521,523,545,549,551,553,555-559,561,563,567,576-578,581,585,599,601	R541,542,569,570,575	R565,566	C88,89	C90,91	C501,502	C505,507,511,515,519,523,527,528,533,539,540	C517,518	C521,529,5
COUNTRY	ABB.											
RUSSIA	Q	3-81	NO	NO	YES	100 1/4W	2200u35	4700u63	2.2u50	NO	0.22	YES

RXD-551 (X09-600X-XX)

DESTINATION		UNIT No.	Ⓐ	R513,515,517,519,521,523,545,549,551,553,555-559,561,563,567,576-578,581,585,599,601	R541,542	R565	R566	R569,570,575	C88,89	C90,91	C501,502	C505,507,511,515,519,523,527,528,533,539,540	C51
COUNTRY	ABB.												
EUROPE	E	2-71	NO	NO	YES	100 1/4W	100 1/4W	YES	2200u35	4700u63	2.2u50	NO	0.2
U.K.	T	0-51											
AUSTRALIA	X	0-71	YES		NO	NO							0.1
JAPAN	J	0-00	NO										
PX	Y	0-21	YES										0.2
GENERALMARKET	M												

RXD-571S (X09-6000-22)

DESTINATION		UNIT No.	Ⓐ	R513,515,517,519,521,523,541,542,545,549,551,553,555-559,561,563,565,567,576-578,581,585,599,601	R566	R569,570,575	C88,89	C90,91	C501,502	C505,507,511,515,519,523,527-530,533,539,540	C517,518	C521,522
COUNTRY	ABB.											
GENERALMARKET	M	0-22	YES	NO	100 1/4W	YES	2200u35	4700u63	2.2u50	NO	0.22	YES

RXD-A8 (X09-4940-10)

DESTINATION		UNIT No.	Ⓐ	R513,515,517,519,521,523,545,549,551,553,555-557,559,561,563,576,581,585,599,601	R541,542,558,567,569,570,575-577	R565,566	C88,89	C90,91	C501,502	C505,507,511,515,527,528,533,539,540	C519,521,522,529,530
COUNTRY	ABB.										
U.S.A	K	0-10	NO	YES	NO	220 1/4W	4700u35	4700u75	0.056u50	YES	NO
CANADA	P										

RXD-701 (X09-494X-XX)

DESTINATION		UNIT No.	Ⓐ	R513,515,517,519,521,523,545,549,551,553,555-559,561,563,567,576-578,581,585	R541,542	R569,570,575,599,601	R565,566	C88,89	C90,91	C501,502	C505,507,511,515,519,521,522,527,528,533,539,540	C517
COUNTRY	ABB.											
EUROPE	E	2-71	NO	YES	YES	NO	220 1/4W	4700u35	4700u75	0.056u50	YES	0.22
U.K.	T	0-51			NO							
AUSTRALIA	X	0-71										

RXD-701E/751E (X09-4942-71)

DESTINATION		UNIT No.	Ⓐ	R513,515,517,519,521,523,541,542,545,549,551,553,555-559,561,563,567,576-578,581,585	R569,570,575,599,601	R565,566	C88,89	C90,91	C501,502	C505,507,511,515,519,521,522,527-530,533,539,540	C517,518,523
COUNTRY	ABB.										
EUROPE	E2	2-71	NO	YES	NO	220 1/4W	4700u35	4700u75	0.056u50	YES	0.22

RXD-701W/751W (X09-4943-81)

DESTINATION		UNIT No.	Ⓐ	R513,515,517,519,521,523,541,542,545,549,551,553,555-559,561,563,567,576-578,581,585	R569,570,575,599,601	R565,566	C88,89	C90,91	C501,502	C505,507,511,515,519,521,522,527-530,533,539,540	C517,518,523
COUNTRY	ABB.										
RUSSIA	Q	3-81	NO	YES	NO	220 1/4W	4700u35	4700u75	0.056u50	YES	0.22

RXD-751 (X09-494X-XX)

DESTINATION		UNIT No.	Ⓐ	R513,515,517,519,521,523,545,549,551,553,555-559,561,563,567,576-578,581,585	R541,542	R569,570,575,599,601	R565,566	C88,89	C90,91	C501,502	C505,507,511,515,519,521,522,527,528,533,539,540	C51
COUNTRY	ABB.											
EUROPE	E	2-71	NO	YES	YES	NO	220 1/4W	4700u35	4700u75	0.056u50	YES	0.2
U.K.	T	0-51			NO							
AUSTRALIA	X	0-71										
PX	Y	0-21										
GENERALMARKET	M											

RXD-771S (X09-4940-22)

DESTINATION		UNIT No.	Ⓐ	R513,515,517,519,521,523,545,549,551,553,555-559,561,563,567,576-578,581,585	R541,542,569,570,575,599,601	C88,89	C90,91	C501,502	C505,507,511,515,519,521,522,527,528,533,539,540	C517,518,523	C529,530	R
COUNTRY	ABB.											
GENERALMARKET	M	0-22	NO	YES	NO	4700u35	4700u75	0.056u50	YES	0.22	NO	

RXD-A5/A8(K) (7/8)
RXD-501/501E/501W(E) (7/8)
RXD-551/551E/551W/571S(E) (7/8)
RXD-701/701E/701W(E) (7/8)
RXD-751/751E/751W/771S(E) (7/8)

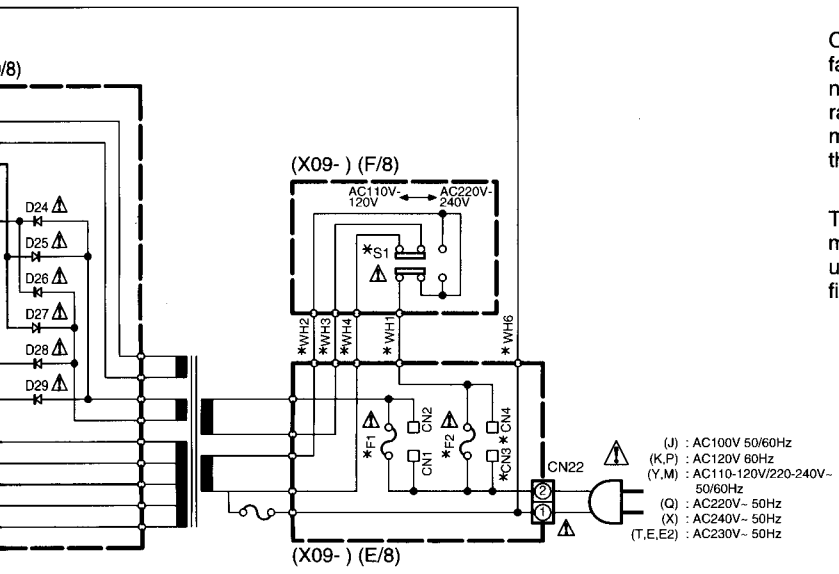

CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). ⚠ indicates safety critical components. For continued protection against risk of fire, replace only with same type and rating fuse(s). To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

The DC voltage is an actual reading measured with a high impedance type voltmeter. The measurement value may vary depending on the measuring instruments used or on the product. Refer to the voltage dur ing PLAY unless otherwise specified; The value shown in ( ) is the voltage measured at the moment of STOP.

or 1SR139-400 D28,29,37 : 1SS133 or HSS104A
)UF03 D30 : MTZJ2.7(B) or HZS2.7N(B2)

,	C90, 91	C501, 502	C505,507,511,515,519, 521-523,527-530,533,539,540	C517, 518	Q1,503,504, 507,511	Q17	S1,2	W107	W27,47,104, 109,112,201	WH1-4, 10,18	D509, 510,517	CN3, 4,23	E10, 13,14	J2	J3	J4	K12	L5	IC21	F1	F2
u35	4700u63	2.2u50	NO	0.1	NO	YES	NO	NO	YES	NO	NO	NO	NO	E70-0057-05	NO	YES	NO	NO	STK407-710K	4A 125V	NO

69, 575	C88, 89	C90, 91	C501, 502	C505,507,511,515,519, 523,527,528,533,539,540	C517, 518	C521, 522	C529, 530	Q1	Q17	Q503,504, 507,511	S1	S2	W27, 104	W47, 201	W107	W109, 112	WH1-4	WH10, 18	D509, 510,517	CN3,4	CN23	E10, 13,14	J2	J3	J4	K12	L5	IC21	F1	F2
ES	2200u35	4700u63	2.2u50	NO	0.22	YES	YES	NO	YES	NO	NO	NO	NO	YES	YES	NO	NO	NO	NO	NO	NO	NO	NO	E70-0057-05	NO	YES	YES	NO	NO	STK407-710K	T2A L 250V	NO
					0.1	NO	NO	YES	NO			YES	YES				YES	YES				YES	YES		NO					4A 125V	

C88, 89	C90, 91	C501, 502	C505,507,511,515,519, 523,527,528,533,539,540	C517, 518	C521,522, 529,530	Q1,503, 504,507,511	Q17	S1,2	W27,104 107,109,112	W47, 201	WH1-4, 10,18	D509, 510,517	CN3, 4,23	E10 13,14	J2	J3	J4	K12	L5	IC21	F1	F2
00u35	4700u63	2.2u50	NO	0.22	YES	NO	YES	NO	NO	YES	NO	NO	NO	NO	E70-0057-05	NO	YES	NO	NO	STK407-710K	T2A L 250V	NO

C88, 89	C90, 91	C501, 502	C505,507,511,515,519, 523,527,528,533,539,540	C517, 518	C521,522, 529,530	Q1,503, 504,507,511	Q17	S1,2	W27,104 107,109,112	W47, 201	WH1-4, 10,18	D509, 510,517	CN3, 4,23	E10 13,14	J2	J3	J4	K12	L5	IC21	F1	F2
00u35	4700u63	2.2u50	NO	0.22	YES	NO	YES	NO	NO	YES	NO	NO	NO	NO	E70-0057-05	NO	YES	NO	NO	STK407-710K	T2A L 250V	NO

569, 575	C88, 89	C90, 91	C501, 502	C505,507,511,515,519, 523,527,528,533,539,540	C517, 518	C521, 522	C529, 530	Q1	Q17	Q503,504, 507,511	S1	S2	W27, 104	W47, 201	W107	W109, 112	WH1-4	WH10, 18	D509, 510,517	CN23	E10, 13,14	J2	J3	J4	K12	L5	IC21	F1	F2
ES	2200u35	4700u63	2.2u50	NO	0.22	YES	YES	NO	YES	NO	NO	NO	NO	YES	YES	NO	NO	NO	NO	NO	NO	NO	NO	E70-0057-05	NO	YES	YES	NO	NO	STK407-710K	T2A L 250V	NO
					0.1	NO	NO	YES	NO			YES	YES				YES	NO				YES	YES		NO					4A 125V	
					0.22	YES	NO	NO	YES	NO		YES	YES				NO	YES	YES			YES	YES		YES					T2A L 250V	T2A L 250V

C88, 89	C90, 91	C501, 502	C505,507,511,515,519, 523,527-530,533,539,540	C517, 518	C521, 522	Q1	Q17,503,504, 507,511	S1,2	W27,47, 104,201	W107, 109,112	WH1-4, 10,18	D509, 510,517	CN3, 4,23	E10, 13,14	J2	J3,4	K12	L5	IC21	F1,2
00u35	4700u63	2.2u50	NO	0.22	YES	YES	NO	YES	YES	NO	YES	NO	YES	YES	E70-0057-05	YES	NO	NO	STK407-710K	T2A L 250V

C88, 89	C90, 91	C501, 502	C505,507,511,515, 527,528,533,539,540	C519,521, 522,529,530	C517, 518,523	Q1, 504	Q17,503, 507,511	S1,2	W27,104, 107,109,112	W47, 201	WH1-4, 10,18	D509, 510,517	CN3, 4,23	E10, 13,14	J2	J3,4	K12	L5	IC21	F1	F2
4700u35	4700u75	0.056u50	YES	NO	0.1	NO	YES	NO	YES	NO	NO	YES	NO	NO	E70-0048-05	NO	YES	YES	STK401-030K or STK401-030D	5A 125V	NO

C88, 89	C90, 91	C501, 502	C505,507,511,515,519,521, 522,527,528,533,539,540	C517, 518,523	C529, 530	Q1	Q17,503,504, 507,511	S1	S2	W27, 104	W47,107, 109,112,201	WH10	WH1-4, 18	D509, 510,517	CN3, 4,23	E10	E13,14	J2	J3	J4	K12	L5	IC21	F1	F2
4700u35	4700u75	0.056u50	YES	0.22	YES	NO	YES	NO	YES	NO	NO	YES	NO	YES	NO	NO	YES	E70-0048-05	YES	NO	YES	YES	STK401-030K or STK401-030D	T3.15A L 250V	NO
					NO					YES															

88, 89	C90, 91	C501, 502	C505,507,511,515,519,521, 522,527-530,533,539,540	C517, 518,523	Q1	Q17,503,504, 507,511	S1	S2	W27,47,104, 107,109,112,201	WH10	WH1-4, 18	D509, 510,517	CN3, 4,23	E10	E13,14	J2	J3	J4	K12	L5	IC21	F1	F2
00u35	4700u75	0.056u50	YES	0.22	NO	YES	NO	YES	NO	YES	NO	YES	NO	NO	YES	E70-0048-05	YES	NO	YES	YES	STK401-030K or STK401-030D	T3.15A L 250V	NO

C88, 89	C90, 91	C501, 502	C505,507,511,515,519,521, 522,527-530,533,539,540	C517, 518,523	Q1	Q17,503,504, 507,511	S1	S2	W27,47,104, 107,109,112,201	WH10	WH1-4, 18	D509, 510,517	CN3, 4,23	E10	E13,14	J2	J3	J4	K12	L5	IC21	F1	F2
00u35	4700u75	0.056u50	YES	0.22	NO	YES	NO	YES	NO	YES	NO	YES	NO	NO	YES	E70-0048-05	YES	NO	YES	YES	STK401-030K or STK401-030D	T3.15A L 250V	NO

C88, 89	C90, 91	C501, 502	C505,507,511,515,519,521, 522,527,528,533,539,540	C517, 518,523	C529, 530	Q1	Q17,503,504, 507,511	S1	S2	W27, 104	W47,107, 109,112,201	WH1-4	WH10	WH18	D509, 510,517	CN3,4	CN23	E10	E13,14	J2	J3	J4	K12	L5	IC21	F1	F2
4700u35	4700u75	0.056u50	YES	0.22	YES	NO	YES	NO	YES	NO	NO	NO	YES	NO	YES	NO	NO	NO	YES	E70-0048-05	YES	NO	YES	YES	STK401-030K or STK401-030D	T3.15A L 250V	NO
					NO			YES		YES		YES				YES											T3.15A L 250V

C90, 91	C501, 502	C505,507,511,515,519,521, 522,527,528,533,539,540	C517, 518,523	C529, 530	R565, 566	Q1	Q17,503,504, 507,511	S1,2	W27, 104	W47,107, 109,112,201	WH1-4, 10	WH18	D509, 510,517	CN3,4	CN23	E10	E13,14	J2	J3	J4	K12	L5	IC21	F1,2
4700u75	0.056u50	YES	0.22	NO	220 1/4W	NO	YES	YES	YES	NO	YES	NO	YES	YES	NO	NO	YES	E70-0048-05	YES	NO	YES	YES	STK401-030K or STK401-030D	T3.15A L 250V

KENWOOD

RXD-A5 (X14-4740-10)

DESTINATION		UNIT No.	Ⓐ, Ⓓ	Ⓔ	R254-258	D20,21,30-32	D33-37	W1,4
COUNTRY	ABB.							
U.S.A	K	0-10	NO	YES	NO	B30-2468-05	NO	YES
CANADA	P							

RXD-501 (X14-4740-XX)

DESTINATION		UNIT No.	Ⓐ	Ⓓ	Ⓔ	R254-258	D20,21,30-32	D33-37	W1,4
COUNTRY	ABB.								
JAPAN	J	0-10	NO	NO	YES	NO	B30-2468-05	NO	YES
EUROPE	E								
U.K	T								
AUSTRALIA	X	0-21	YES				B30-2508-05		

RXD-501E/551E (X14-4740-10)

DESTINATION		UNIT No.	Ⓐ	Ⓓ	Ⓔ	R254-258	D20,21,30-32	D33-37	W1,4
COUNTRY	ABB.								
EUROPE	E2	0-10	NO	YES	NO	B30-2468-05	NO	YES	

RXD-501W/551W (X14-4740-10)

DESTINATION		UNIT No.	Ⓐ, Ⓓ	Ⓔ	R254-258	D20,21,30-32	D33-37	W1,4
COUNTRY	ABB.							
RUSSIA	Q	0-10	NO	YES	NO	B30-2468-05	NO	YES

RXD-551 (X14-4740-XX)

DESTINATION		UNIT No.	Ⓐ	Ⓓ	Ⓔ	R254-258	D20,21,30-32	D33-37	W1,4
COUNTRY	ABB.								
JAPAN	J	0-10	NO	NO	YES	NO	B30-2468-05	NO	YES
EUROPE	E								
U.K	T								
PX	Y								
GENERAL MARKET	M	0-21	YES				B30-2508-05		
AUSTRALIA	X								

RXD-571S (X14-4740-21)

DESTINATION		UNIT No.	Ⓐ, Ⓔ	Ⓓ	R254-258	D20,21,30-32	D33-37	W1,4
COUNTRY	ABB.							
GENERAL MARKET	M	0-21	YES	NO	NO	B30-2508-05	NO	YES

RXD-A8 (X14-4740-11)

DESTINATION		UNIT No.	Ⓐ, Ⓔ	Ⓓ	R254-258	D20,21,30-37	W1,4
COUNTRY	ABB.						
U.S.A	K	0-11	NO	YES	YES	B30-2468-05	NO
CANADA	P						

RXD-701 (X14-4740-XX)

DESTINATION		UNIT No.	Ⓐ	Ⓓ	Ⓔ	R254-258	D20,21,30-37	W1,4
COUNTRY	ABB.							
EUROPE	E	0-11	NO	YES	NO	YES	B30-2468-05	NO
U.K	T							
AUSTRALIA	X	0-22	YES				B30-2508-05	

RXD-701E/751E (X14-4740-11)

DESTINATION		UNIT No.	Ⓐ, Ⓔ	Ⓓ	R254-258	D20,21,30-37	W1,4
COUNTRY	ABB.						
EUROPE	E2	0-11	NO	YES	YES	B30-2468-05	NO

RXD-701W/751W (X14-4740-11)

DESTINATION		UNIT No.	Ⓐ, Ⓔ	Ⓓ	R254-258	D20,21,30-37	W1,4
COUNTRY	ABB.						
RUSSIA	Q	0-11	NO	YES	YES	B30-2468-05	NO

RXD-751 (X14-4740-XX)

DESTINATION		UNIT No.	Ⓐ	Ⓓ	Ⓔ	R254-258	D20,21,30-37	W1,4
COUNTRY	ABB.							
EUROPE	E	0-11	NO				B30-2468-05	
U.K	T							
PX	Y			YES	NO	YES		NO
GENERAL MARKET	M	0-22	YES				B30-2508-05	
AUSTRALIA	X							

RXD-771S (X14-4740-22)

DESTINATION		UNIT No.	Ⓐ, Ⓓ	Ⓔ	R254-258	D20,21,30-37	W1,4
COUNTRY	ABB.						
GENERAL MARKET	M	0-22	YES	NO	YES	B30-2508-05	NO

DISPLAY UNIT
(X14-4740-XX) (A/6)

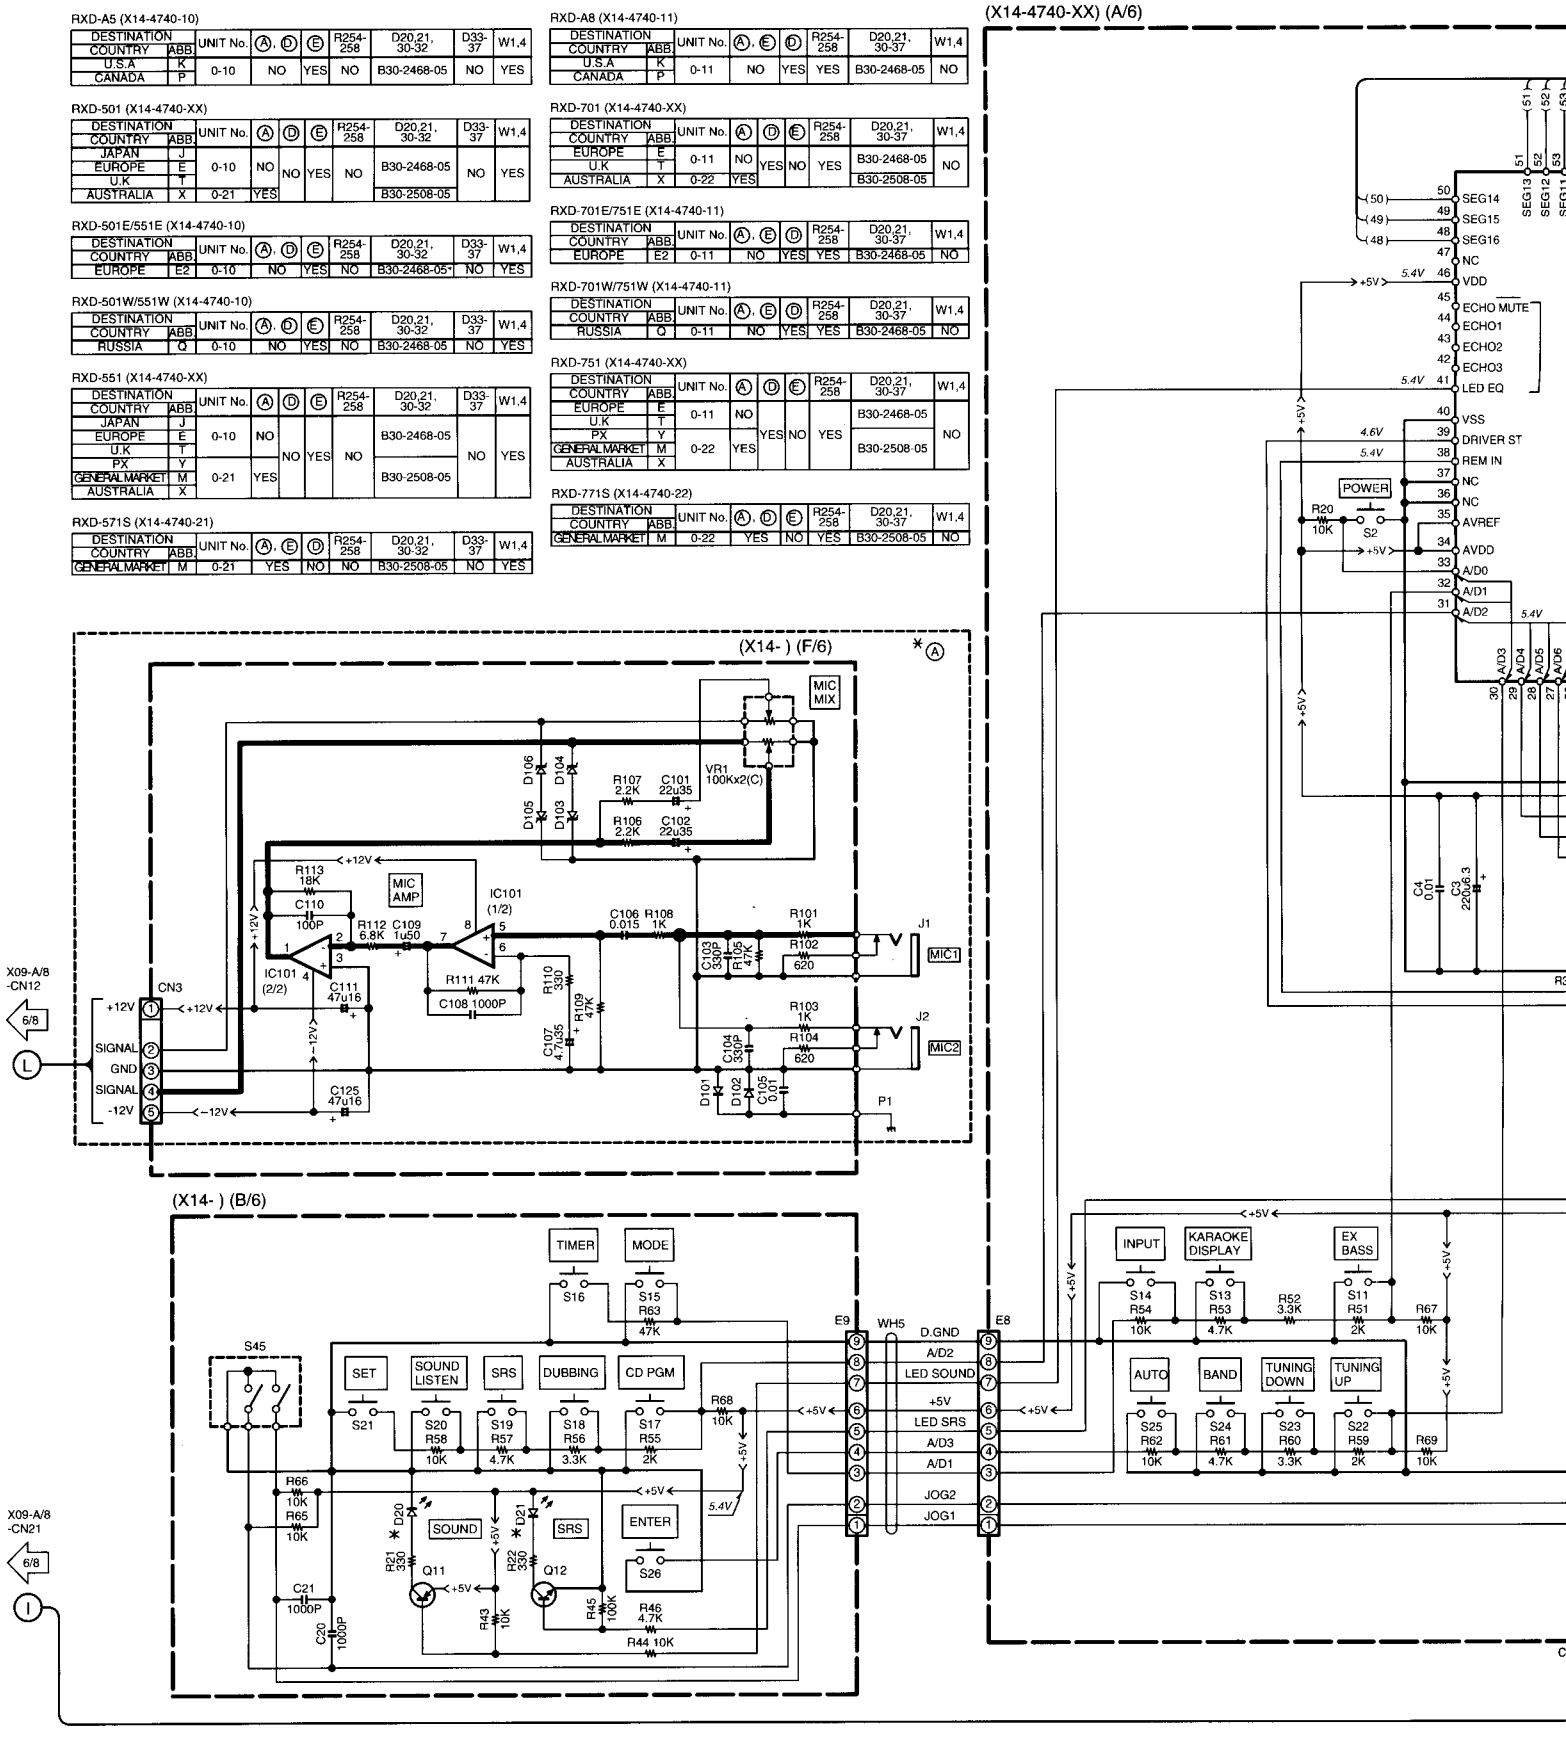

CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). ⚠ indicates safety critical components. For continued protection against risk of fire, replace only with same type and rating fuse(s). To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

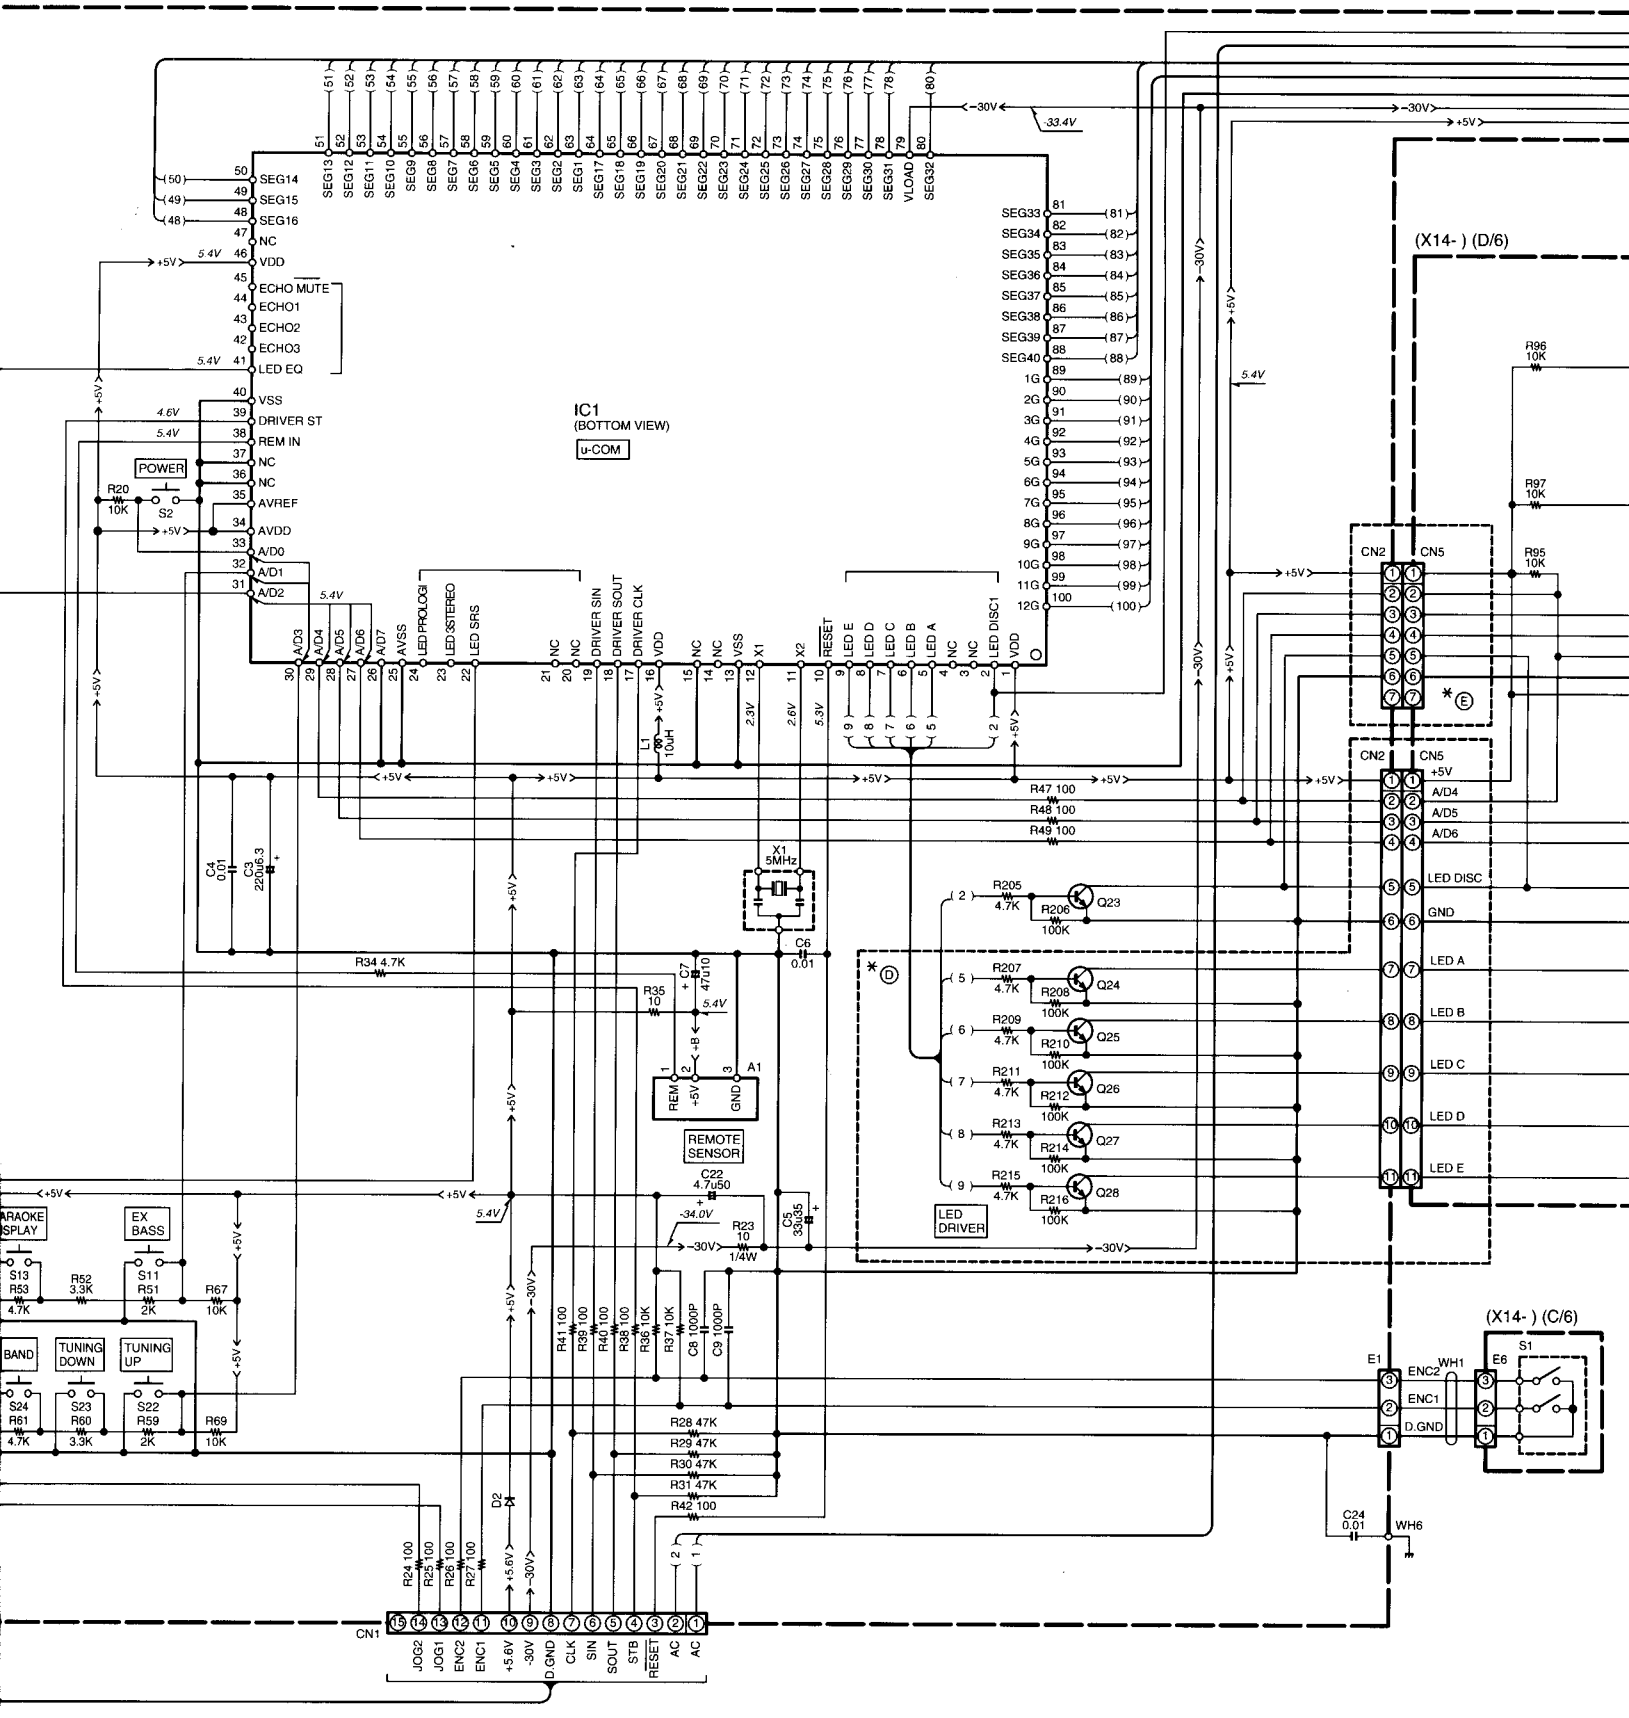

The DC voltage is an actual reading measured with a high impedance type voltmeter. The measurement value may vary depending on the measuring instruments used or on the product. Refer to the voltage dur ing PLAY unless otherwise specified; The value shown in ( ) is the voltage measured at the moment of STOP.

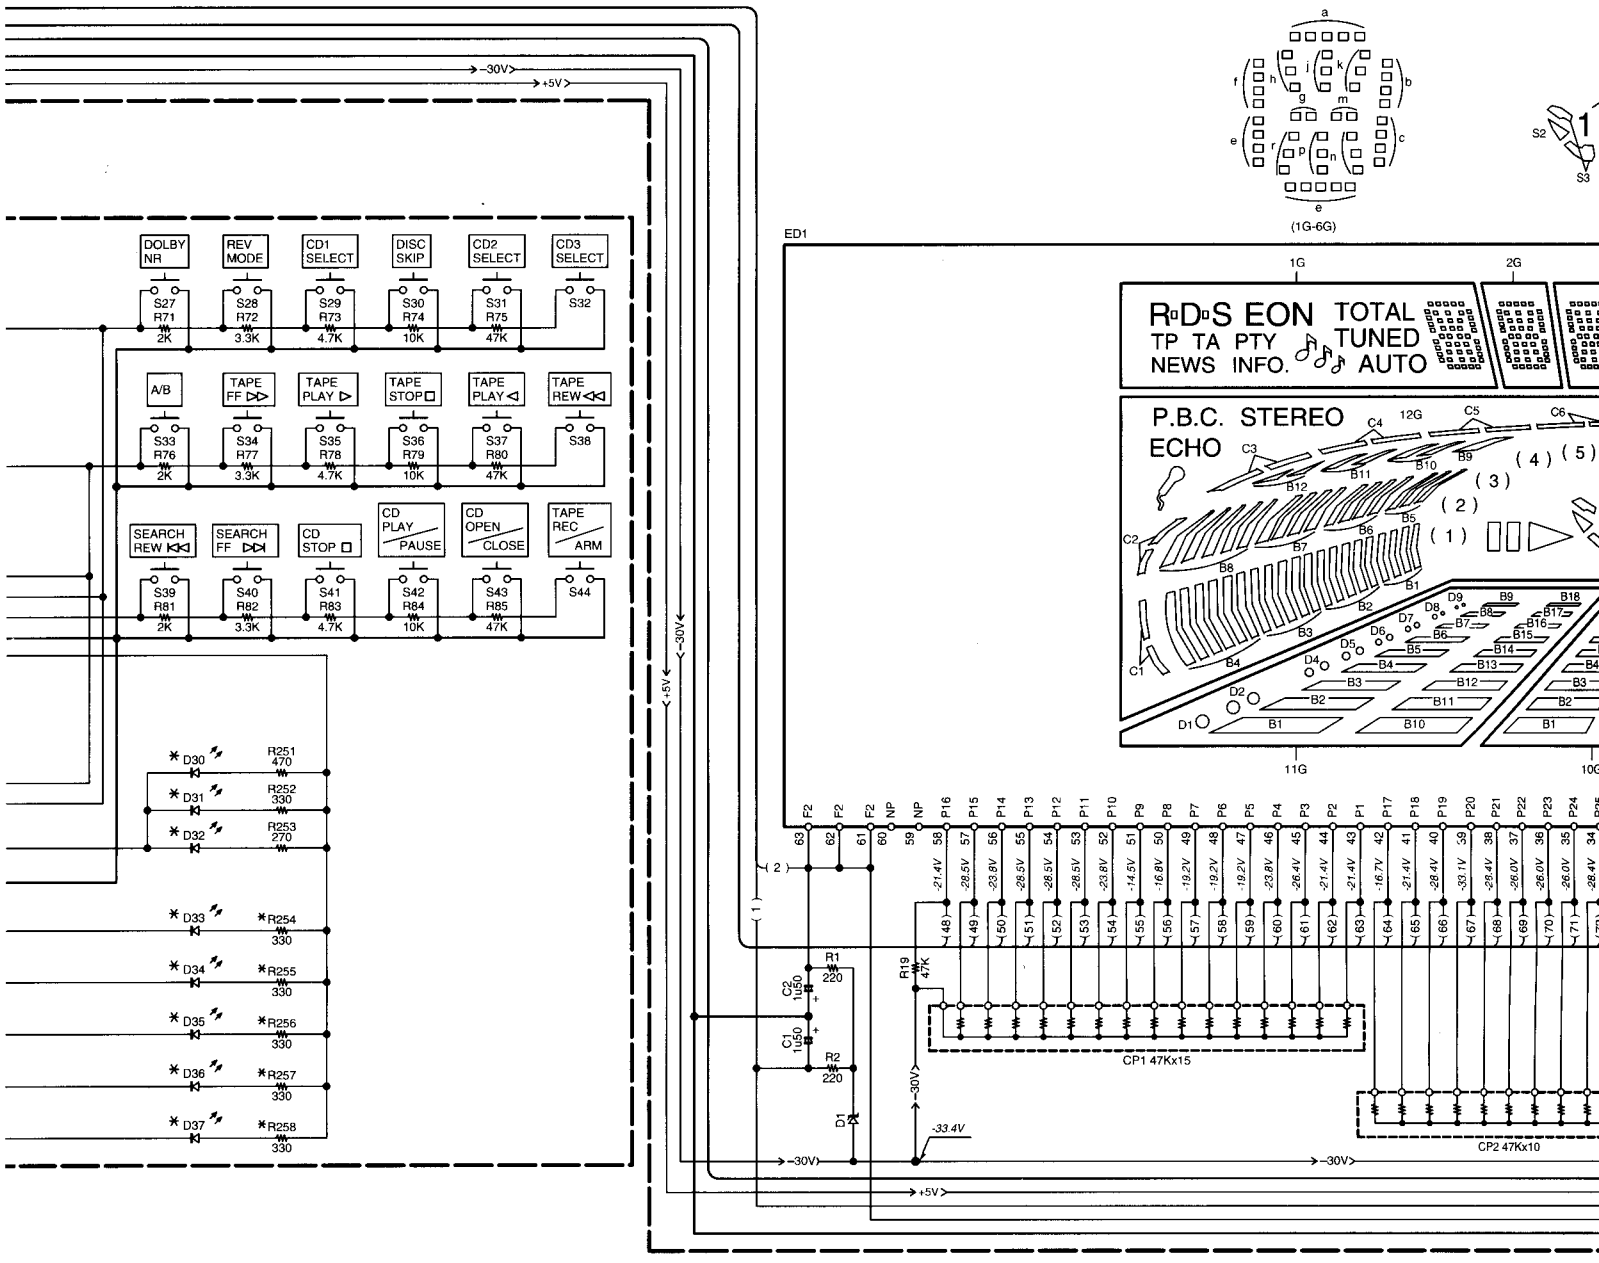

IC1	: uPD780204-038
IC101	: NJM4565D-D
Q1-8,12,23-28	: KTC3199(Y,GR) or 2SC1740S(Q,R)
Q9	: 2SC2003(L,K)
Q10,11	: KTA1267(Y,GR) or 2SA933AS(Q,R)
ED1	: BJ594GK
D1,5	: HZS6.8N(B) or MTZJ6.8(B)
D2	: S5688B
D6,7	: B30-2468-05
D20,21,30-37	: *
D101,102	: HSS104A or 1SS133
D103-106	: HZS5.6N(B) or MTZJ5.6(B)

SIGNAL LINE
GND LINE
+B LINE
-B LINE

	1G	2G	3G	4G	5G	6G	7G	8G
P1	a	a	1a	1a	1a	1a	B1	B1
P2	h	h	1h	1h	1h	1h	B2	B2
P3	j	j	1j	1j	1j	1j	B3	B3
P4	k	k	1k	1k	1k	1k	B4	B4
P5	b	b	1b	1b	1b	1b	B5	B5
P6	f	f	1f	1f	1f	1f	B6	B6
P7	m	m	1m	1m	1m	1m	B7	B7
P8	g	g	1g	1g	1g	1g	B8	B8
P9	c	c	1c	1c	1c	1c	B9	B9
P10	e	e	1e	1e	1e	1e	B10	B10
P11	r	r	1r	1r	1r	1r	B11	B11
P12	p	p	1p	1p	1p	1p	B12	B12
P13	n	n	1n	1n	1n	1n	C1	B13
P14	d	d	1d	1d	1d	1d	C2	B14
P15	R·D·S	-	-	-	-	col	C3	B15
P16	EON	-	-	-	-	Dp	C4	B16
P17	TP	-	2a	2a	2a	2a	C5	B17
P18	TA	-	2h	2h	2h	2h	C6	B18
P19	PTY	-	2j	2j	2j	2j	C7	-
P20	NEWS	-	2k	2k	2k	2k	(9)	-
P21	INFO.	-	2b	2b	2b	2b	(10)	-
P22	TOTAL	-	2f	2f	2f	2f	(11)	-
P23	TUNED	-	2m	2m	2m	2m	(12)	-

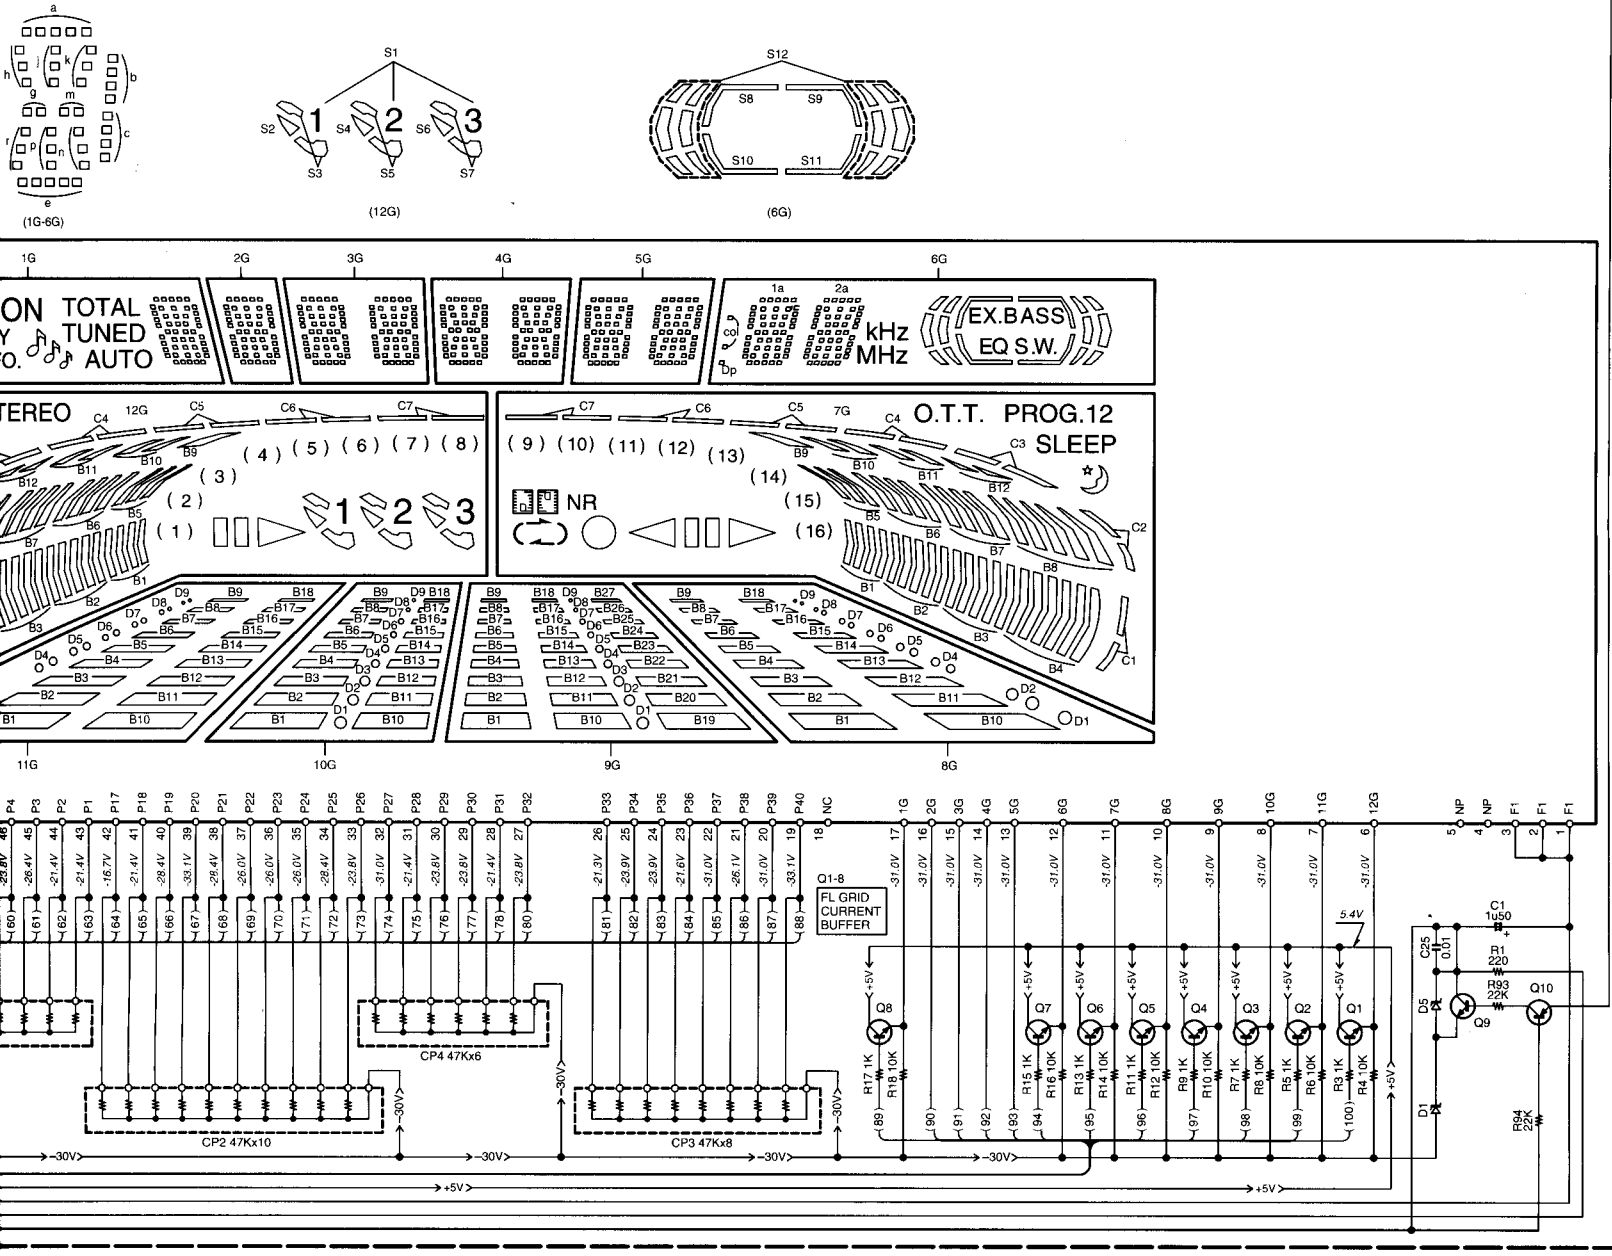

	2G	3G	4G	5G	6G	7G	8G	9G	10G	11G	12G
a		1a	1a	1a	1a	B1	B1	B1	B1	B1	B1
h		1h	1h	1h	1h	B2	B2	B2	B2	B2	B2
j		1j	1j	1j	1j	B3	B3	B3	B3	B3	B3
k		1k	1k	1k	1k	B4	B4	B4	B4	B4	B4
b		1b	1b	1b	1b	B5	B5	B5	B5	B5	B5
f		1f	1f	1f	1f	B6	B6	B6	B6	B6	B6
m		1m	1m	1m	1m	B7	B7	B7	B7	B7	B7
g		1g	1g	1g	1g	B8	B8	B8	B8	B8	B8
c		1c	1c	1c	1c	B9	B9	B9	B9	B9	B9
e		1e	1e	1e	1e	B10	B10	B10	B10	B10	B10
r		1r	1r	1r	1r	B11	B11	B11	B11	B11	B11
p		1p	1p	1p	1p	B12	B12	B12	B12	B12	B12
n		1n	1n	1n	1n	C1	B13	B13	B13	B13	C1
d		1d	1d	1d	1d	C2	B14	B14	B14	B14	C2
-	-	-	-	-	col	C3	B15	B15	B15	B15	C3
-	-	-	-	-	Dp	C4	B16	B16	B16	B16	C4
-		2a	2a	2a	2a	C5	B17	B17	B17	B17	C5
-		2h	2h	2h	2h	C6	B18	B18	B18	B18	C6
-		2j	2j	2j	2j	C7	-	B19	-	-	C7
-		2k	2k	2k	2k	(9)	-	B20	-	-	(1)
-		2b	2b	2b	2b	(10)	-	B21	-	-	(2)
-		2f	2f	2f	2f	(11)	-	B22	-	-	(3)
-		2m	2m	2m	2m	(12)	-	B23	-	-	(4)

	1G	2G	3G	4G	5G	6G	7G	8G	9G	10G	11G	12G
P24	AUTO	-	2g	2g	2g	2g	(13)	-	B24	-	-	(5)
P25	(UPER)	-	2c	2c	2c	2c	(14)	-	B25	-	-	(6)
P26	(MIDDLE)	-	2e	2e	2e	2e	(15)	-	B26	-	-	(7)
P27	(LOWER)	-	2r	2r	2r	2r	(16)	-	B27	-	-	(8)
P28	-	-	2p	2p	2p	2p	O.T.T.	D1	D1	D1	D1	S1
P29	-	-	2n	2n	2n	2n	PROG.	D2	D2	D2	D2	S2
P30	-	-	2d	2d	2d	2d	1	-	D3	D3	-	S3
P31	-	-	-	-	-	-	MHz	2	D4	D4	D4	S4
P32	-	-	-	-	-	-	kHz	SLEEP	D5	D5	D5	S5
P33	-	-	-	-	-	-	S8	NR	D6	D6	D6	S6
P34	-	-	-	-	-	-	S9	○	D7	D7	D7	S7
P35	-	-	-	-	-	-	S10	◁	D8	D8	D8	▷
P36	-	-	-	-	-	-	S11	▷	D9	D9	D9	▯▯
P37	-	-	-	-	-	-	S12	▯▯	-	-	-	P.B.C.
P38	-	-	-	-	-	-	EX.BASS	⇌	-	-	-	STEREO
P39	-	-	-	-	-	-	EQ	❩	-	-	-	ECHO
P40	-	-	-	-	-	-	S.W.	❨	-	-	-	(MIC)

RXD-A5/A8(K) (8/8)
RXD-501/501E/501W(E) (8/8)
RXD-551/551E/551W571S(E) (8/8)
RXD-701/701E/701W(E) (8/8)
RXD-751/751E/751W/771S(E) (8/8)

RXD-501/551/571/A5/701/751/771/A

KENWOOD

EXPLODED VIEW (CD MECHANISM)

L	M2x8(Bi-Tap)	:N09-2658-08
M	SCREW(B)	:N09-3053-08
N	SCREW(C)	:N09-3107-08
P	SCREW(E)	:N09-3140-08
Q	SCREW(F)	:N09-3141-08
R	M2x3	:N30-2003-46
SA	M2x12(Bi-Tap)	:N89-2012-46
UA	M2.6x8(Bi-Tap)	:N89-2608-46
TA	M2.6x6 (F)	:N30-2606-46
VA	M2x5 (Bi-Tap)	:N86-2005-46

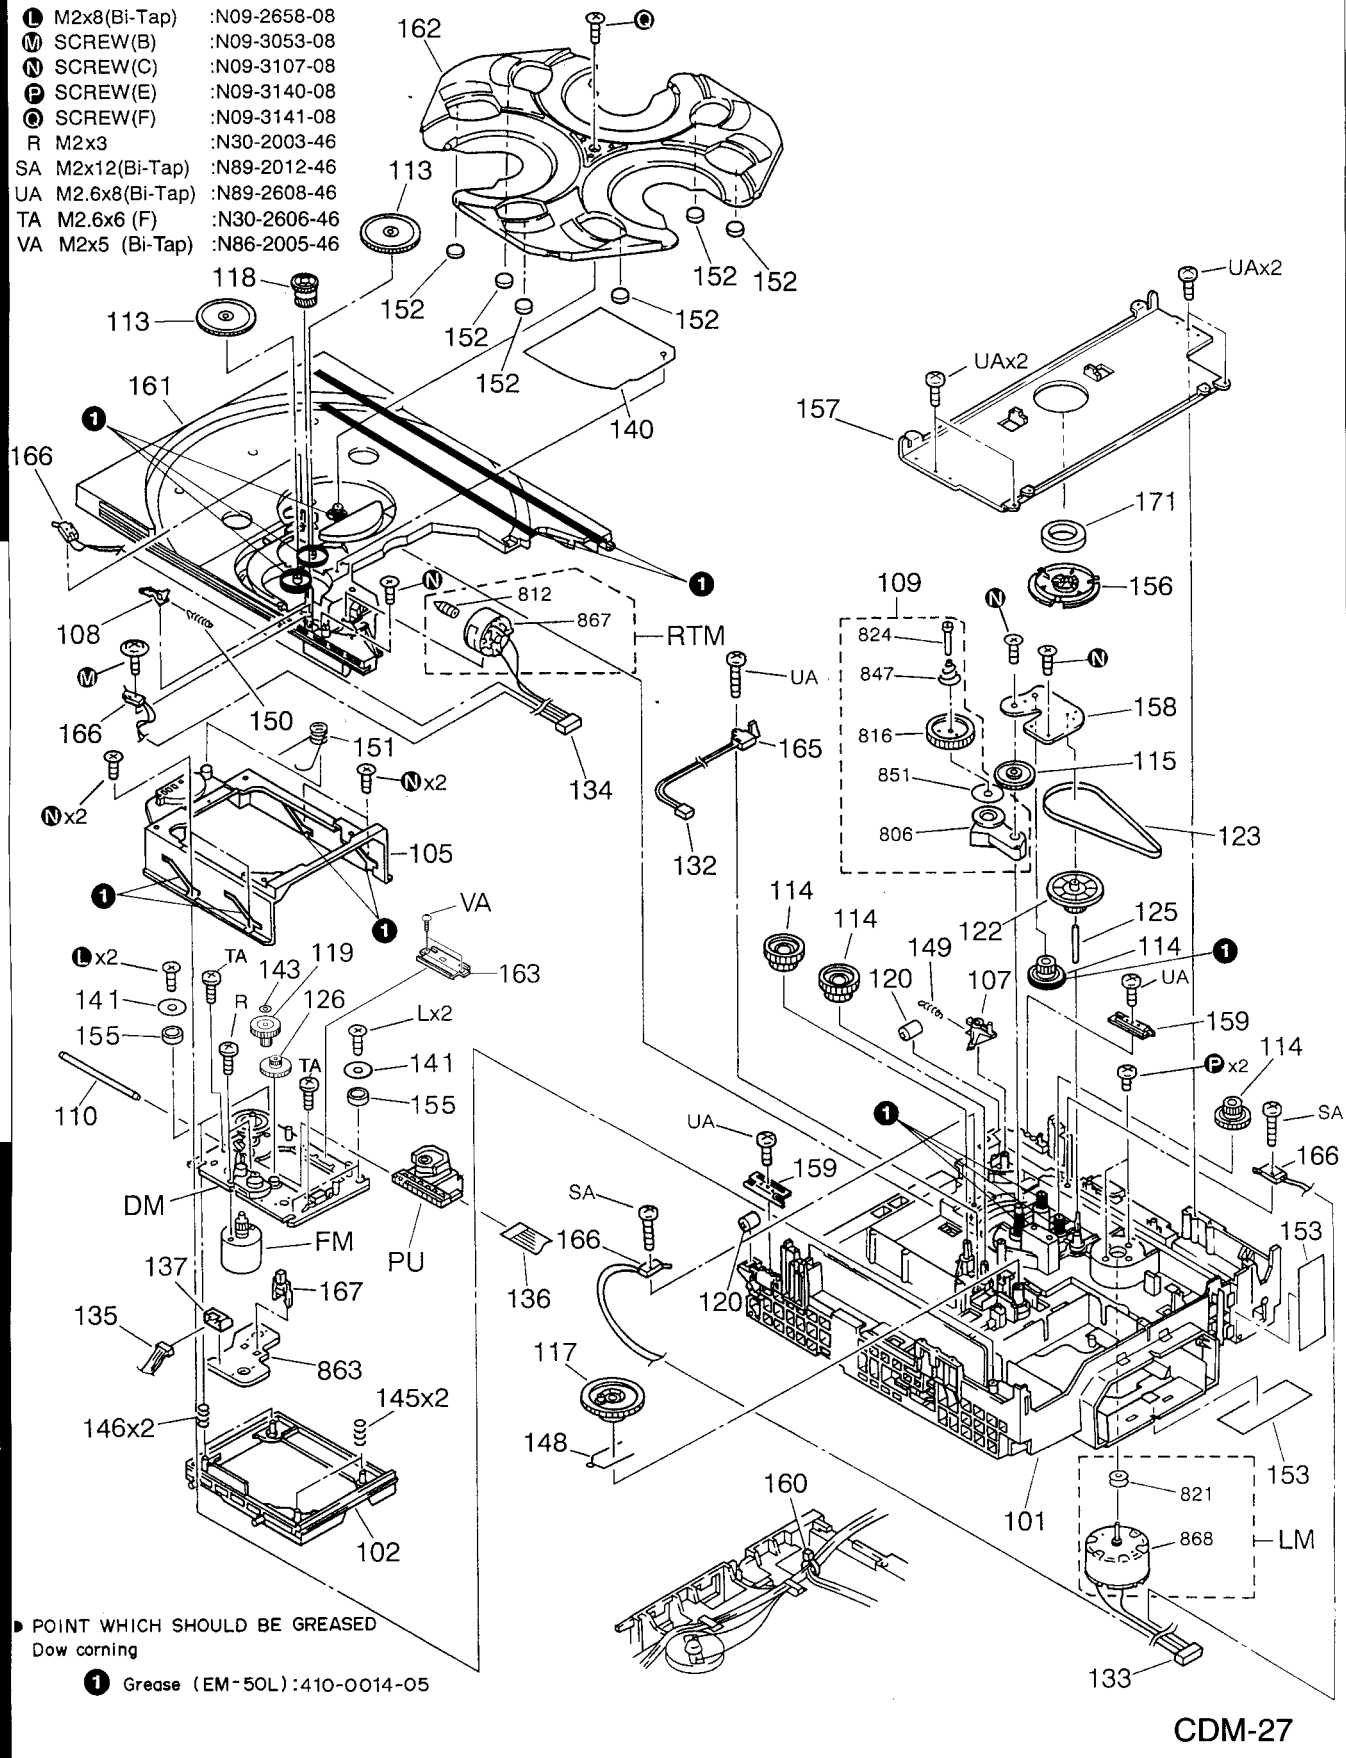

● POINT WHICH SHOULD BE GREASED
Dow corning

1 Grease (EM-50L):410-0014-05

CDM-27

Parts with exploded numbers larger than 700 are not supplied.

RXD-501/551/571/A5/701/751/771/A8

EXPLODED VIEW (CASSETTE MECHANISM)

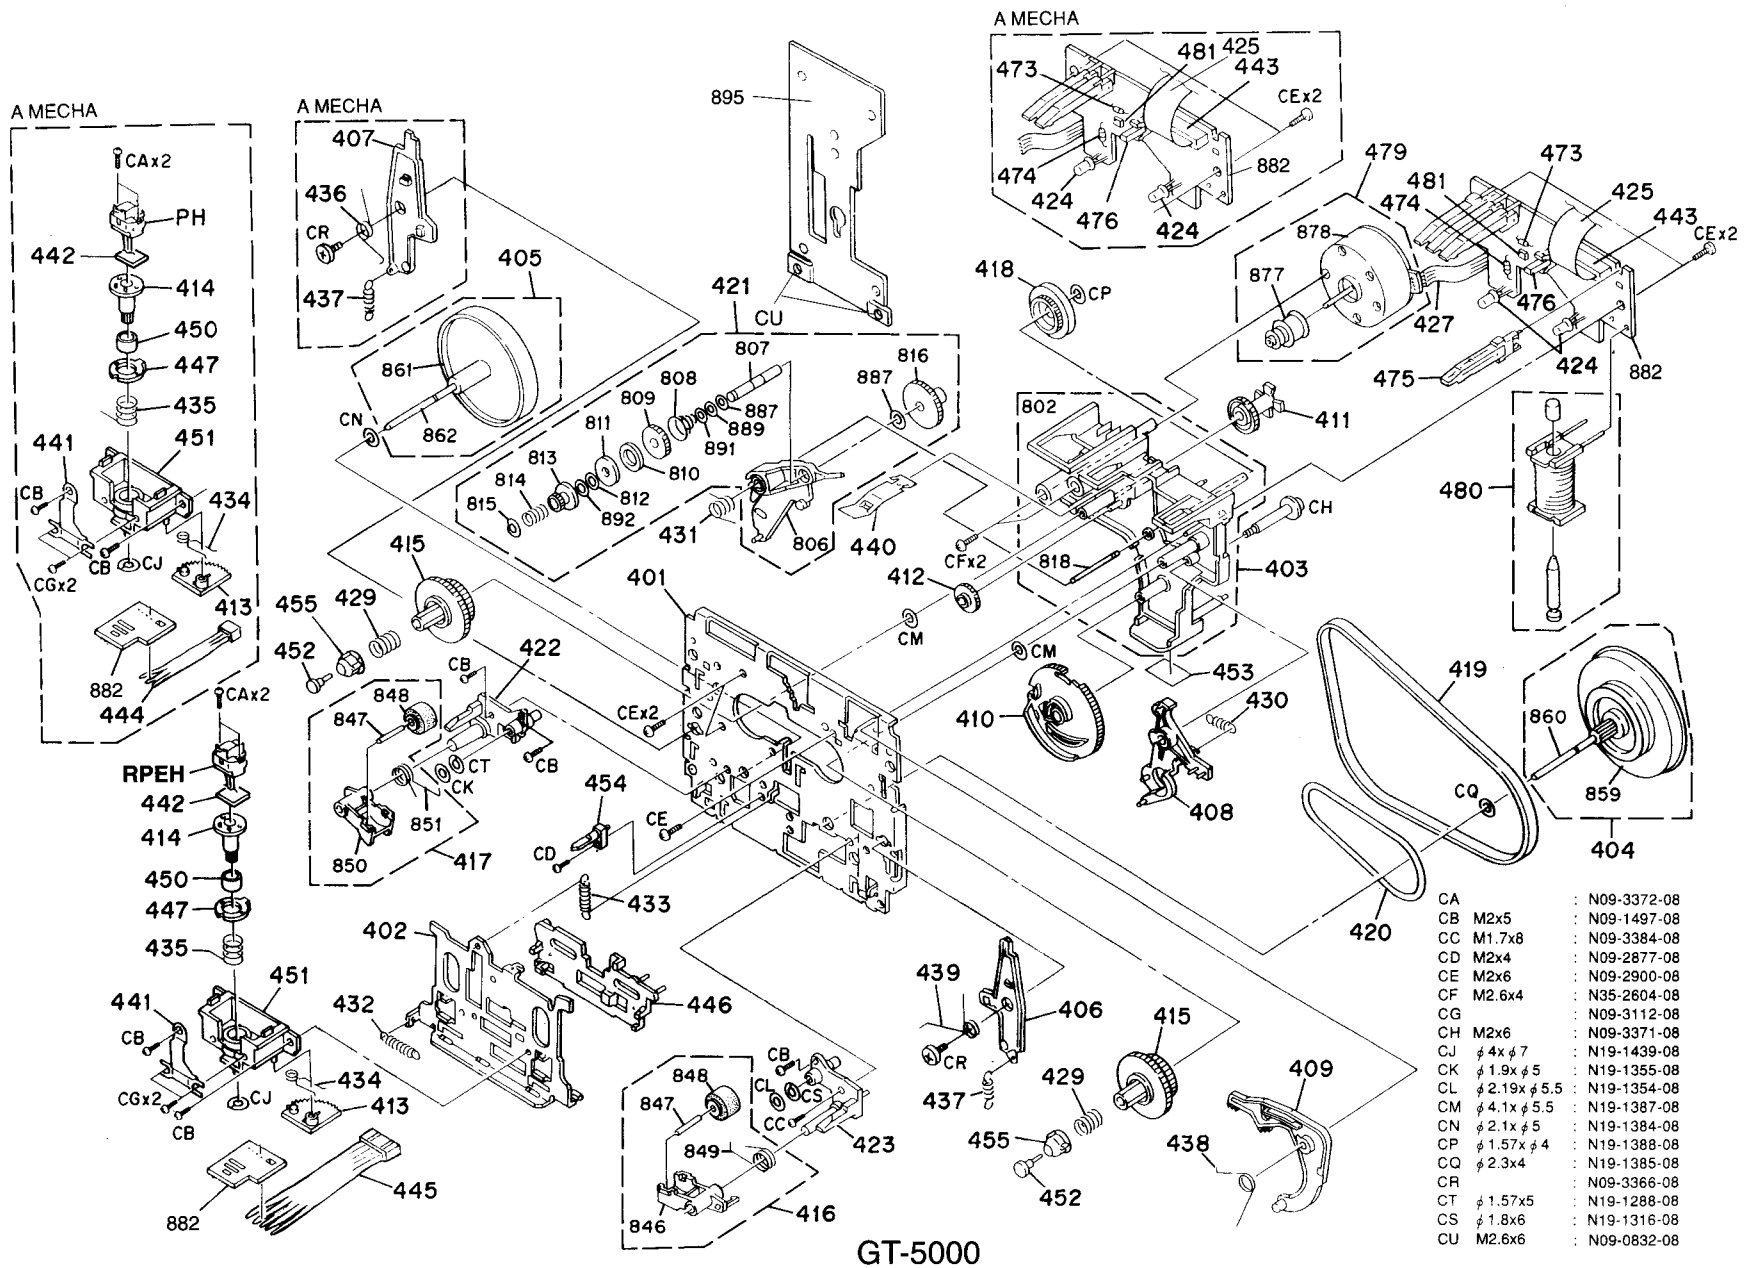

Parts with exploded numbers larger than 700 are not supplied.

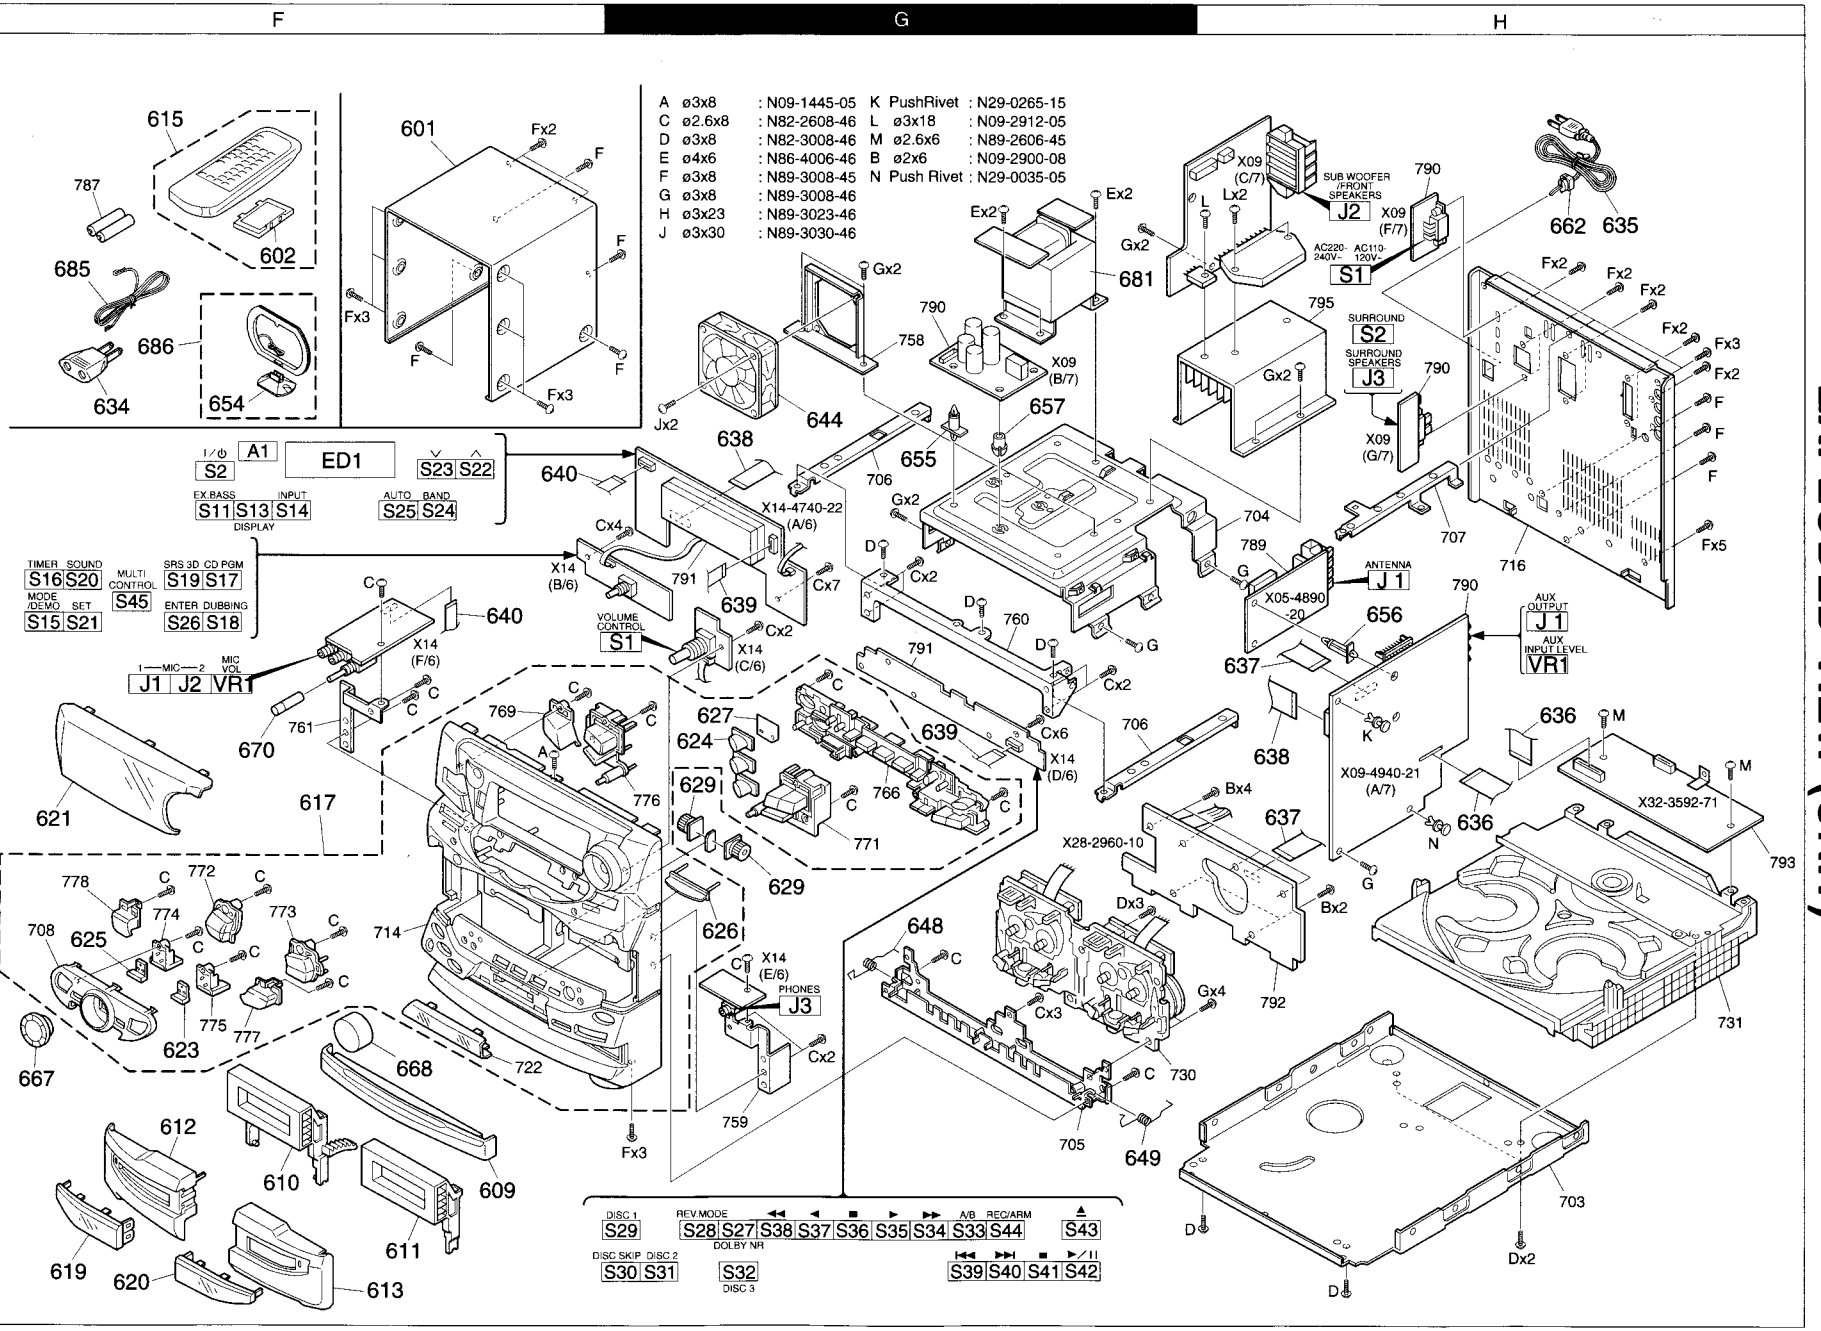

Parts with exploded numbers larger than 700 are not supplied.

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

❶

Ref. No	Address	New Parts	Parts No.	Description	Destination	Remarks
RXD-551/551E/551W/571S/A5						
601	1F	*	A01-3550-11	METALLIC CABINET		
602	1F	*	A09-0399-08	BATTERY COVER		
609	2F	*	A29-0896-12	PANEL		
610	2F	*	A53-2034-12	CASSETTE HOLDER		
611	2F	*	A53-2035-12	CASSETTE HOLDER		
612	2F	*	A53-2036-12	CASSETTE LID		
613	2F	*	A53-2037-12	CASSETTE LID		
615	1F	*	A70-1201-05	REMOTE CONTROLLER ASSY	KPY	
615	1F	*	A70-1201-05	REMOTE CONTROLLER ASSY	MXM2	
615	1F	*	A70-1202-05	REMOTE CONTROLLER ASSY	TEQE2	
617	2F	*	A60-1395-11	PANEL ASSY	YMXM2	
617	2F	*	A60-1396-11	PANEL ASSY	TEQE2	
617	2F	*	A60-1405-11	PANEL ASSY	KP	
619	2F	*	B10-2446-13	FRONT GLASS		
620	2F	*	B10-2447-13	FRONT GLASS		
621	2F	*	B10-2459-12	FRONT GLASS	TEQE2	
621	2F	*	B10-2474-12	FRONT GLASS	YMX	
621	2F	*	B10-2475-12	FRONT GLASS	KP	
621	2F	*	B10-2476-12	FRONT GLASS	M2	
623	2F	*	B19-1586-04	LIGHTING BOARD		
624	1G,2G	*	B19-1587-03	LIGHTING BOARD		
625	2F	*	B19-1589-04	LIGHTING BOARD		
627	2G	*	B11-0374-04	SMOKED FILTER		
-			B46-0096-53	WARRANTY CARD	X	
-			B46-0310-03	WARRANTY CARD	E2	
-			B46-0310-03	WARRANTY CARD	TEQE2	
-			B46-0328-03	WARRANTY CARD	KY	
-			B46-0336-03	WARRANTY CARD	P	
-			B58-0513-04	CAUTION CARD (PRESET220-240)	Y	
-			B58-0964-13	CAUTION CARD (UL)	KY	
-			B58-0965-13	CAUTION CARD (T,XtypePL)	XT	
-			B58-0966-13	CAUTION CARD (ELMtypePL)	MEM2	
-			B58-0967-03	CAUTION CARD (PtypePL)	P	
-			B58-1526-03	CAUTION CARD (P4,ORI,A4,1(Q)	Q	
-			B58-1569-04	CAUTION CARD		
-			B58-1607-03	CAUTION CARD	E2	
-			B59-1104-00	SERVICE DIRECTORY	Y	
-		*	B60-3768-00	INSTRUCTION MANUAL(ENGLISH)	TQM2E2	
-		*	B60-3768-00	INSTRUCTION MANUAL(ENGLISH)	YMX	
-		*	B60-3771-00	INSTRUCTION MANUAL(SPANISH)	ME	
-		*	B60-3774-00	INSTRUCTION MANUAL(TAIWANESE)	M	
-		*	B60-3776-00	INSTRUCTION MANUAL(FRENCH)	PE	
-		*	B60-3777-00	INSTRUCTION MANUAL(GERMAN)	E	
-		*	B60-3778-00	INSTRUCTION MANUAL(DUTCH)	E	
-		*	B60-3779-00	INSTRUCTION MANUAL(ITALIAN)	E	
-		*	B60-3780-00	INSTRUCTION MANUAL(PH)	E2	
-		*	B60-3781-00	INSTRUCTION MANUAL(R)	Q	
-		*	B60-3782-00	INSTRUCTION MANUAL(ENGLISH)	KP	
-		*	B60-3831-00	INSTRUCTION MANUAL(HG)	E2	
-		*	B60-3832-00	INSTRUCTION MANUAL(CZ)	E2	
629	2G	*	D39-0334-05	DAMPER		

L: Scandinavia **K**: USA **P**: Canada **R**: Mexico **C**: China **I**: Malaysia
Y: PX(Far East, Hawaii) **T**: Europe **E**: Europe **G**: Germany **V**: China (Shanghai)
Y: AAFES(Europe) **X**: Australia **Q**: Russia **H**: Korea **M**: Other Areas

⚠ indicates safety critical components.

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

❷

Ref. No	Address	New Parts	Parts No.	Description	Destination	Remarks
⚠ 634	1F		E03-0115-05	AC PLUG ADAPTER	MM2	
⚠ 635	1H		E30-2592-15	AC POWER CORD	MEQ	
⚠ 635	1H		E30-2592-15	AC POWER CORD	M2E2	
⚠ 635	1H		E30-2605-05	AC POWER CORD	Y	
⚠ 635	1H		E30-2650-05	AC POWER CORD	KP	
⚠ 635	1H		E30-2717-05	AC POWER CORD	X	
⚠ 635	1H		E30-2829-05	AC POWER CORD	T	
636	2H	*	E35-2136-05	FLAT CABLE(25P)		
637	1H,2H	*	E35-2137-05	FLAT CABLE(17P)		
638	2H	*	E35-2138-15	FLAT CABLE(19P)		
639	1G,2G	*	E35-2147-05	FLAT CABLE(7P)		
640	1F	*	E35-2194-05	FLAT CABLE	YMXM2	
644	1G	*	F09-0137-05	FAN		
648	2G	*	G01-4042-04	TORSION COIL SPRING		
649	2G	*	G01-4043-04	TORSION COIL SPRING		
-			G10-0452-04	NON-WOVEN FABRIC		
-			G11-0155-14	SOFT TAPE (40X9X2)		
-			G11-2345-04	CUSHION		
-		*	H10-7435-12	POLYSTYRENE FOAMED FIXTURE	EQM2E2	
-		*	H10-7435-12	POLYSTYRENE FOAMED FIXTURE	KPYMXT	
-		*	H10-7436-12	POLYSTYRENE FOAMED FIXTURE	EQM2E2	
-		*	H10-7436-12	POLYSTYRENE FOAMED FIXTURE	KPYMXT	
-			H13-0086-04	CARTON BOARD		
-			H25-0632-24	PROTECTION BAG	KPYMXE	
-			H25-0632-24	PROTECTION BAG	QM2E2	
-			H25-0644-04	PROTECTION BAG (0632 PRINT)	T	
-			H25-1536-04	PROTECTION BAG	KPXY	
-			H25-1536-04	PROTECTION BAG	TEQE2	
-			H25-1611-04	PROTECTION BAG	MM2	
-		*	H50-2891-04	ITEM CARTON CASE	YX	
-		*	H50-2892-04	ITEM CARTON CASE	KP	
-		*	H50-2893-04	ITEM CARTON CASE	TE	
-		*	H50-2894-04	ITEM CARTON CASE	M	
-		*	H50-2895-04	ITEM CARTON CASE	E2	
-		*	H50-2917-04	ITEM CARTON CASE	Q	
-		*	H50-2918-04	ITEM CARTON CASE	M2	
654	1F		J19-3645-05	ANTENNA STAND		
655	1G		J19-3327-05	UNIT HOLDER		
656	1H		J19-3329-05	UNIT HOLDER		
657	1G		J19-3752-14	UNIT HOLDER		
⚠ 662	2H		J42-0083-05	POWER CORD BUSHING		
-			J52-0039-05	PUSH LATCH		
-			J61-0307-05	WIRE BAND		
667	1F	*	K29-6925-04	KNOB (JOG)		
668	2F	*	K29-6923-04	KNOB (MULTI CONTROL VOLUME)		
670	2F	*	K29-6926-04	KNOB (MIC VOLUME)	YMXM2	
681	1G	*	L07-2522-05	POWER TRANSFORMER	KP	
⚠ 681	1G	*	L07-2523-05	POWER TRANSFORMER	YMM2	
⚠ 681	1G	*	L07-2525-05	POWER TRANSFORMER	X	
⚠ 681	1G	*	L07-2526-05	POWER TRANSFORMER	TEE2	
⚠ 681	1G	*	L07-2527-05	POWER TRANSFORMER	Q	
685	1F		T90-0801-05	LEAD WIRE ANTENNA	KPXY	

L: Scandinavia **K**: USA **P**: Canada **R**: Mexico **C**: China **I**: Malaysia
Y: PX(Far East, Hawaii) **T**: Europe **E**: Europe **G**: Germany **V**: China (Shanghai)
Y: AAFES(Europe) **X**: Australia **Q**: Russia **H**: Korea **M**: Other Areas

⚠ indicates safety critical components.

✻ New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

❸

Ref. No	Address	New Parts	Parts No.	Description	Destination	Remarks
685	1F		T90-0801-05	LEAD WIRE ANTENNA	MM2	
685	1F		T90-0836-05	LEAD WIRE ANTENNA	TEQE2	
686	1F		T90-0833-05	LOOP ANTENNA		
				RXD-751/751E/751W/771S/A8		
601	1F		A01-3550-11	METALLIC CABINET		
602	2F		A09-0399-08	BATTERY COVER		
609	2F		A29-0896-12	PANEL(CD)		
610	2F		A53-2034-12	CASSETTE HOLDER(L)		
611	2F		A53-2035-12	CASSETTE HOLDER(R)		
612	2F		A53-2036-12	CASSETTE LID(L)		
613	2F		A53-2037-12	CASSETTE LID(R)		
615	1F		A70-1201-05	REMOTE CONTROLLER ASSY	KPY	
615	1F		A70-1201-05	REMOTE CONTROLLER ASSY	MXM2	
615	1F		A70-1202-05	REMOTE CONTROLLER ASSY	TEQE2	
617	2F	✻	A60-1391-11	PANEL ASSY	YMXM2	
617	2F	✻	A60-1392-11	PANEL ASSY	TEQE2	
617	2F	✻	A60-1409-11	PANEL ASSY	KP	
619	2F		B10-2446-13	FRONT GLASS(L)		
620	2F		B10-2447-13	FRONT GLASS(R)		
621	2F	✻	B10-2445-12	FRONT GLASS	YMX	
621	2F	✻	B10-2479-12	FRONT GLASS	KP	
621	2F	✻	B10-2480-12	FRONT GLASS	TEQE2	
621	2F	✻	B10-2481-12	FRONT GLASS	M2	
623	2F		B19-1586-04	LIGHTING BOARD (SRS 3D)		
624	2G		B19-1587-03	LIGHTING BOARD (DISC1,2,3)		
625	2F		B19-1589-04	LIGHTING BOARD (SOUND)		
626	2G		B19-1588-04	LIGHTING BOARD		
627	2G		B11-0374-04	SMOKED FILTER		
-			B46-0096-53	WARRANTY CARD	X	
-			B46-0310-03	WARRANTY CARD	E2	
-			B46-0310-03	WARRANTY CARD	TEQ	
-			B46-0328-03	WARRANTY CARD	KY	
-			B46-0336-03	WARRANTY CARD	P	
-			B58-0513-04	CAUTION CARD (PRESET220-240)	Y	
-			B58-0964-13	CAUTION CARD (UL)	KY	
-			B58-0965-13	CAUTION CARD (T,XtypePL)	XT	
-			B58-0966-13	CAUTION CARD (ELMtypePL)	E2	
-			B58-0966-13	CAUTION CARD (ELMtypePL)	MEM2	
-			B58-0967-03	CAUTION CARD (PtypePL)	P	
-			B58-1526-03	CAUTION CARD (P4,ORI,A4,1(Q)	Q	
-			B58-1569-04	CAUTION CARD		
-			B58-1607-03	CAUTION CARD	E2	
-			B59-1104-00	SERVICE DIRECTORY	Y	
-			B60-3768-00	INSTRUCTION MANUAL(ENGLISH)	TQM2E2	
-			B60-3768-00	INSTRUCTION MANUAL(ENGLISH)	YMX	
-			B60-3771-00	INSTRUCTION MANUAL(SPANISH)	ME	
-			B60-3774-00	INSTRUCTION MANUAL(TAIWANESE)	M	
-			B60-3776-00	INSTRUCTION MANUAL(FRENCH)	PE	
-			B60-3777-00	INSTRUCTION MANUAL(GERMAN)	E	
-			B60-3778-00	INSTRUCTION MANUAL(DUTCH)	E	
-			B60-3779-00	INSTRUCTION MANUAL(ITALIAN)	E	
-			B60-3780-00	INSTRUCTION MANUAL(PH)	E2	
-			B60-3781-00	INSTRUCTION MANUAL(R)	Q	
-			B60-3782-00	INSTRUCTION MANUAL(ENGLISH)	KP	

L : Scandinavia **K** : USA **P** : Canada **R** : Mexico **C** : China **I** : Malaysia
Y : PX(Far East, Hawaii) **T** : Europe **E** : Europe **G** : Germany **V** : China (Shanghai)
Y : AAFES(Europe) **X** : Australia **Q** : Russia **H** : Korea **M** : Other Areas

⚠ indicates safety critical components.

✻ New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

❹

Ref. No	Address	New Parts	Parts No.	Description	Destination	Remarks
-			B60-3831-00	INSTRUCTION MANUAL(HG)	E2	
-			B60-3832-00	INSTRUCTION MANUAL(CZ)	E2	
629	2G		D39-0334-05	DAMPER		
⚠ 634	1F		E03-0115-05	AC PLUG ADAPTER	MM2	
⚠ 635	1H		E30-2592-15	AC POWER CORD	MEQ	
⚠ 635	1H		E30-2592-15	AC POWER CORD	M2E2	
⚠ 635	1H		E30-2605-05	AC POWER CORD	Y	
⚠ 635	1H		E30-2650-05	AC POWER CORD	KP	
⚠ 635	1H		E30-2717-05	AC POWER CORD	X	
⚠ 635	1H		E30-2829-05	AC POWER CORD	T	
636	2H		E35-2136-05	FLAT CABLE(25P)		
637	1H,2H		E35-2137-05	FLAT CABLE(17P)		
638	2H		E35-2138-15	FLAT CABLE(19P)		
639	1G,2G		E35-2139-05	FLAT CABLE(11P)		
640	1F		E35-2194-05	FLAT CABLE	YMXM2	
644	1G		F09-0137-05	FAN		
648	2G		G01-4042-04	TORSION COIL SPRING		
649	2F		G01-4043-04	TORSION COIL SPRING		
-			G10-0452-04	NON-WOVEN FABRIC		
-			G11-0155-14	SOFT TAPE (40X9X2)		
-			G11-2345-04	CUSHION		
			H13-0086-04	CARTON BOARD		
-			H10-7435-12	POLYSTYRENE FOAMED FIXTURE	EQM2E2	
-			H10-7435-12	POLYSTYRENE FOAMED FIXTURE	KPYMXT	
-			H10-7436-12	POLYSTYRENE FOAMED FIXTURE	EQM2E2	
-			H10-7436-12	POLYSTYRENE FOAMED FIXTURE	KPYMXT	
-			H25-0632-24	PROTECTION BAG	KPYMXE	
-			H25-0632-24	PROTECTION BAG	QM2E2	
-			H25-0644-04	PROTECTION BAG (0632 PRINT)	T	
-			H25-1536-04	PROTECTION BAG	KPXY	
-			H25-1536-04	PROTECTION BAG	TEQE2	
-			H25-1611-04	PROTECTION BAG	MM22	
-			H50-2787-04	ITEM CARTON CASE	KP	
-		✻	H50-2788-04	ITEM CARTON CASE	YX	
-			H50-2789-04	ITEM CARTON CASE	TE	
-		✻	H50-2887-04	ITEM CARTON CASE	M	
-		✻	H50-2888-04	ITEM CARTON CASE	E2	
-		✻	H50-2919-04	ITEM CARTON CASE	Q	
-		✻	H50-2920-04	ITEM CARTON CASE	M2	
654	1F		J19-3645-05	ANTENNA STAND		
655	1G		J19-3327-05	UNIT HOLDER		
656	1H		J19-3329-05	UNIT HOLDER		
657	1G		J19-3752-14	UNIT HOLDER		
⚠ 662	2H		J42-0083-05	POWER CORD BUSHING		
-			J52-0039-05	PUSH LATCH		
-			J61-0307-05	WIRE BAND		
667	1F		K29-6925-04	KNOB(JOG)		
668	2F		K29-6923-04	KNOB(MULTI CONTROL VOLUME)		
670	2F		K29-6926-04	KNOB(MIC VOLUME)	M2	
670	2F		K29-6926-04	KNOB(MIC VOLUME)	YMXTEQ	
681	1G		L07-2528-05	POWER TRANSFORMER	KP	

L : Scandinavia **K** : USA **P** : Canada **R** : Mexico **C** : China **I** : Malaysia
Y : PX(Far East, Hawaii) **T** : Europe **E** : Europe **G** : Germany **V** : China (Shanghai)
Y : AAFES(Europe) **X** : Australia **Q** : Russia **H** : Korea **M** : Other Areas

⚠ indicates safety critical components.

✻ New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

5

Ref. No	Address	New Parts	Parts No.	Description	Destination	Remarks
681	1G		L07-2529-05	POWER TRANSFORMER	YMM2	
⚠ 681	1G		L07-2531-05	POWER TRANSFORMER	X	
⚠ 681	1G		L07-2532-05	POWER TRANSFORMER	TEE2	
⚠ 681	1G		L07-2533-05	POWER TRANSFORMER	Q	
685	1G		T90-0801-05	LEAD WIRE ANTENNA	KPXY	
685	1G		T90-0801-05	LEAD WIRE ANTENNA	MM2	
685	1G		T90-0836-05	LEAD WIRE ANTENNA	TEQE2	
686	1G		T90-0833-05	LOOP ANTENNA		
RXD-501/501E/501W						
601	1F	✻	A01-3563-11	METALLIC CABINET		
602	1F	✻	A09-0399-08	BATTERY COVER		
609	2F	✻	A29-0899-12	PANEL(CD)		
610	2F	✻	A53-2034-12	CASSETTE HOLDER(L)		
611	2F	✻	A53-2035-12	CASSETTE HOLDER(R)		
612	2F	✻	A53-2044-12	CASSETTE LID(L)		
613	2F	✻	A53-2045-12	CASSETTE LID(R)		
615	1F	✻	A70-1201-05	REMOTE CONTROLLER ASSY	X	
615	1F	✻	A70-1202-05	REMOTE CONTROLLER ASSY	EQTE2	
617	2F	✻	A60-1393-11	PANEL ASSY	EQTE2	
617	2F	✻	A60-1402-11	PANEL ASSY	X	
619	2F	✻	B10-2446-13	FRONT GLASS(L)		
619	2F	✻	B10-2447-13	FRONT GLASS(R)		
619	2F	✻	B10-2472-12	FRONT GLASS	X	
619	2F	✻	B10-2473-12	FRONT GLASS	EQTE2	
619	2F	✻	B10-2473-12	FRONT GLASS	E2	
623	2F	✻	B19-1586-04	LIGHTING BOARD(CD)		
624	2G	✻	B19-1587-03	LIGHTING BOARD(DISC1,2,3)		
625	2F	✻	B19-1589-04	LIGHTING BOARD(SOUND)		
627	2G	✻	B11-0374-04	SMOKED FILTER		
-			B46-0096-53	WARRANTY CARD	X	
-			B46-0310-03	WARRANTY CARD	EQTE2	
-			B58-0965-13	CAUTION CARD (T,XtypePL)	XT	
-			B58-0966-13	CAUTION CARD (ELMtypePL)	EE2	
-		✻	B58-1526-03	CAUTION CARD (P4,ORI,A4,1(Q)	Q	
-		✻	B58-1569-04	CAUTION CARD		
-		✻	B58-1607-03	CAUTION CARD	E	
-		✻	B60-3768-00	INSTRUCTION MANUAL(ENGLISH)	QXTE2	
-		✻	B60-3771-00	INSTRUCTION MANUAL(SPANISH)	E	
-		✻	B60-3776-00	INSTRUCTION MANUAL(FRENCH)	E	
-		✻	B60-3777-00	INSTRUCTION MANUAL(GERMAN)	E	
-		✻	B60-3778-00	INSTRUCTION MANUAL(DUTCH)	E	
-		✻	B60-3779-00	INSTRUCTION MANUAL(ITALIAN)	E	
-		✻	B60-3780-00	INSTRUCTION MANUAL(PH)	E2	
-		✻	B60-3781-00	INSTRUCTION MANUAL(R)	E2	
-		✻	B60-3831-00	INSTRUCTION MANUAL(HG)	E2	
-		✻	B60-3832-00	INSTRUCTION MANUAL(CZ)	E2	
629	2G		D39-0334-05	DAMPER		
⚠ 635	1H		E30-2592-15	AC POWER CORD	EQE2	
⚠ 635	1H		E30-2717-05	AC POWER CORD	X	
⚠ 635	1H		E30-2829-05	AC POWER CORD	T	
636	2H	✻	E30-2136-05	FLAT CABLE(25P)		
637	1H,2H	✻	E35-2137-05	FLAT CABLE(17P)		

L: Scandinavia **K**: USA **P**: Canada **R**: Mexico **C**: China **I**: Malaysia
Y: PX(Far East, Hawaii) **T**: Europe **E**: Europe **G**: Germany **V**: China (Shanghai)
Y: AAFES(Europe) **X**: Australia **Q**: Russia **H**: Korea **M**: Other Areas

⚠ indicates safety critical components.

✻ New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

6

Ref. No	Address	New Parts	Parts No.	Description	Destination	Remarks
638	2H	✻	E35-2138-15	FLAT CABLE(19P)		
639	1G,2G	✻	E35-2147-05	FLAT CABLE(7P)		
640	1F	✻	E35-2194-05	FLAT CABLE	X	
644	1G	✻	F09-0137-05	FAN		
648	2G	✻	G01-4042-04	TORSION COIL SPRING(A)		
649	2G	✻	G01-4043-04	TORSION COIL SPRING(B)		
-			G10-0452-04	NON-WOVEN FABRIC		
-			G11-0155-14	SOFT TAPE (40X9X2)		
-			G11-2345-04	CUSHION		
-		✻	H10-7435-12	POLYSTYRENE FOAMED FIXTURE(L)		
-		✻	H10-7436-12	POLYSTYRENE FOAMED FIXTURE(R)		
-			H13-0086-04	CARTON BOARD		
-			H25-0632-24	PROTECTION BAG	EQXE2	
-			H25-0644-04	PROTECTION BAG (0632 PRINT)	T	
-			H25-1536-04	PROTECTION BAG		
-		✻	H50-2896-04	ITEM CARTON CASE	X	
-		✻	H50-2897-04	ITEM CARTON CASE	ET	
-		✻	H50-2898-04	ITEM CARTON CASE	E2	
-		✻	H50-2923-04	ITEM CARTON CASE	Q	
654	1F		J19-3645-05	ANTENNA STAND		
655	1G		J19-3327-05	UNIT HOLDER		
656	1H		J19-3329-05	UNIT HOLDER		
657	1G		J19-3752-14	UNIT HOLDER		
⚠ 662	1H		J42-0083-05	POWER CORD BUSHING		
-			J61-0307-05	WIRE BAND		
667	1F	✻	K29-6925-04	KNOB(JOG)		
668	2F	✻	K29-6950-04	KNOB(MULTI CONTROL VOLUME)		
670	2F	✻	K29-6953-04	KNOB(MIC)	X	
⚠ 681	1G	✻	L07-2525-05	POWER TRANSFORMER	X	
⚠ 681	1G	✻	L07-2526-05	POWER TRANSFORMER	ETE2	
⚠ 681	1G	✻	L07-2527-05	POWER TRANSFORMER	Q	
685	1G		T90-0801-05	LEAD WIRE ANTENNA	X	
685	1G		T90-0836-05	LEAD WIRE ANTENNA	EQTE2	
686	1G		T90-0833-05	LOOP ANTENNA		
RXD-701/701E/701W						
601	1F	✻	A01-3563-11	METALLIC CABINET		
602	1F	✻	A09-0399-08	BATTERY COVER		
609	2F	✻	A29-0899-12	PANEL		
610	2F	✻	A53-2034-12	CASSETTE HOLDER(L)		
611	2F	✻	A53-2035-12	CASSETTE HOLDER(R)		
612	2F	✻	A53-2044-12	CASSETTE LID(L)		
613	2F	✻	A53-2045-12	CASSETTE LID(R)		
615	1F	✻	A70-1201-05	REMOTE CONTROLLER ASSY	X	
615	1F	✻	A70-1202-05	REMOTE CONTROLLER ASSY	EQTE2	
617	2F	✻	A60-1394-11	PANEL ASSY	EQTE2	
617	2F	✻	A60-1408-11	PANEL ASSY	X	
619	2F	✻	B10-2446-13	FRONT GLASS		
620	2F	✻	B10-2447-13	FRONT GLASS		
621	2F	✻	B10-2458-12	FRONT GLASS	X	
621	2F	✻	B10-2478-12	FRONT GLASS	EQT	
623	2F	✻	B19-1586-04	LIGHTING BOARD		

L: Scandinavia **K**: USA **P**: Canada **R**: Mexico **C**: China **I**: Malaysia
Y: PX(Far East, Hawaii) **T**: Europe **E**: Europe **G**: Germany **V**: China (Shanghai)
Y: AAFES(Europe) **X**: Australia **Q**: Russia **H**: Korea **M**: Other Areas

⚠ indicates safety critical components.

✻ New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

❼

Ref. No	Address	New Parts	Parts No.	Description	Destination	Remarks
624	2G	✻	B19-1587-03	LIGHTING BOARD		
625	2F	✻	B19-1589-04	LIGHTING BOARD		
626	2G	✻	B19-1588-04	LIGHTING BOARD		
627	2G	✻	B11-0374-04	SMOKED FILTER		
-		✻	B46-0096-53	WARRANTY CARD	X	
-		✻	B46-0310-03	WARRANTY CARD	EQTE2	
-		✻	B58-0965-13	CAUTION CARD (T,XtypePL)	TX	
-		✻	B58-0966-13	CAUTION CARD (ELMtypePL)	EE2	
-		✻	B58-1526-03	CAUTION CARD (P4,ORI,A4,1(Q)	Q	
-		✻	B58-1569-04	CAUTION CARD		
-		✻	B58-1607-03	CAUTION CARD	E2	
-		✻	B60-3768-00	INSTRUCTION MANUAL(ENGLISH)	QTXE2	
-		✻	B60-3771-00	INSTRUCTION MANUAL(SPANISH)	E	
-		✻	B60-3776-00	INSTRUCTION MANUAL(FRENCH)	E	
-		✻	B60-3777-00	INSTRUCTION MANUAL(GERMAN)	E	
-		✻	B60-3778-00	INSTRUCTION MANUAL(DUTCH)	E	
-		✻	B60-3779-00	INSTRUCTION MANUAL(ITALIAN)	E	
-		✻	B60-3780-00	INSTRUCTION MANUAL(PH)	E2	
-		✻	B60-3781-00	INSTRUCTION MANUAL(R)	Q	
-		✻	B60-3831-00	INSTRUCTION MANUAL(HG)	E2	
-		✻	B60-3832-00	INSTRUCTION MANUAL(CZ)	E2	
629	2G		D39-0334-05	DAMPER		
⚠ 635	1H		E30-2592-15	AC POWER CORD	EQE2	
⚠ 635	1H		E30-2717-05	AC POWER CORD	X	
⚠ 635	1H		E30-2829-05	AC POWER CORD	T	
636	2H	✻	E35-2136-05	FLAT CABLE		
637	1H,2H	✻	E35-2137-05	FLAT CABLE		
638	2H	✻	E35-2138-15	FLAT CABLE		
639	1G,2G	✻	E35-2139-05	FLAT CABLE(11P)		
640	1F	✻	E35-2194-05	FLAT CABLE	X1	
644	1G	✻	F09-0137-05	FAN		
648	2G	✻	G01-4042-04	TORSION COIL SPRING		
649	2G	✻	G01-4043-04	TORSION COIL SPRING		
-			G10-0452-04	NON-WOVEN FABRIC		
-			G11-0155-14	SOFT TAPE (40X9X2)		
-			G11-2345-04	CUSHION		
-		✻	H10-7435-12	POLYSTYRENE FOAMED FIXTURE(L)		
-		✻	H10-7436-12	POLYSTYRENE FOAMED FIXTURE(R)		
-			H13-0086-04	CARTON BOARD		
-			H25-0632-24	PROTECTION BAG	EQXE2	
-			H25-0644-04	PROTECTION BAG (0632 PRINT)	T	
-			H25-1536-04	PROTECTION BAG		
-		✻	H50-2889-04	ITEM CARTON CASE	X	
-		✻	H50-2890-04	ITEM CARTON CASE	ET	
-		✻	H50-2909-04	ITEM CARTON CASE	E2	
-		✻	H50-2910-04	ITEM CARTON CASE	Q	
654	1F		J19-3645-05	ANTENNA STAND		
655	1G		J19-3327-05	UNIT HOLDER		
656	1H		J19-3329-05	UNIT HOLDER		
657	1G		J19-3752-14	UNIT HOLDER		
⚠ 662	2H		J42-0083-05	POWER CORD BUSHING		
-			J52-0039-05	PUSH LATCH		

L: Scandinavia **K**: USA **P**: Canada **R**: Mexico **C**: China **I**: Malaysia
Y: PX(Far East, Hawaii) **T**: Europe **E**: Europe **G**: Germany **V**: China (Shanghai)
Y: AAFES(Europe) **X**: Australia **Q**: Russia **H**: Korea **M**: Other Areas

⚠ indicates safety critical components.

✻ New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

❽

Ref. No	Address	New Parts	Parts No.	Description	Destination	Remarks
-			J61-0307-05	WIRE BAND		
667	1F	✻	K29-6925-04	KNOB(JOG)		
668	2F	✻	K29-6950-04	KNOB(MULTI CONTROL VOLUME)		
670	2F	✻	K29-6953-04	KNOB(MIC)	X	
681	1G	✻	L07-2531-05	POWER TRANSFORMER	X	
681	1G	✻	L07-2532-05	POWER TRANSFORMER	ETE2	
681	1G		L07-2533-05	POWER TRANSFORMER	Q	
685	1G		T90-0801-05	LEAD WIRE ANTENNA	X	
685	1G		T90-0836-05	LEAD WIRE ANTENNA	EQTE2	
686	1G		T90-0833-05	LOOP ANTENNA		

MPX UNIT (X04-1313-80) : Q only

C1			CE04LW1H010M	ELECTRO	1.0UF	50WV	
C2 ,3		✻	C91-1566-05	PF-C	0.01UF	G	
C4			CE04LW1A470M	ELECTRO	47UF	10WV	
C5 ,6			CQ93FMG1H102J	MYLAR	1000PF	J	
C7			CC45FSL1H331J	CERAMIC	330PF	J	
C8			CK45FB1H102K	CERAMIC	1000PF	K	
C9			CC93FCH1H471J	CERAMIC	470PF	J	
C10 ,11			CE04LW1HR47M	ELECTRO	0.47UF	50WV	
C12			CK45FF1H473Z	CERAMIC	0.047UF	Z	
C13 -15			CE04LW1H010M	ELECTRO	1.0UF	50WV	
C16			CK45FF1H103Z	CERAMIC	0.010UF	Z	
C17 ,18			CE04LW1H2R2M	ELECTRO	2.2UF	50WV	
C19 ,20			CQ93FMG1H682J	MYLAR	6800PF	J	
C21			CK45FF1H103Z	CERAMIC	0.010UF	Z	
C22			CE04LW1A470M	ELECTRO	47UF	10WV	
C23 ,24			CQ93FMG1H472J	MYLAR	4700PF	J	
C25			CC45FSL1H121J	CERAMIC	120PF	J	
C26			CE04LW1H2R2M	ELECTRO	2.2UF	50WV	
TC1		✻	C05-0463-05	CERAMIC TRIMMER CAPACITOR(120P			
CN1		✻	E40-8288-05	FLAT CABLE CONNECTOR			
CN2 ,3			E40-4871-05	PIN ASSY			
CN6		✻	E40-4872-05	PIN ASSY			
L1		✻	L39-1350-05	PEAKING COIL			
L2 ,3			L79-1236-05	LC FILTER			
L4			L40-1021-14	SMALL FIXED INDUCTOR(1.0MH,K)			
⚠ R9			RS14KB3A221J	FL-PROOF RS	220	J	1W
VR1			R12-3685-05	TRIMMING POT.(10K)			
VR2			R12-1619-05	TRIMMING POT.(4.7K)			
D1			HZS5.1N(B2)	ZENER DIODE			
D1			MTZJ5.1(B)	ZENER DIODE			
D2 ,3			HSS104	DIODE			
D2 ,3			1SS133	DIODE			
D4			HZS5.1N(B2)	ZENER DIODE			
D4			MTZJ5.1(B)	ZENER DIODE			
D6 ,7			HSS104	DIODE			
D6 ,7			1SS133	DIODE			
IC1		✻	IR3R42	ANALOGUE IC			
IC2			NJM4565D	ANALOGUE IC			
IC3			TC4052BP	IC(4CH MPX/DE-MPX)			
Q1			2SA1175(F,E)	TRANSISTOR			
Q1			2SA933AS(Q,R)	TRANSISTOR			

L: Scandinavia **K**: USA **P**: Canada **R**: Mexico **C**: China **I**: Malaysia
Y: PX(Far East, Hawaii) **T**: Europe **E**: Europe **G**: Germany **V**: China (Shanghai)
Y: AAFES(Europe) **X**: Australia **Q**: Russia **H**: Korea **M**: Other Areas

⚠ indicates safety critical components.

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

Ref. No	Address	New Parts	Parts No.	Description			Destination	Remarks
Q5			DTC124ESA	DIGITAL TRANSISTOR				
Q5			UN4212	DIGITAL TRANSISTOR				
TUNER UNIT (X05-4710-21) : M2 only								
C1 ,2			CK73FB1H103K	CHIP C	0.010UF	K		
C3 -5			CK73FB1H473K	CHIP C	0.047UF	K		
C6			CE04LW1H220M	ELECTRO	22UF	50WV		
C7			CE04LW1H010M	ELECTRO	1.0UF	50WV		
C8			CE04LW1HR47M	ELECTRO	0.47UF	50WV		
C9			CE04LW1H010M	ELECTRO	1.0UF	50WV		
C10			CC73FCH1H470J	CHIP C	47PF	J		
C11			CE04LW1A221M	ELECTRO	220UF	10WV		
C12			CK73FB1H473K	CHIP C	0.047UF	K		
C13			CE04LW1H3R3M	ELECTRO	3.3UF	50WV		
C14			CK73FB1H473K	CHIP C	0.047UF	K		
C15			CE04LW1C330M	ELECTRO	33UF	16WV		
C16			CC73FSL1H821J	CHIP C	820PF	J		
C17 ,18			CE04LW1C100M	ELECTRO	10UF	16WV		
C19 ,20			CQ93FMG1H183J	MYLAR	0.018UF	J		
C21 ,22			CE04LW1H010M	ELECTRO	1.0UF	50WV		
C23 ,24			CQ93FMG1H682J	MYLAR	6800PF	J		
C25			CE04LW1H010M	ELECTRO	1.0UF	50WV		
C26			CK73FB1H103K	CHIP C	0.010UF	K		
C27			CE04LW1C470M	ELECTRO	47UF	16WV		
C28			CC73FCH1H040C	CHIP C	4.0PF	C		
C29 ,30			CK73FB1H103K	CHIP C	0.010UF	K		
C33		*	CC93FCH1H472J	CERAMIC	4700PF	J		
C34			CK73FB1H223K	CHIP C	0.022UF	K		
C35			CK73EB1H223K	CHIP C	0.022UF	K		
C37			CK73EF1C105Z	CHIP C	1.0UF	Z		
C38			CQ93FMG1H223J	MYLAR	0.022UF	J		
C39			CE04LW1H2R2M	ELECTRO	2.2UF	50WV		
C40			CE04LW1C470M	ELECTRO	47UF	16WV		
C41			CK73FB1H473K	CHIP C	0.047UF	K		
C42			CC73FCH1H120J	CHIP C	12PF	J		
C43			CC73FCH1H100D	CHIP C	10PF	D		
C44			CC73FSL1H471J	CHIP C	470PF	J		
C45			C91-0745-05	CERAMIC	100PF	K		
C46			CC73FSL1H471J	CHIP C	470PF	J		
C47			CC73FSL1H101J	CHIP C	100PF	J		
C48			CE04LW1C101M	ELECTRO	100UF	16WV		
C49			CE04HW1E100M	NP-ELEC	10UF	25WV		
C50			CK73FB1H473K	CHIP C	0.047UF	K		
C51			CQ93FMG1H333J	MYLAR	0.033UF	J		
C52 ,53			CK73FB1H223K	CHIP C	0.022UF	K		
C54			CK73FB1H103K	CHIP C	0.010UF	K		
C55			CK73FB1H223K	CHIP C	0.022UF	K		
C56			CC73FCH1H220J	CHIP C	22PF	J		
C57			C91-0757-05	CERAMIC	1000PF	K		
C58			CK73FF1E104Z	CHIP C	0.10UF	Z		
C59			CC73FSL1H101J	CHIP C	100PF	J		
C61			CE04LW1C470M	ELECTRO	47UF	16WV		
C62			CK73FB1H223K	CHIP C	0.022UF	K		
C63			CK73FB1H103K	CHIP C	0.010UF	K		
C64			CC73FCH1H220J	CHIP C	22PF	J		

L : Scandinavia **K** : USA **P** : Canada **R** : Mexico **C** : China **I** : Malaysia
Y : PX(Far East, Hawaii) **T** : Europe **E** : Europe **G** : Germany **V** : China (Shanghai)
Y : AAFES(Europe) **X** : Australia **Q** : Russia **H** : Korea **M** : Other Areas

⚠ indicates safety critical components.

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

Ref. No	Address	New Parts	Parts No.	Description				Destination	Remarks
C65			CK73FB1H103K	CHIP C	0.010UF	K			
C67			CC73FCH1H220J	CHIP C	22PF	J			
CN1			E40-8052-05	SOCKET FOR PIN ASSY					
CN2			E40-4871-05	PIN ASSY					
J1			E20-0476-05	LOCK TERMINAL BOARD(4P)					
J1			E70-0051-05	LOCK TERMINAL BOARD					
CF1 ,2		*	L72-0611-05	CERAMIC FILTER					
L1		*	L39-1372-05	COMBINATION COIL					
L2		*	L31-0627-05	SW-RF COIL					
L3		*	L32-0593-05	SW OSCILLATING COIL					
L4			L30-0911-05	AM IFT					
L5		*	L30-0933-05	FM IFT					
L6			L40-1021-14	SMALL FIXED INDUCTOR(1.0MH,K)					
L7			L40-1091-17	SMALL FIXED INDUCTOR(1UH)					
X1		*	L77-2232-05	CRYSTAL RESONATOR					
R1			RK73FB2A332J	CHIP R	3.3K	J	1/10W		
R2			RK73FB2A681J	CHIP R	680	J	1/10W		
R3			RK73FB2A220J	CHIP R	22	J	1/10W		
R4 ,5			RK73FB2A331J	CHIP R	330	J	1/10W		
R6 ,7			RK73FB2A101J	CHIP R	100	J	1/10W		
R8			RK73FB2A331J	CHIP R	330	J	1/10W		
R9			RK73FB2A472J	CHIP R	4.7K	J	1/10W		
R10			RK73FB2A302J	CHIP R	3.0K	J	1/10W		
R12			RK73FB2A472J	CHIP R	4.7K	J	1/10W		
R13			RK73FB2A473J	CHIP R	47K	J	1/10W		
R14			RK73FB2A912J	CHIP R	9.1K	J	1/10W		
R15			RK73FB2A332J	CHIP R	3.3K	J	1/10W		
R16			RK73FB2A472J	CHIP R	4.7K	J	1/10W		
R17 ,18			RK73FB2A183J	CHIP R	18K	J	1/10W		
R19 ,20			RK73FB2A332J	CHIP R	3.3K	J	1/10W		
R21 ,22			RK73FB2A393J	CHIP R	39K	J	1/10W		
R23 ,24			RK73FB2A561J	CHIP R	560	J	1/10W		
R27			RK73FB2A392J	CHIP R	3.9K	J	1/10W		
R28			RK73FB2A220J	CHIP R	22	J	1/10W		
⚠ R30			RS14KB3A680J	FL-PROOF RS	68	J	1W		
R32			RK73FB2A105J	CHIP R	1.0M	J	1/10W		
R33			RK73FB2A103J	CHIP R	10K	J	1/10W		
R34			RK73FB2A224J	CHIP R	220K	J	1/10W		
R35			RK73FB2A332J	CHIP R	3.3K	J	1/10W		
R36			RK73FB2A104J	CHIP R	100K	J	1/10W		
R37			RK73FB2A101J	CHIP R	100	J	1/10W		
R38			RK73FB2A105J	CHIP R	1.0M	J	1/10W		
R39			RK73FB2A104J	CHIP R	100K	J	1/10W		
R40			RK73EB2B103J	CHIP R	10K	J	1/8W		
R41			RK73FB2A224J	CHIP R	220K	J	1/10W		
R42			RK73FB2A105J	CHIP R	1.0M	J	1/10W		
R43			RK73FB2A122J	CHIP R	1.2K	J	1/10W		
R44			RK73FB2A123J	CHIP R	12K	J	1/10W		
R45			RK73FB2A122J	CHIP R	1.2K	J	1/10W		
R46			RK73FB2A123J	CHIP R	12K	J	1/10W		
R47			RK73FB2A105J	CHIP R	1.0M	J	1/10W		
R48			RK73FB2A104J	CHIP R	100K	J	1/10W		
R49			RK73EB2B221J	CHIP R	220	J	1/8W		
⚠ R50			RD14NB2E331J	RD	330	J	1/4W		

L : Scandinavia **K** : USA **P** : Canada **R** : Mexico **C** : China **I** : Malaysia
Y : PX(Far East, Hawaii) **T** : Europe **E** : Europe **G** : Germany **V** : China (Shanghai)
Y : AAFES(Europe) **X** : Australia **Q** : Russia **H** : Korea **M** : Other Areas

⚠ indicates safety critical components.

✻ New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

⑪

Ref. No	Address	New Parts	Parts No.	Description			Destination	Remarks
⚠ R51			RD14NB2E101J	RD 100	J	1/4W		
⚠ R52			RD14NB2E561J	RD 560	J	1/4W		
R54			RK73FB2A222J	CHIP R 2.2K	J	1/10W		
R55			RK73FB2A102J	CHIP R 1.0K	J	1/10W		
R56			RK73FB2A103J	CHIP R 10K	J	1/10W		
R57 -62			RK73FB2A102J	CHIP R 1.0K	J	1/10W		
R63			RK73FB2A103J	CHIP R 10K	J	1/10W		
R64			RK73FB2A122J	CHIP R 1.2K	J	1/10W		
R65			RK73FB2A123J	CHIP R 12K	J	1/10W		
R67 -69			RK73FB2A101J	CHIP R 100	J	1/10W		
R75			RK73FB2A101J	CHIP R 100	J	1/10W		
R76			RK73FB2A105J	CHIP R 1.0M	J	1/10W		
R77			RK73FB2A244J	CHIP R 240K	J	1/10W		
R78			RK73FB2A105J	CHIP R 1.0M	J	1/10W		
R79			RK73FB2A472J	CHIP R 4.7K	J	1/10W		
R80			RK73FB2A101J	CHIP R 100	J	1/10W		
R81			RK73FB2A222J	CHIP R 2.2K	J	1/10W		
R82			RK73FB2A392J	CHIP R 3.9K	J	1/10W		
R83			RK73FB2A103J	CHIP R 10K	J	1/10W		
W101,102			R92-0670-05	CHIP R 0 OHM				
W104-112			R92-0670-05	CHIP R 0 OHM				
W201			R92-0679-05	CHIP R 0 OHM				
W203-207			R92-0679-05	CHIP R 0 OHM				
W209			R92-0679-05	CHIP R 0 OHM				
W213,214			R92-0679-05	CHIP R 0 OHM				
D1 ,2			MA111	DIODE				
D3			HZS5.1N(B2)	ZENER DIODE				
D3			MTZJ5.1(B)	ZENER DIODE				
D4			HZS8.2N(B2)	ZENER DIODE				
D4			MTZJ8.2(B)	ZENER DIODE				
D7			KV1590ATS2	VARIABLE CAPACITANCE DIODE				
IC1		✻	LA1837	ANALOGUE IC				
IC2			LC72131	MOS-IC				
Q1			2SC2714(R,O)	TRANSISTOR				
Q2			2SA1576A(R,S)	TRANSISTOR				
Q2			2SB1218A(Q,R)	TRANSISTOR				
Q3 -5			2SC4081(R,S)	TRANSISTOR				
Q3 -5			2SD1819A(Q,R)	TRANSISTOR				
Q7 ,8			2SC4081(R,S)	TRANSISTOR				
Q7 ,8			2SD1819A(Q,R)	TRANSISTOR				
Q9			2SK302(Y,GR)	FET				
Q10 ,11			2SA1576A(R,S)	TRANSISTOR				
Q10 ,11			2SB1218A(Q,R)	TRANSISTOR				
Q12			2SK302(Y,GR)	FET				
Q16			2SK302(Y,GR)	FET				
Q17			2SC4081(R,S)	TRANSISTOR				
Q17			2SD1819A(Q,R)	TRANSISTOR				
A1		✻	W02-2582-05	FM FRONT-END ASSY				
TUNER UNIT (X05-489X-XX) : KPYMX								
C1 ,2			CK73FB1H103K	CHIP C 0.010UF	K			
C3			CC73FCH1H040C	CHIP C 4.0PF	C			
C5			CK73FB1H222K	CHIP C 2200PF	K			
C7			CK73FB1H102K	CHIP C 1000PF	K			
C8			CK73FB1H103K	CHIP C 0.010UF	K			

L : Scandinavia **K** : USA **P** : Canada **R** : Mexico **C** : China **I** : Malaysia
Y : PX(Far East, Hawaii) **T** : Europe **E** : Europe **G** : Germany **V** : China (Shanghai)
Y : AAFES(Europe) **X** : Australia **Q** : Russia **H** : Korea **M** : Other Areas

⚠ indicates safety critical components.

✻ New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

⑫

Ref. No	Address	New Parts	Parts No.	Description			Destination	Remarks
C9			CE04LW1C100M	ELECTRO 10UF		16WV		
C10			CK73FB1H473K	CHIP C 0.047UF		K		
C11			CE04LW1H010M	ELECTRO 1.0UF		50WV		
C12			CE04LW1H2R2M	ELECTRO 2.2UF		50WV		
C13			CK73FB1H102K	CHIP C 1000PF		K		
C14			CE04LW1H010M	ELECTRO 1.0UF		50WV		
C15			CC73FCH1H220J	CHIP C 22PF		J		
C16			CE04LW1C100M	ELECTRO 10UF		16WV		
C17			CK73FB1H562K	CHIP C 5600PF		K		
C18			CK73FB1H102K	CHIP C 1000PF		K		
C19			CE04HW1E4R7M	NP-ELEC 4.7UF		25WV		
C20			CK73FB1E104K	CHIP C 0.10UF		K		
C21 ,22			CQ93FMG1H123J	MYLAR 0.012UF		J		YMX
C21 ,22			CQ93FMG1H183J	MYLAR 0.018UF		J		KP
C23			CE04LW1H010M	ELECTRO 1.0UF		50WV		
C25			CE04LW1C100M	ELECTRO 10UF		16WV		
C26			CE04LW1C470M	ELECTRO 47UF		16WV		
C27			CE04LW1H010M	ELECTRO 1.0UF		50WV		
C28			CQ93FMG1H223J	MYLAR 0.022UF		J		
C29			CE04LW1H2R2M	ELECTRO 2.2UF		50WV		
C30			CE04LW1C101M	ELECTRO 100UF		16WV		
C31			CE04LW1A470M	ELECTRO 47UF		10WV		
C32			CK73FB1H103K	CHIP C 0.010UF		K		
C33			CC73FSL1H101J	CHIP C 100PF		J		
C34 ,35			CK73FB1H102K	CHIP C 1000PF		K		
C36			CC73FCH1H120J	CHIP C 12PF		J		
C37			CC73FCH1H100D	CHIP C 10PF		D		
C38			CK73FB1H471K	CHIP C 470PF		K		
C52			CC73FCH1H470J	CHIP C 47PF		J		
C57 ,58			CE04LW1H010M	ELECTRO 1.0UF		50WV		
C61 ,62			CQ93FMG1H562J	MYLAR 5600PF		J		YM
C63			CC73FSL1H121J	CHIP C 120PF		J		
C64			CK73FB1H473K	CHIP C 0.047UF		K		
CN1			E40-8052-05	SOCKET FOR PIN ASSY				
J1			E20-0476-05	LOCK TERMINAL BOARD(4P)				
J1			E70-0051-05	LOCK TERMINAL BOARD				
CF1 ,2		✻	L72-0611-05	CERAMIC FILTER				
CF3		✻	L72-0613-05	CERAMIC FILTER				
L1			L39-1366-05	COMBINATION COIL				
L2			L30-0911-05	AM IFT				
L3 ,4			L40-1091-17	SMALL FIXED INDUCTOR(1UH)				
X1			L77-2232-05	CRYSTAL RESONATOR				
X2			L78-0637-05	RESONATOR (456KHZ)				
R1			RK73FB2A332J	CHIP R 3.3K	J	1/10W		
R2			RK73FB2A681J	CHIP R 680	J	1/10W		
R3			RK73FB2A5R6J	CHIP R 5.6	J	1/10W		
R4 ,5			RK73FB2A331J	CHIP R 330	J	1/10W		
R6			RK73FB2A101J	CHIP R 100	J	1/10W		
R7			RK73FB2A473J	CHIP R 47K	J	1/10W		
R8			RK73FB2A331J	CHIP R 330	J	1/10W		
R12			RK73FB2A472J	CHIP R 4.7K	J	1/10W		
R13			RK73FB2A333J	CHIP R 33K	J	1/10W		
R15 ,16			RK73FB2A224J	CHIP R 220K	J	1/10W		

L : Scandinavia **K** : USA **P** : Canada **R** : Mexico **C** : China **I** : Malaysia
Y : PX(Far East, Hawaii) **T** : Europe **E** : Europe **G** : Germany **V** : China (Shanghai)
Y : AAFES(Europe) **X** : Australia **Q** : Russia **H** : Korea **M** : Other Areas

⚠ indicates safety critical components.

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

13

Ref. No	Address	New Parts	Parts No.	Description			Destination	Remarks
R17			RK73FB2A271J	CHIP R 270	J	1/10W		
R18			RK73FB2A302J	CHIP R 3.0K	J	1/10W		
R19			RK73FB2A822J	CHIP R 8.2K	J	1/10W		
R21 -23			RK73FB2A102J	CHIP R 1.0K	J	1/10W		
R24			RK73FB2A562J	CHIP R 5.6K	J	1/10W		
⚠ R25			RD14NB2E101J	RD 100	J	1/4W		
⚠ R26			RD14NB2E561J	RD 560	J	1/4W		
R27			RK73FB2A102J	CHIP R 1.0K	J	1/10W		
R28			RK73FB2A103J	CHIP R 10K	J	1/10W		
R29 ,30			RK73FB2A102J	CHIP R 1.0K	J	1/10W		
R31			RK73FB2A103J	CHIP R 10K	J	1/10W		
R32			RK73FB2A122J	CHIP R 1.2K	J	1/10W		
R33			RK73FB2A123J	CHIP R 12K	J	1/10W		
⚠ R41			RS14KB3A181J	FL-PROOF RS 180	J	1W		
⚠ R42			RD14NB2E820J	RD 82	J	1/4W		
⚠ R43			RD14NB2E221J	RD 220	J	1/4W		
R44			RK73FB2A101J	CHIP R 100	J	1/10W		
R46			RK73FB2A104J	CHIP R 100K	J	1/10W		
R48			RK73FB2A473J	CHIP R 47K	J	1/10W		
R50			RK73FB2A471J	CHIP R 470	J	1/10W	YM	
R73 ,74			RK73FB2A332J	CHIP R 3.3K	J	1/10W		
VR1			R32-0038-05	SEMI FIXED VARIABLE RESISTOR				
W108,109			R92-0670-05	CHIP R 0 OHM				
W111-114			R92-0670-05	CHIP R 0 OHM				
W111-119			R92-0670-05	CHIP R 0 OHM			YM	
W117,118			R92-0670-05	CHIP R 0 OHM				
W121			R92-0670-05	CHIP R 0 OHM				
W202-208			R92-0679-05	CHIP R 0 OHM				
W210,211			R92-0679-05	CHIP R 0 OHM				
D1 ,2			HSS104	DIODE				
D1 ,2			1SS133	DIODE				
D3 ,4			HZS5.1N(B2)	ZENER DIODE				
D3 ,4			MTZJ5.1(B)	ZENER DIODE				
D8			HSS104	DIODE				
D8			1SS133	DIODE				
D10			MA111	DIODE				
IC1			LA1832	ANALOGUE IC				
IC2			LC72131	MOS-IC				
Q1			2SC2714(R,O)	TRANSISTOR				
Q3			2SA1576A(R,S)	TRANSISTOR				
Q3			2SB1218A(Q,R)	TRANSISTOR				
Q5			2SC4081(R,S)	TRANSISTOR				
Q5			2SD1819A(Q,R)	TRANSISTOR				
Q9 ,10			2SC4081(R,S)	TRANSISTOR			YM	
Q9 ,10			2SD1819A(Q,R)	TRANSISTOR			YM	
A1			W02-2638-05	FM FRONT-END ASSY				

TUNER UNIT (X05-490X-XX) : TEQE2

C1			CE04LW1C470M	ELECTRO	47UF	16WV		
C2			CE04LW1H010M	ELECTRO	1.0UF	50WV		
C3 -8			CK73FB1H103K	CHIP C	0.010UF	K		
C9			C91-0769-05	CERAMIC	0.010UF	K		
C30			CK73EB1E473K	CHIP C	0.047UF	K		
C31			CE04LW1C470M	ELECTRO	47UF	16WV		

L: Scandinavia **K**: USA **P**: Canada **R**: Mexico **C**: China **I**: Malaysia
Y: PX(Far East, Hawaii) **T**: Europe **E**: Europe **G**: Germany **V**: China (Shanghai)
Y: AAFES(Europe) **X**: Australia **Q**: Russia **H**: Korea **M**: Other Areas

⚠ indicates safety critical components.

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

14

Ref. No	Address	New Parts	Parts No.	Description			Destination	Remarks
C32			CK73FB1H103K	CHIP C 0.010UF	K			
C33			CE04LW1C100M	ELECTRO 10UF	16WV			
C34			CK73EB1E104K	CHIP C 0.10UF	K			
C35			CE04LW1C100M	ELECTRO 10UF	16WV			
C36			CK73FB1E473K	CHIP C 0.047UF	K			
C37			CK73EF1E105Z	CHIP C 1.0UF	Z			
C38			C90-3217-05	ELECTRO 10UF	10WV			
C39			CC73FSL1H101J	CHIP C 100PF	J		Q	
C40			C90-3253-05	ELECTRO 1.0UF	50WV			
C41			C90-3251-05	ELECTRO 0.47UF	50WV			
C42			C90-3240-05	ELECTRO 2.2UF	35WV			
C43			CE04LW1HR47M	ELECTRO 0.47UF	50WV			
C44			CK73FB1E473K	CHIP C 0.047UF	K			
C45			CC73FCH1H220J	CHIP C 22PF	J			
C46			CE04LW1A101M	ELECTRO 100UF	10WV			
C47			CK73FB1H682K	CHIP C 6800PF	K			
C48			CC73FSL1H681J	CHIP C 680PF	J		Q	
C48			CC73FSL1H821J	CHIP C 820PF	J			
C49			C90-3253-05	ELECTRO 1.0UF	50WV			
C50			CK73FB1H102K	CHIP C 1000PF	K			
C51 ,52			C90-3217-05	ELECTRO 10UF	10WV			
C53 ,54			CK73FB1H153K	CHIP C 0.015UF	K		TEE2	
C53 ,54			CK73FB1H183K	CHIP C 0.018UF	K		Q	
C55 ,56			C90-3231-05	ELECTRO 3.3UF	25WV		Q	
C55 ,56			C90-3240-05	ELECTRO 2.2UF	35WV		TEE2	
C59			CC73ESL1H101J	CHIP C 100PF	J		Q	
C60			CK73FB1E104K	CHIP C 0.10UF	K			
C61			CK73FB1H103K	CHIP C 0.010UF	K			
C62			CK73FB1H333K	CHIP C 0.033UF	K		TQ	
C63			CC73FCH1H090D	CHIP C 9.0PF	D		TQ	
C64			CK73FB1H333K	CHIP C 0.033UF	K			
C66			CC73FCH1H060D	CHIP C 6.0PF	D			
C67			CC73FCH1H220J	CHIP C 22PF	J		EQE2	
C67			CC73FCH1H330J	CHIP C 33PF	J		T	
C68			CC73FSL1H020C	CHIP C 2.0PF	C		EE2	
C69			CK73FB1H103K	CHIP C 0.010UF	K			
C70			CC73FSL1H101J	CHIP C 100PF	J			
C77 ,78			CK73FB1H332K	CHIP C 3300PF	K		TEE2	
C79 ,80			CC73FSL1H101J	CHIP C 100PF	J		Q	
C80			CC73FSL1H101J	CHIP C 100PF	J		TEE2	
C81			CC73FCH1H220J	CHIP C 22PF	J			
C82			CC73FCH1H270J	CHIP C 27PF	J			
C83 ,84			CK73FB1H102K	CHIP C 1000PF	K			
C85			C91-0745-05	CERAMIC 100PF	K			
C86			C91-0757-05	CERAMIC 1000PF	K			
C87			CE04LW1A470M	ELECTRO 47UF	10WV			
C88			CC73FSL1H331J	CHIP C 330PF	J		Q	
C89			CE04LW1C470M	ELECTRO 47UF	16WV			
C90			CE04LW1H2R2M	ELECTRO 2.2UF	50WV			
C91			CQ93FMG1H223J	MYLAR 0.022UF	J			
C92			CC73FSL1H471J	CHIP C 470PF	J			
C93			CK73FB1H103K	CHIP C 0.010UF	K			
C94			CK73FB1H102K	CHIP C 1000PF	K			
C95			CC73FCH1H470J	CHIP C 47PF	J			
C96			CC73FSL1H101J	CHIP C 100PF	J			

L: Scandinavia **K**: USA **P**: Canada **R**: Mexico **C**: China **I**: Malaysia
Y: PX(Far East, Hawaii) **T**: Europe **E**: Europe **G**: Germany **V**: China (Shanghai)
Y: AAFES(Europe) **X**: Australia **Q**: Russia **H**: Korea **M**: Other Areas

⚠ indicates safety critical components.

✻ New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

⑮

Ref. No	Address	New Parts	Parts No.	Description				Destination	Remarks
CN1			E40-8052-05	SOCKET FOR PIN ASSY					
CN2			E40-4871-05	PIN ASSY					
J1			E20-0321-05	LOCK TERMINAL BOARD(2P,F)					
J1			E70-0052-05	LOCK TERMINAL BOARD					
CF1 ,2		✻	L72-0612-05	CERAMIC FILTER					
L31			L30-0929-05	FM IFT					
L32			L30-0930-05	FM IFT					
L33			L30-0911-05	AM IFT					
L34			L79-1237-05	LC FILTER					
L61			L40-1091-17	SMALL FIXED INDUCTOR(1UH)					
L62		✻	L39-1367-05	COMBINATION COIL				EE2	
L62		✻	L39-1368-05	COMBINATION COIL				TQ	
L63			L40-1001-17	SMALL FIXED INDUCTOR(10UH,K)				EE2	
L81			L40-1091-17	SMALL FIXED INDUCTOR(1UH)					
X31			L78-0637-05	RESONATOR (456KHZ)					
X81			L77-2185-05	CRYSTAL RESONATOR					
⚠ R1			RD14NB2E101J	RD	100	J	1/4W		
R2			RK73EB2B221J	CHIP R	220	J	1/8W		
R3			RK73FB2A332J	CHIP R	3.3K	J	1/10W		
R4			RK73FB2A681J	CHIP R	680	J	1/10W		
R5			RK73FB2A331J	CHIP R	330	J	1/10W		
R6			RK73FB2A220J	CHIP R	22	J	1/10W		
R7			RK73FB2A332J	CHIP R	3.3K	J	1/10W		
R8			RK73FB2A331J	CHIP R	330	J	1/10W		
R10			RK73FB2A332J	CHIP R	3.3K	J	1/10W		
R11			RK73FB2A681J	CHIP R	680	J	1/10W		
R12			RK73FB2A122J	CHIP R	1.2K	J	1/10W		
R13 ,14			RK73FB2A331J	CHIP R	330	J	1/10W		
R15			RK73FB2A101J	CHIP R	100	J	1/10W		
R16			RK73FB2A220J	CHIP R	22	J	1/10W	TEE2	
R16			RK73FB2A470J	CHIP R	47	J	1/10W	Q	
R17			RK73FB2A621J	CHIP R	620	J	1/10W		
R18			RK73FB2A123J	CHIP R	12K	J	1/10W		
R19			RK73FB2A4R7J	CHIP R	4.7	J	1/10W		
R20			RK73FB2A122J	CHIP R	1.2K	J	1/10W		
R31			RS14KB3A820J	FL-PROOF RS	82	J	1W		
R32			RK73EB2B562J	CHIP R	5.6K	J	1/8W		
R33			RK73FB2A302J	CHIP R	3.0K	J	1/10W		
R34			RK73FB2A822J	CHIP R	8.2K	J	1/10W		
R35			RK73FB2A333J	CHIP R	33K	J	1/10W		
R36			RK73FB2A393J	CHIP R	39K	J	1/10W		
R38			RK73FB2A333J	CHIP R	33K	J	1/10W		
R39			RK73FB2A223J	CHIP R	22K	J	1/10W		
R40			RK73FB2A332J	CHIP R	3.3K	J	1/10W		
R41			RK73FB2A222J	CHIP R	2.2K	J	1/10W		
R42			RK73FB2A473J	CHIP R	47K	J	1/10W		
R43 ,44			RK73FB2A123J	CHIP R	12K	J	1/10W	Q	
R43 ,44			RK73FB2A223J	CHIP R	22K	J	1/10W	TEE2	
R47 ,48			RK73FB2A392J	CHIP R	3.9K	J	1/10W		
R49			RK73FB2A473J	CHIP R	47K	J	1/10W		
R51			RK73FB2A102J	CHIP R	1.0K	J	1/10W		
R52			RK73FB2A104J	CHIP R	100K	J	1/10W		
R53			RK73FB2A102J	CHIP R	1.0K	J	1/10W		
R54			RK73FB2A683J	CHIP R	68K	J	1/10W		

L : Scandinavia
Y : PX(Far East, Hawaii)
Y : AAFES(Europe)
K : USA
T : Europe
X : Australia
P : Canada
E : Europe
Q : Russia
R : Mexico
G : Germany
H : Korea
C : China
V : China (Shanghai)
M : Other Areas
I : Malaysia

⚠ indicates safety critical components.

✻ New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

⑯

Ref. No	Address	New Parts	Parts No.	Description				Destination	Remarks
R55			RK73FB2A473J	CHIP R	47K	J	1/10W		
R56			RK73FB2A104J	CHIP R	100K	J	1/10W		
R57			RK73FB2A101J	CHIP R	100	J	1/10W	Q	
R59			RK73FB2A222J	CHIP R	2.2K	J	1/10W		
R61			RK73FB2A223J	CHIP R	22K	J	1/10W	TQ	
R62			RK73FB2A105J	CHIP R	1.0M	J	1/10W	TQ	
R63			RK73FB2A473J	CHIP R	47K	J	1/10W	TQ	
R64			RK73FB2A103J	CHIP R	10K	J	1/10W	TQ	
R65			RK73FB2A153J	CHIP R	15K	J	1/10W	TQ	
R66			RK73FB2A152J	CHIP R	1.5K	J	1/10W	TQ	
R67			RK73FB2A104J	CHIP R	100K	J	1/10W		
R68			RK73FB2A222J	CHIP R	2.2K	J	1/10W	TQ	
R70			RK73FB2A105J	CHIP R	1.0M	J	1/10W	TQ	
R80			RK73EB2B102J	CHIP R	1.0K	J	1/8W		
R81 -83			RK73FB2A102J	CHIP R	1.0K	J	1/10W		
R84			RK73FB2A103J	CHIP R	10K	J	1/10W		
R85 -88			RK73FB2A102J	CHIP R	1.0K	J	1/10W		
⚠ R89			RD14NB2E101J	RD	100	J	1/4W		
R90			RK73FB2A562J	CHIP R	5.6K	J	1/10W		
R91			RK73FB2A222J	CHIP R	2.2K	J	1/10W		
R92			RK73FB2A123J	CHIP R	12K	J	1/10W		
R93			RK73FB2A122J	CHIP R	1.2K	J	1/10W		
⚠ R94			RD14NB2E561J	RD	560	J	1/4W		
R101,102			RK73FB2A102J	CHIP R	1.0K	J	1/10W		
R103			RK73FB2A821J	CHIP R	820	J	1/10W		
R104			RK73FB2A473J	CHIP R	47K	J	1/10W		
R105			RK73FB2A103J	CHIP R	10K	J	1/10W	E2	
R105			RK73FB2A103J	CHIP R	10K	J	1/10W		
VR1			R32-0036-05	SEMI FIXED VARIABLE RESISTOR					
W51 -55			R92-0670-05	CHIP R	0 OHM			EE2	
W53			R92-0670-05	CHIP R	0 OHM			TQ	
W56 -58			R92-0679-05	CHIP R	0 OHM				
W59 -61			R92-0670-05	CHIP R	0 OHM			TEE2	
W59 ,60			R92-0670-05	CHIP R	0 OHM			Q	
W62 -67			R92-0679-05	CHIP R	0 OHM				
W68			R92-0670-05	CHIP R	0 OHM			Q	
W69 -71			R92-0679-05	CHIP R	0 OHM			EE2	
W69 -72			R92-0679-05	CHIP R	0 OHM			TQ	
W73			R92-0670-05	CHIP R	0 OHM				
W74			R92-0679-05	CHIP R	0 OHM			Q	
W75			R92-0670-05	CHIP R	0 OHM			EE2	
W75 -78			R92-0670-05	CHIP R	0 OHM			T	
W75 -80			R92-0670-05	CHIP R	0 OHM			Q	
W77 ,78			R92-0670-05	CHIP R	0 OHM			EE2	
W80			R92-0670-05	CHIP R	0 OHM				
W81			R92-0679-05	CHIP R	0 OHM				
W82			R92-0670-05	CHIP R	0 OHM				
W83 ,84			R92-0679-05	CHIP R	0 OHM				
W85			R92-0670-05	CHIP R	0 OHM				
D1			HSS104	DIODE					
D1			1SS133	DIODE					
D31			HZS8.2N(B2)	ZENER DIODE					
D31			MTZJ8.2(B)	ZENER DIODE					
D32			MA111	DIODE					

L : Scandinavia
Y : PX(Far East, Hawaii)
Y : AAFES(Europe)
K : USA
T : Europe
X : Australia
P : Canada
E : Europe
Q : Russia
R : Mexico
G : Germany
H : Korea
C : China
V : China (Shanghai)
M : Other Areas
I : Malaysia

⚠ indicates safety critical components.

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

⑰

Ref. No	Address	New Parts	Parts No.	Description			Destination	Remarks
D33			HSS104	DIODE				
D33			1SS133	DIODE				
D61 ,62			HSS104	DIODE				
D61 ,62			1SS133	DIODE				
D81			HZS5.1N(B2)	ZENER DIODE				
D81			MTZJ5.1(B)	ZENER DIODE				
D101			HZS3.3N(B2)	ZENER DIODE				
D101			MTZJ3.3(B)	ZENER DIODE				
IC1			LA1836	ANALOGUE IC				
IC2			LC72131	MOS-IC				
IC3			NJM2904M	IC(OP AMP X2)				
Q1 ,2			2SC2714(R,O)	TRANSISTOR				
Q3			2SA1576A(R,S)	TRANSISTOR				
Q3			2SB1218A(Q,R)	TRANSISTOR				
Q31 ,32			2SC4081(R,S)	TRANSISTOR				
Q31 ,32			2SD1819A(Q,R)	TRANSISTOR				
Q61 ,62			2SC4081(R,S)	TRANSISTOR			TQ	
Q61 ,62			2SD1819A(Q,R)	TRANSISTOR			TQ	
Q63			2SC2878(B)	TRANSISTOR			TQ	
Q64			2SA1576A(R,S)	TRANSISTOR			TQ	
Q64			2SB1218A(Q,R)	TRANSISTOR			TQ	
Q65			2SK302(Y,GR)	FET			TQ	
Q81			2SA1576A(R,S)	TRANSISTOR				
Q81			2SB1218A(Q,R)	TRANSISTOR				
Q101,102			2SD2114K	TRANSISTOR				
Q103			2SA1576A(R,S)	TRANSISTOR				
Q103			2SB1218A(Q,R)	TRANSISTOR				
A1			W02-2640-05	FM FRONT-END ASSY			TEE2	
A1			W02-2641-05	FM FRONT-END ASSY			Q	
AUDIO UNIT (X09-494X-XX) : RXD-701/701E/701W/751/751E/751W/771S/A8								
C1 -5			CC45FSL1H221J	CERAMIC	220PF	J	M2E2	
C1 -5			CC45FSL1H221J	CERAMIC	220PF	J	YMXTEQ	
C1 ,2			CC45FSL1H221J	CERAMIC	220PF	J	KP	
C5			CC45FSL1H221J	CERAMIC	220PF	J	KP	
C6			CK45FB1H102K	CERAMIC	1000PF	K		
C7			CF92FV1H224J	MF-C	0.22UF	J		
C9			CE04KW1H2R2M	ELECTRO	2.2UF	50WV		
C11 ,12			CE04KW1C100M	ELECTRO	10UF	16WV		
C13 -16			CC45FSL1H101J	CERAMIC	100PF	J		
C17 ,18			CE04KW1C100M	ELECTRO	10UF	16WV		
C21 ,22			CF92FV1H104J	MF-C	0.10UF	J		
C23			CE04KW1C221M	ELECTRO	220UF	16WV		
C24 ,25			CF92FV1H104J	MF-C	0.10UF	J		
C26			CE04KW1C221M	ELECTRO	220UF	16WV		
C27			CE04KW1C101M	ELECTRO	100UF	16WV		
C28			CE04KW1C100M	ELECTRO	10UF	16WV		
C29			CF92FV1H394J	MF-C	0.39UF	J		
C30			CQ93FMG1H333J	MYLAR	0.033UF	J		
C31			CE04KW1A101M	ELECTRO	100UF	10WV		
C32 -34			CE04KW1C100M	ELECTRO	10UF	16WV		
C35 ,36			CE04KW1H2R2M	ELECTRO	2.2UF	50WV		
C37 ,38			CE04KW1HR47M	ELECTRO	0.47UF	50WV		
C39			CK45FF1H472Z	CERAMIC	4700PF	Z		
C40			CE04KW1HR47M	ELECTRO	0.47UF	50WV		

L : Scandinavia **K** : USA **P** : Canada **R** : Mexico **C** : China **I** : Malaysia
Y : PX(Far East, Hawaii) **T** : Europe **E** : Europe **G** : Germany **V** : China (Shanghai)
Y : AAFES(Europe) **X** : Australia **Q** : Russia **H** : Korea **M** : Other Areas

⚠ indicates safety critical components.

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

⑱

Ref. No	Address	New Parts	Parts No.	Description			Destination	Remarks
C41			CK45FF1H103Z	CERAMIC	0.010UF	Z		
C42			CE04KW1V4R7M	ELECTRO	4.7UF	35WV		
C43 ,44			CE04KW1H3R3M	ELECTRO	3.3UF	50WV		
C45 ,46			CQ93FMG1H563J	MYLAR	0.056UF	J		
C47 ,48			CE04KW1HR33M	ELECTRO	0.33UF	50WV		
C49 ,50			CQ93FMG1H153J	MYLAR	0.015UF	J		
C51 ,52			CE04KW1H2R2M	ELECTRO	2.2UF	50WV		
C53 ,54			CQ93FMG1H682J	MYLAR	6800PF	J		
C55 ,56			CQ93FMG1H153J	MYLAR	0.015UF	J		
C57 ,58			CQ93FMG1H222J	MYLAR	2200PF	J		
C59			CE04KW1H3R3M	ELECTRO	3.3UF	50WV		
C61			CE04KW1H3R3M	ELECTRO	3.3UF	50WV		
C63 -68			CE04KW1H3R3M	ELECTRO	3.3UF	50WV		
C69			CC45FSL1H221J	CERAMIC	220PF	J		
C70			CE04HW1HR22M	NP-ELEC	0.22UF	50WV		
C71 ,72			CE04KW1C100M	ELECTRO	10UF	16WV		
C73 ,74			CC45FSL1H101J	CERAMIC	100PF	J	TEQE2	
C77 ,78			CE04KW1C100M	ELECTRO	10UF	16WV		
C79			CK45FB1H102K	CERAMIC	1000PF	K		
C80			CK45FF1H103Z	CERAMIC	0.010UF	Z		
C81			CE04KW2A101M	ELECTRO	100UF	100WV		
C82 ,83			CE04KW1V470M	ELECTRO	47UF	35WV		
C88 ,89			C90-3790-05	ELECTRO	4700UF	35WV		
C90 ,91			C90-3789-05	ELECTRO	4700UF	75WV		
C94			CE04KW1C221M	ELECTRO	220UF	16WV		
C95			CE04KW1V4R7M	ELECTRO	4.7UF	35WV		
C96			CE04KW1A470M	ELECTRO	47UF	10WV		
C97			CE04KW1V4R7M	ELECTRO	4.7UF	35WV		
C98 ,99			CE04KW1C470M	ELECTRO	47UF	16WV		
C100			CK45FF1H103Z	CERAMIC	0.010UF	Z		
C101			CE04KW1V4R7M	ELECTRO	4.7UF	35WV		
C102			CE04KW1A221M	ELECTRO	220UF	10WV		
C103			CE04KW1C220M	ELECTRO	22UF	16WV		
C104			CE04KW1H010M	ELECTRO	1.0UF	50WV		
C106			CE04KW1V4R7M	ELECTRO	4.7UF	35WV		
C108,109			CF92FV1H104J	MF-C	0.10UF	J		
C110			CE04KW1C470M	ELECTRO	47UF	16WV		
C111,112			CE04KW1H010M	ELECTRO	1.0UF	50WV		
C113			CE04KW0J471M	ELECTRO	470UF	6.3WV		
C114			CK45FF1H103Z	CERAMIC	0.010UF	Z		
C119,120			CE04KW1C100M	ELECTRO	10UF	16WV		
C125,126			CE04KW1V4R7M	ELECTRO	4.7UF	35WV		
C128-130			CE04KW1H0R1M	ELECTRO	0.1UF	50WV		
C131			CE04KW1C100M	ELECTRO	10UF	16WV		
C139,140			CE04KW1C100M	ELECTRO	10UF	16WV		
C141			CE04KW1V4R7M	ELECTRO	4.7UF	35WV	TEQE2	
C142			CC45FSL1H331J	CERAMIC	330PF	J	TEQE2	
C143			CK45FB1H561K	CERAMIC	560PF	K	TEQE2	
C144			CC45FCH1H470J	CERAMIC	47PF	J	TEQE2	
C145			CC45FCH1H220J	CERAMIC	22PF	J	TEQE2	
C146			CK45FF1H103Z	CERAMIC	0.010UF	Z	TEQE2	
C147			CE04KW1A470M	ELECTRO	47UF	10WV	TEQE2	
C148,149			CK45FF1H103Z	CERAMIC	0.010UF	Z	TEQE2	
C151,152			CC45FSL1H180J	CERAMIC	18PF	J		
C153			CE04KW1C470M	ELECTRO	47UF	16WV		

L : Scandinavia **K** : USA **P** : Canada **R** : Mexico **C** : China **I** : Malaysia
Y : PX(Far East, Hawaii) **T** : Europe **E** : Europe **G** : Germany **V** : China (Shanghai)
Y : AAFES(Europe) **X** : Australia **Q** : Russia **H** : Korea **M** : Other Areas

⚠ indicates safety critical components.

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

⑲

Ref. No	Address	New Parts	Parts No.	Description	Destination	Remarks
C154			CE04KW1V100M	ELECTRO 10UF 35WV		
C155			CE04KW1V330M	ELECTRO 33UF 35WV		
C159,160			CC45FSL1H220J	CERAMIC 22PF J	TEQE2	
C497,498			CK45FB1H102K	CERAMIC 1000PF K		
C500			CK45FF1H103Z	CERAMIC 0.010UF Z	TEQE2	
C501,502			CQ93FMG1H563J	MYLAR 0.056UF J		
C503,504			CC45FSL1H470J	CERAMIC 47PF J		
C505			CE04KW1H2R2M	ELECTRO 2.2UF 50WV		
C507			CC45FSL1H470J	CERAMIC 47PF J		
C509-511			CC45FSL1H100D	CERAMIC 10PF D		
C513-515			CK45FF1H472Z	CERAMIC 4700PF Z		
C517-519			CF92FV1H224J	MF-C 0.22UF J	M2E2	
C517-519			CF92FV1H224J	MF-C 0.22UF J	YMXTEQ	
C517,518			CF92FV1H104J	MF-C 0.10UF J	KP	
C521-523			CF92FV1H224J	MF-C 0.22UF J	M2E2	
C521-523			CF92FV1H224J	MF-C 0.22UF J	YMXTEQ	
C523			CF92FV1H104J	MF-C 0.10UF J	KP	
C525-528			CK45FF1H472Z	CERAMIC 4700PF Z		
C529,530			CC45FSL1H101J	CERAMIC 100PF J	TEQE2	
C531-533			CE04KW1A101M	ELECTRO 100UF 10WV		
C535-538			CE04KW2A100M	ELECTRO 10UF 100WV		
C539,540			CE04KW1V470M	ELECTRO 47UF 35WV		
CN5			E40-3257-05	PIN ASSY		
CN6			E40-3262-05	PIN ASSY		
CN7			E40-3247-05	PIN ASSY		
CN11			E40-8053-05	PIN ASSY		
CN12		*	E40-8286-05	FLAT CABLE CONNECTOR	YMXM2	
CN13			E40-3256-05	PIN ASSY		
CN14			E40-8253-05	FLAT CABLE CONNECTOR		
CN15			E40-3251-05	PIN ASSY		
CN19		*	E40-8120-05	FLAT CABLE CONNECTOR		
CN21		*	E40-8257-05	FLAT CABLE CONNECTOR		
CN22			E40-4632-05	PIN ASSY		
CN24			E40-3256-05	PIN ASSY		
J1		*	E63-1038-05	PHONO JACK	KP	
J2			E70-0048-05	LOCK TERMINAL BOARD		
J3			E70-0045-05	LOCK TERMINAL BOARD	M2E2	
J3			E70-0045-05	LOCK TERMINAL BOARD	YMXTEQ	
J5		*	E63-1037-05	PHONO JACK	M2E2	
J5		*	E63-1037-05	PHONO JACK	YMXTEQ	
-			F20-1405-15	INSULATING SHEET		
⚠ F1			F05-3121-05	FUSE (SEMKO) (250V T3.15AL)	XTEQE2	
⚠ F1			F50-0074-05	FUSE(5X20)	KP	
⚠ F1 ,2			F05-3121-05	FUSE (SEMKO) (250V T3.15AL)	YMM2	
⚠ F3			F50-0062-05	FUSE(5X20)	KP	
CN1 -4			J13-0075-05	FUSE CLIP	YMM2	
CN1 ,2			J13-0075-05	FUSE CLIP	E2	
CN1 ,2			J13-0075-05	FUSE CLIP	KPXTEQ	
CN31,32			J13-0075-05	FUSE CLIP	KP	
E21 -24			J11-0809-05	WIRE CLAMPER		
E26 ,27			J11-0809-05	WIRE CLAMPER	YMXM2	
E27			J11-0809-05	WIRE CLAMPER	TEQE2	
L1			L40-1091-17	SMALL FIXED INDUCTOR(1UH)	TEQE2	

L : Scandinavia **K** : USA **P** : Canada **R** : Mexico **C** : China **I** : Malaysia
Y : PX(Far East, Hawaii) **T** : Europe **E** : Europe **G** : Germany **V** : China (Shanghai)
Y : AAFES(Europe) **X** : Australia **Q** : Russia **H** : Korea **M** : Other Areas

⚠ indicates safety critical components.

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

⑳

Ref. No	Address	New Parts	Parts No.	Description	Destination	Remarks
L2			L40-1001-17	SMALL FIXED INDUCTOR(10UH,K) TEQE2		
L3 -5			L39-1373-05	PHASE COMPENSATION COIL		
X1			L78-0605-05	RESONATOR (8.38MHZ)		
X2			L77-2173-05	CRYSTAL RESONATOR(32.768KHZ)		
X3			L77-2002-05	CRYSTAL RESONATOR(4.332MHZ)	TEQE2	
⚠ R3			RD14NB2E680J	RD 68 J 1/4W		
⚠ R45			RD14NB2E1R0J	RD 1 J 1/4W		
⚠ R46			RD14NB2E472J	RD 4.7K J 1/4W		
R48			RD14NB2E8R2J	RD 8.2 J 1/4W		
R56			RD14NB2E332J	RD 3.3K J 1/4W		
R63			RD14NB2E102J	RD 1.0K J 1/4W		
⚠ R75			RD14NB2E100J	RD 10 J 1/4W		
R80			RS14KB3A222J	FL-PROOF RS 2.2K J 1W		
R96			RS14KB3D332J	FL-PROOF RS 3.3K J 2W		
⚠ R118,119			RD14NB2E1R0J	RD 1 J 1/4W		
⚠ R129,130			RD14NB2E1R0J	RD 1 J 1/4W		
⚠ R131			RD14BB2C100J	RD 10 J 1/6W		
⚠ R142			RD14BB2C101J	RD 100 J 1/6W		
⚠ R187,188			RS14KB3D3R3J	FL-PROOF RS 3.3 J 2W		
R531,532			R92-1866-05	METALFILM 0.1 2W		
R543,544			RS14KB3D4R7J	FL-PROOF RS 4.7 J 2W		
R551			R92-1866-05	METALFILM 0.1 2W		
⚠ R560			RS14KB3D5R6J	FL-PROOF RS 5.6 J 2W		
R563			RS14KB3D4R7J	FL-PROOF RS 4.7 J 2W		
⚠ R565,566			RD14NB2E221J	RD 220 J 1/4W		
⚠ R578			RS14KB3D101J	FL-PROOF RS 100 J 2W		
R583-585			RD14NB2E4R7J	RD 4.7 J 1/4W		
R598			RS14KB3D101J	FL-PROOF RS 100 J 2W		
⚠ R599			R92-1844-05	CARBON 3.3M J 1/2W	KP	
VR1		*	R31-0096-05	VARIABLE RESISTOR		
⚠ K1 ,2			S76-0060-05	MAGNETIC RELAY		
⚠ K1 ,2		*	S76-0069-15	MAGNETIC RELAY		
K11			S76-0076-05	MAGNETIC RELAY		
K12			S76-0078-05	MAGNETIC RELAY		
K13			S76-0076-05	MAGNETIC RELAY		
⚠ S1			S62-0001-05	SLIDE SWITCH	YMM2	
S2			S62-0055-05	SLIDE SWITCH	M2E2	
S2			S62-0055-05	SLIDE SWITCH	YMXTEQ	
D1			HZS5.1N(B2)	ZENER DIODE		
D1			MTZJ5.1(B)	ZENER DIODE		
D2			HSS104A	DIODE		
D2			1SS133	DIODE		
D3			HZS5.1N(B2)	ZENER DIODE		
D3			MTZJ5.1(B)	ZENER DIODE		
D4			HZS3.9N(B2)	ZENER DIODE		
D4			MTZJ3.9(B)	ZENER DIODE		
D5 -7			HSS104A	DIODE	EQE2	
D5 -7			HSS104A	DIODE	KPYMXT	
D5 -7			1SS133	DIODE	EQE2	
D5 -7			1SS133	DIODE	KPYMXT	
D5 -8			HSS104A	DIODE	M2	
D5 -8			1SS133	DIODE	M2	
D10			HSS104A	DIODE	TEQE2	
D10			1SS133	DIODE	TEQE2	

L : Scandinavia **K** : USA **P** : Canada **R** : Mexico **C** : China **I** : Malaysia
Y : PX(Far East, Hawaii) **T** : Europe **E** : Europe **G** : Germany **V** : China (Shanghai)
Y : AAFES(Europe) **X** : Australia **Q** : Russia **H** : Korea **M** : Other Areas

⚠ indicates safety critical components.

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

(27)

Ref. No	Address	New Parts	Parts No.	Description	Destination	Remarks
D12 -14			HSS104A	DIODE	YMXQM2	
D12 -14			1SS133	DIODE	YMXQM2	
D12 ,13			HSS104A	DIODE	T	
D12 ,13			1SS133	DIODE	T	
D13			HSS104A	DIODE	KP	
D13			1SS133	DIODE	KP	
D13 ,14			HSS104A	DIODE	EE2	
D13 ,14			1SS133	DIODE	EE2	
D16			HSS104A	DIODE	TEQE2	
D16			1SS133	DIODE	TEQE2	
D17 ,18			S5688B	DIODE		
D17 ,18			1SR139-400	DIODE		
D19			HZS16N(B2)	ZENER DIODE		
D19			MTZJ16(B)	ZENER DIODE		
D20			HZS18N(B2)	ZENER DIODE		
D20			MTZJ18(B)	ZENER DIODE		
D21			HSS104A	DIODE		
D21			1SS133	DIODE		
⚠ D22 ,23			D4SBL20UF03	DIODE		
⚠ D24 -27			S5688B	DIODE		
⚠ D24 -27			1SR139-400	DIODE		
⚠ D28 ,29			HSS104A	DIODE		
⚠ D28 ,29			1SS133	DIODE		
D30			HZS2.7N(B2)	ZENER DIODE		
D30			MTZJ2.7(B)	ZENER DIODE		
D31			HZS6.2N(B2)	ZENER DIODE		
D31			MTZJ6.2(B)	ZENER DIODE		
⚠ D32			HSS104A	DIODE		
⚠ D32			1SS133	DIODE		
D33			HZS5.6N(B2)	ZENER DIODE		
D33			MTZJ5.6(B)	ZENER DIODE		
D34			HZS5.1N(B2)	ZENER DIODE		
D34			MTZJ5.1(B)	ZENER DIODE		
D35			HZS5.6N(B2)	ZENER DIODE		
D35			MTZJ5.6(B)	ZENER DIODE		
D36			HZS20N(B2)	ZENER DIODE		
D36			MTZJ20(B)	ZENER DIODE		
D37 -40			HSS104A	DIODE		
D37 -40			1SS133	DIODE		
D45 -49			HSS104A	DIODE		
D45 -49			1SS133	DIODE		
⚠ D509,510			HZS8.2N(B2)	ZENER DIODE		
⚠ D509,510			MTZJ8.2(B)	ZENER DIODE		
D511			HSS104A	DIODE		
D511			1SS133	DIODE		
D513			HSS104A	DIODE		
D513			1SS133	DIODE		
D515-517			HSS104A	DIODE		
D515-517			1SS133	DIODE		
IC1			NJU7313AL	ANALOGUE IC		
IC2 ,3			NJM4565D-D	IC(OP AMP X2)		
IC4			M62430FP	ANALOGUE IC		
IC5			S-806D-Z	ANALOGUE IC		
IC9		*	BA3834SK	ANALOGUE IC		
IC10		*	M38199MF-075FP	MI-COM IC		

L : Scandinavia **K** : USA **P** : Canada **R** : Mexico **C** : China **I** : Malaysia
Y : PX(Far East, Hawaii) **T** : Europe **E** : Europe **G** : Germany **V** : China (Shanghai)
Y : AAFES(Europe) **X** : Australia **Q** : Russia **H** : Korea **M** : Other Areas

⚠ indicates safety critical components.

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

(22)

Ref. No	Address	New Parts	Parts No.	Description	Destination	Remarks
IC10		*	M38199MF-078FP	MI-COM IC		
IC11			SAA6579	ANALOGUE IC	TEQE2	
IC11			SAA6579/R	ANALOGUE IC	TEQE2	
⚠ IC12		*	TA79012SB	ANALOGUE IC		
⚠ IC13		*	TA7809SB	ANALOGUE IC		
IC15			TA78L012AP	ANALOGUE IC		
IC16,17			NJM4565D-D	IC(OP AMP X2)		
IC19			NJM4565D-D	IC(OP AMP X2)		
⚠ IC21			STK410-030D	HYBRID IC		
⚠ IC21			STK410-030K	HYBRID IC		
Q2			2SA1175(F,E)	TRANSISTOR		
Q2			2SA933AS(Q,R)	TRANSISTOR		
Q5			2SA992(F,E)	TRANSISTOR		
Q6 ,7			2SC1845(F,E)	TRANSISTOR		
Q8 ,9			2SA1175(F,E)	TRANSISTOR		
Q8 ,9			2SA933AS(Q,R)	TRANSISTOR		
⚠ Q10		*	2SB1417(Q,P)	TRANSISTOR		
⚠ Q10			2SB1640	TRANSISTOR		
Q11			2SA1175(F,E)	TRANSISTOR		
Q11			2SA933AS(Q,R)	TRANSISTOR		
Q12			2SC1740S(Q,R)	TRANSISTOR		
Q12			2SC2785(F,E)	TRANSISTOR		
⚠ Q13			2SD2137(Q,P)	TRANSISTOR		
⚠ Q13			2SD2525	TRANSISTOR		
⚠ Q14			2SB1417(Q,P)	TRANSISTOR		
⚠ Q14			2SB1640	TRANSISTOR		
⚠ Q15			2SD2137(Q,P)	TRANSISTOR		
⚠ Q15			2SD2525	TRANSISTOR		
Q16			2SC2003(L,K)	TRANSISTOR		
⚠ Q17			2SB1624	TRANSISTOR		
Q18			2SC1740S(Q,R)	TRANSISTOR		
Q18			2SC2785(F,E)	TRANSISTOR		
⚠ Q19			2SD2137(Q,P)	TRANSISTOR		
⚠ Q19			2SD2525	TRANSISTOR		
⚠ Q20 -22			2SC1740S(Q,R)	TRANSISTOR		
⚠ Q20 -22			2SC2785(F,E)	TRANSISTOR		
⚠ Q23			2SD2137(Q,P)	TRANSISTOR		
⚠ Q23			2SD2525	TRANSISTOR		
Q25 ,26			2SC2878(B)	TRANSISTOR		
Q27			2SC1740S(Q,R)	TRANSISTOR		
Q27			2SC2785(F,E)	TRANSISTOR		
Q501-503			2SC2878(B)	TRANSISTOR		
Q504			2SC1740S(Q,R)	TRANSISTOR	M2E2	
Q504			2SC1740S(Q,R)	TRANSISTOR	YMXTEQ	
Q504			2SC2785(F,E)	TRANSISTOR	M2E2	
Q504			2SC2785(F,E)	TRANSISTOR	YMXTEQ	
Q505-507			2SC2878(B)	TRANSISTOR		
Q509-511			2SC1845(F,E)	TRANSISTOR		
Q512			2SC1740S(Q,R)	TRANSISTOR		
Q512			2SC2785(F,E)	TRANSISTOR		
Q514			2SC1740S(Q,R)	TRANSISTOR		
Q514			2SC2785(F,E)	TRANSISTOR		
AUDIO UNIT (X09-600X-XX) : RXD-501/501E/501W/551/551E/551W/571S/A5						
C1 -5			CC45FSL1H221J	CERAMIC 220PF J	M2E2	

L : Scandinavia **K** : USA **P** : Canada **R** : Mexico **C** : China **I** : Malaysia
Y : PX(Far East, Hawaii) **T** : Europe **E** : Europe **G** : Germany **V** : China (Shanghai)
Y : AAFES(Europe) **X** : Australia **Q** : Russia **H** : Korea **M** : Other Areas

⚠ indicates safety critical components.

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

Ref. No	Address	New Parts	Parts No.	Description			Destination	Remarks
C1 -5			CC45FSL1H221J	CERAMIC	220PF	J	YMXTEQ	
C1 ,2			CC45FSL1H221J	CERAMIC	220PF	J	KP	
C5			CC45FSL1H221J	CERAMIC	220PF	J	KP	
C6			CK45FB1H102K	CERAMIC	1000PF	K		
C7			CF92FV1H224J	MF-C	0.22UF	J		
C11 ,12			CE04KW1C100M	ELECTRO	10UF	16WV		
C13 -16			CC45FSL1H101J	CERAMIC	100PF	J		
C17 ,18			CE04KW1C100M	ELECTRO	10UF	16WV		
C21 ,22			CF92FV1H104J	MF-C	0.10UF	J		
C23			CE04KW1C221M	ELECTRO	220UF	16WV		
C24 ,25			CF92FV1H104J	MF-C	0.10UF	J		
C26			CE04KW1C221M	ELECTRO	220UF	16WV		
C27			CE04KW1C101M	ELECTRO	100UF	16WV		
C28			CE04KW1C100M	ELECTRO	10UF	16WV		
C31			CE04KW1A101M	ELECTRO	100UF	10WV		
C32 -34			CE04KW1C100M	ELECTRO	10UF	16WV		
C35 ,36			CE04KW1H2R2M	ELECTRO	2.2UF	50WV		
C37 ,38			CE04KW1HR47M	ELECTRO	0.47UF	50WV		
C39			CK45FF1H472Z	CERAMIC	4700PF	Z		
C40			CE04KW1HR47M	ELECTRO	0.47UF	50WV		
C41			CK45FF1H103Z	CERAMIC	0.010UF	Z		
C42			CE04KW1V4R7M	ELECTRO	4.7UF	35WV		
C43 ,44			CE04KW1H3R3M	ELECTRO	3.3UF	50WV		
C45 ,46			CQ93FMG1H563J	MYLAR	0.056UF	J		
C47 ,48			CE04KW1HR33M	ELECTRO	0.33UF	50WV		
C49 ,50			CQ93FMG1H153J	MYLAR	0.015UF	J		
C51 ,52			CE04KW1H2R2M	ELECTRO	2.2UF	50WV		
C53 ,54			CQ93FMG1H682J	MYLAR	6800PF	J		
C55 ,56			CQ93FMG1H153J	MYLAR	0.015UF	J		
C57 ,58			CQ93FMG1H222J	MYLAR	2200PF	J		
C63 -68			CE04KW1H3R3M	ELECTRO	3.3UF	50WV		
C69			CC45FSL1H221J	CERAMIC	220PF	J		
C71 ,72			CE04KW1C100M	ELECTRO	10UF	16WV		
C73 ,74			CC45FSL1H101J	CERAMIC	100PF	J	TEQE2	
C77 ,78			CE04KW1C100M	ELECTRO	10UF	16WV		
C79			CK45FB1H102K	CERAMIC	1000PF	K		
C80			CK45FF1H103Z	CERAMIC	0.010UF	Z		
C81			CE04KW1J101M	ELECTRO	100UF	63WV		
C82 ,83			CE04KW1V470M	ELECTRO	47UF	35WV		
C88 ,89			CE04KW1V222M	ELECTRO	2200UF	35WV		
C90 ,91			C90-3791-05	ALMINIUM ELECTROLYTIC C.				
C94			CE04KW1C221M	ELECTRO	220UF	16WV		
C95			CE04KW1V4R7M	ELECTRO	4.7UF	35WV		
C96			CE04KW1A470M	ELECTRO	47UF	10WV		
C97			CE04KW1V4R7M	ELECTRO	4.7UF	35WV		
C98 ,99			CE04KW1C470M	ELECTRO	47UF	16WV		
C100			CK45FF1H103Z	CERAMIC	0.010UF	Z		
C101			CE04KW1V4R7M	ELECTRO	4.7UF	35WV		
C102			CE04KW1A221M	ELECTRO	220UF	10WV		
C103			CE04KW1C220M	ELECTRO	22UF	16WV		
C104			CE04KW1H010M	ELECTRO	1.0UF	50WV		
C106			CE04KW1V4R7M	ELECTRO	4.7UF	35WV		
C108,109			CF92FV1H104J	MF-C	0.10UF	J		
C110			CE04KW1C470M	ELECTRO	47UF	16WV		
C111,112			CE04KW1H010M	ELECTRO	1.0UF	50WV		

L: Scandinavia **K**: USA **P**: Canada **R**: Mexico **C**: China **I**: Malaysia
Y: PX(Far East, Hawaii) **T**: Europe **E**: Europe **G**: Germany **V**: China (Shanghai)
Y: AAFES(Europe) **X**: Australia **Q**: Russia **H**: Korea **M**: Other Areas

⚠ indicates safety critical components.

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

Ref. No	Address	New Parts	Parts No.	Description			Destination	Remarks
C113			CE04KW0J471M	ELECTRO	470UF	6.3WV		
C114			CK45FF1H103Z	CERAMIC	0.010UF	Z		
C119,120			CE04KW1C100M	ELECTRO	10UF	16WV		
C125,126			CE04KW1V4R7M	ELECTRO	4.7UF	35WV		
C128-130			CE04KW1H0R1M	ELECTRO	0.1UF	50WV		
C131			CE04KW1C100M	ELECTRO	10UF	16WV		
C139,140			CE04KW1C100M	ELECTRO	10UF	16WV		
C141			CE04KW1V4R7M	ELECTRO	4.7UF	35WV	TEQE2	
C142			CC45FSL1H331J	CERAMIC	330PF	J	TEQE2	
C143			CK45FB1H561K	CERAMIC	560PF	K	TEQE2	
C144			CC45FCH1H470J	CERAMIC	47PF	J	TEQE2	
C145			CC45FCH1H220J	CERAMIC	22PF	J	TEQE2	
C146			CK45FF1H103Z	CERAMIC	0.010UF	Z	TEQE2	
C147			CE04KW1A470M	ELECTRO	47UF	10WV	TEQE2	
C148,149			CK45FF1H103Z	CERAMIC	0.010UF	Z	TEQE2	
C151,152			CC45FSL1H180J	CERAMIC	18PF	J		
C153			CE04KW1C470M	ELECTRO	47UF	16WV		
C154			CE04KW1V100M	ELECTRO	10UF	35WV		
C155			CE04KW1V330M	ELECTRO	33UF	35WV		
C159,160			CC45FSL1H220J	CERAMIC	22PF	J	TEQE2	
C497,498			CK45FB1H102K	CERAMIC	1000PF	K		
C500			CK45FF1H103Z	CERAMIC	0.010UF	Z	TEQE2	
C501,502			CE04KW1H2R2M	ELECTRO	2.2UF	50WV		
C503,504			CC45FSL1H470J	CERAMIC	47PF	J		
C506			CE04KW1V220M	ELECTRO	22UF	35WV	YMXM2	
C509,510			CC45FSL1H100D	CERAMIC	10PF	D		
C513,514			CK45FF1H472Z	CERAMIC	4700PF	Z		
C517,518			CF92FV1H104J	MF-C	0.10UF	J	KP	
C517,518			CF92FV1H224J	MF-C	0.22UF	J	M2E2	
C517,518			CF92FV1H224J	MF-C	0.22UF	J	YMXTEQ	
C521,522			CF92FV1H224J	MF-C	0.22UF	J	M2E2	
C521,522			CF92FV1H224J	MF-C	0.22UF	J	YMXTEQ	
C525,526			CK45FF1H472Z	CERAMIC	4700PF	Z		
C529,530			CC45FSL1H101J	CERAMIC	100PF	J	TEQE2	
C531,532			CE04KW1A101M	ELECTRO	100UF	10WV		
C535-538			CE04KW1J100M	ELECTRO	10UF	63WV		
CN5			E40-3257-05	PIN ASSY				
CN6			E40-3262-05	PIN ASSY				
CN7			E40-3247-05	PIN ASSY				
CN11			E40-8053-05	PIN ASSY				
CN12		*	E40-8286-05	FLAT CABLE CONNECTOR			YMXM2	
CN13			E40-3256-05	PIN ASSY				
CN14			E40-8253-05	FLAT CABLE CONNECTOR				
CN15			E40-3251-05	PIN ASSY				
CN19		*	E40-8120-05	FLAT CABLE CONNECTOR				
CN21		*	E40-8257-05	FLAT CABLE CONNECTOR				
CN22			E40-4632-05	PIN ASSY				
CN23			E40-4295-05	FLAT CABLE CONNECTOR			YMXM2	
CN24			E40-3256-05	PIN ASSY				
J1		*	E63-1038-05	PHONO JACK			KP	
J2			E70-0057-05	LOCK TERMINAL BOARD				
J3			E70-0045-05	LOCK TERMINAL BOARD			YMXM2	
J4			E63-0116-05	PHONO JACK				
J5		*	E63-1037-05	PHONO JACK			M2E2	

L: Scandinavia **K**: USA **P**: Canada **R**: Mexico **C**: China **I**: Malaysia
Y: PX(Far East, Hawaii) **T**: Europe **E**: Europe **G**: Germany **V**: China (Shanghai)
Y: AAFES(Europe) **X**: Australia **Q**: Russia **H**: Korea **M**: Other Areas

⚠ indicates safety critical components.

PARTS LIST

RXD-501/551/571/A5/701/751/771/A8

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

25

Ref. No	Address	New Parts	Parts No.	Description	Destination	Remarks
J5		*	E63-1037-05	PHONO JACK	YMXTEQ	
-			F20-1405-15	INSULATING SHEET		
⚠ F1			F06-2021-05	FUSE (SEMKO) (250V T2AL)	XTEQE2	
⚠ F1			F50-0073-05	FUSE(5X20)	KP	
⚠ F1 ,2			F06-2021-05	FUSE (SEMKO) (250V T2AL)	YMM2	
⚠ F3			F50-0062-05	FUSE(5X20)	KP	
CN1 -4			J13-0075-05	FUSE CLIP	YMM2	
CN1 ,2			J13-0075-05	FUSE CLIP	KPX	
CN1 ,2			J13-0075-05	FUSE CLIP	TEQE2	
CN31,32			J13-0075-05	FUSE CLIP	KP	
E21 -24			J11-0809-05	WIRE CLAMPER	EQE2	
E21 -24			J11-0809-05	WIRE CLAMPER	KPT	
E21 -27			J11-0809-05	WIRE CLAMPER	YMX	
L1			L40-1091-17	SMALL FIXED INDUCTOR(1UH)	TEQE2	
L2			L40-1001-17	SMALL FIXED INDUCTOR(10UH,K)	TEQE2	
L3 ,4			L39-1373-05	PHASE COMPENSATION COIL		
X1			L78-0605-05	RESONATOR (8.38MHZ)		
X2			L77-2173-05	CRYSTAL RESONATOR(32.768KHZ)		
X3			L77-2002-05	CRYSTAL RESONATOR(4.332MHZ)	TEQE2	
⚠ R3			RD14NB2E680J	RD 68 J 1/4W		
⚠ R45			RD14NB2E1R0J	RD 1 J 1/4W		
⚠ R46			RD14NB2E472J	RD 4.7K J 1/4W		
R48			RD14NB2E8R2J	RD 8.2 J 1/4W		
R56			RD14NB2E332J	RD 3.3K J 1/4W		
R63			RD14NB2E102J	RD 1.0K J 1/4W		
⚠ R75			RD14NB2E100J	RD 10 J 1/4W		
R80			RS14KB3A222J	FL-PROOF RS 2.2K J 1W		
R96			RS14KB3D332J	FL-PROOF RS 3.3K J 2W		
⚠ R118,119			RD14NB2E1R0J	RD 1 J 1/4W		
⚠ R129,130			RD14NB2E1R0J	RD 1 J 1/4W		
⚠ R131			RD14BB2C100J	RD 10 J 1/6W		
⚠ R142			RD14BB2C101J	RD 100 J 1/6W		
⚠ R187,188			RS14KB3D4R7J	FL-PROOF RS 4.7 J 2W		
R531,532			R92-1866-05	METALFILM 0.1 2W		
R543,544			RS14KB3D4R7J	FL-PROOF RS 4.7 J 2W		
⚠ R560			RS14KB3A5R6J	FL-PROOF RS 5.6 J 1W		
⚠ R565,566			RD14NB2E101J	RD 100 J 1/4W	EQE2	
⚠ R565,566			RD14NB2E101J	RD 100 J 1/4W	KPT	
⚠ R566			RD14NB2E101J	RD 100 J 1/4W	YMXM2	
⚠ R578			RS14KB3D470J	FL-PROOF RS 47 J 2W		
R583,584			RD14NB2E4R7J	RD 4.7 J 1/4W		
R598			RS14KB3D470J	FL-PROOF RS 47 J 2W		
⚠ R599			R92-1844-05	CARBON 3.3M J 1/2W	KP	
VR1		*	R31-0096-05	VARIABLE RESISTOR		
⚠ K1 ,2			S76-0060-05	MAGNETIC RELAY		
⚠ K1 ,2		*	S76-0069-15	MAGNETIC RELAY		
K11			S76-0076-05	MAGNETIC RELAY		
K13			S76-0076-05	MAGNETIC RELAY		
⚠ S1			S62-0001-05	SLIDE SWITCH	YMM2	
S2			S62-0055-05	SLIDE SWITCH	TMXM2	
D1			HZS5.1N(B2)	ZENER DIODE		
D1			MTZJ5.1(B)	ZENER DIODE		

L: Scandinavia **K**: USA **P**: Canada **R**: Mexico **C**: China **I**: Malaysia
Y: PX(Far East, Hawaii) **T**: Europe **E**: Europe **G**: Germany **V**: China (Shanghai)
Y: AAFES(Europe) **X**: Australia **Q**: Russia **H**: Korea **M**: Other Areas

⚠ indicates safety critical components.

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

26

Ref. No	Address	New Parts	Parts No.	Description	Destination	Remarks
D2			HSS104A	DIODE		
D2			1SS133	DIODE		
D3			HZS5.1N(B2)	ZENER DIODE		
D3			MTZJ5.1(B)	ZENER DIODE		
D4			HZS3.9N(B2)	ZENER DIODE		
D4			MTZJ3.9(B)	ZENER DIODE		
D5 -7			HSS104A	DIODE	EQE2	
D5 -7			HSS104A	DIODE	KPYMXT	
D5 -7			1SS133	DIODE	EQE2	
D5 -7			1SS133	DIODE	KPYMXT	
D5 -8			HSS104A	DIODE	M2	
D5 -8			1SS133	DIODE	M2	
D10 -12			HSS104A	DIODE	TQ	
D10 -12			1SS133	DIODE	TQ	
D10 ,11			HSS104A	DIODE	EE2	
D10 ,11			1SS133	DIODE	EE2	
D11			HSS104A	DIODE	KP	
D11			1SS133	DIODE	KP	
D11 ,12			HSS104A	DIODE	YMXM2	
D11 ,12			1SS133	DIODE	YMXM2	
D14			HSS104A	DIODE	EQM2E2	
D14			HSS104A	DIODE	YMX	
D14			1SS133	DIODE	EQM2E2	
D14			1SS133	DIODE	YMX	
D16			HSS104A	DIODE	TEQE2	
D16			1SS133	DIODE	TEQE2	
D17 ,18			S5688B	DIODE		
D17 ,18			1SR139-400	DIODE		
D19			HZS16N(B2)	ZENER DIODE		
D19			MTZJ16(B)	ZENER DIODE		
D20			HZS18N(B2)	ZENER DIODE		
D20			MTZJ18(B)	ZENER DIODE		
D21			HSS104A	DIODE		
D21			1SS133	DIODE		
⚠ D22 ,23			D4SBL20UF03	DIODE		
⚠ D24 -27			S5688B	DIODE		
⚠ D24 -27			1SR139-400	DIODE		
⚠ D28 ,29			HSS104A	DIODE		
⚠ D28 ,29			1SS133	DIODE		
D30			HZS2.7N(B2)	ZENER DIODE		
D30			MTZJ2.7(B)	ZENER DIODE		
D31			HZS6.2N(B2)	ZENER DIODE		
D31			MTZJ6.2(B)	ZENER DIODE		
⚠ D32			HSS104A	DIODE		
⚠ D32			1SS133	DIODE		
D33			HZS5.6N(B2)	ZENER DIODE		
D33			MTZJ5.6(B)	ZENER DIODE		
D34			HZS5.1N(B2)	ZENER DIODE		
D34			MTZJ5.1(B)	ZENER DIODE		
D35			HZS5.6N(B2)	ZENER DIODE		
D35			MTZJ5.6(B)	ZENER DIODE		
D36			HZS20N(B2)	ZENER DIODE		
D36			MTZJ20(B)	ZENER DIODE		
D37 -40			HSS104A	DIODE		
D37 -40			1SS133	DIODE		

L: Scandinavia **K**: USA **P**: Canada **R**: Mexico **C**: China **I**: Malaysia
Y: PX(Far East, Hawaii) **T**: Europe **E**: Europe **G**: Germany **V**: China (Shanghai)
Y: AAFES(Europe) **X**: Australia **Q**: Russia **H**: Korea **M**: Other Areas

⚠ indicates safety critical components.

✻ New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

Ref. No	Address	New Parts	Parts No.	Description	Destination	Remarks
D45 -49			HSS104A	DIODE		
D45 -49			1SS133	DIODE		
D511			HSS104A	DIODE		
D511			1SS133	DIODE		
D513			HSS104A	DIODE		
D513			1SS133	DIODE		
D515,516			HSS104A	DIODE		
D515,516			1SS133	DIODE		
IC1			NJU7313AL	ANALOGUE IC		
IC2 ,3			NJM4565D-D	IC(OP AMP X2)		
IC4			M62430FP	ANALOGUE IC		
IC5			S-806D-Z	ANALOGUE IC		
IC9		✻	BA3834SK	ANALOGUE IC		
IC10		✻	M38199MF-075FP	MI-COM IC		
IC10		✻	M38199MF-078FP	MI-COM IC		
IC11			SAA6579	ANALOGUE IC	TEQE2	
IC11			SAA6579/R	ANALOGUE IC	TEQE2	
⚠ IC12		✻	TA79012SB	ANALOGUE IC		
⚠ IC13		✻	TA7809SB	ANALOGUE IC		
⚠ IC15			TA78L012AP	ANALOGUE IC		
IC19			NJM4565D-D	IC(OP AMP X2)		
⚠ IC21		✻	STK407-710K	HYBRID IC		
⚠ Q1			2SB1624	TRANSISTOR	YMXM2	
Q2			2SA1175(F,E)	TRANSISTOR		
Q2			2SA933AS(Q,R)	TRANSISTOR		
Q5			2SA992(F,E)	TRANSISTOR		
Q6 ,7			2SC1845(F,E)	TRANSISTOR		
Q8 ,9			2SA1175(F,E)	TRANSISTOR		
Q8 ,9			2SA933AS(Q,R)	TRANSISTOR		
⚠ Q10		✻	2SB1417(Q,P)	TRANSISTOR		
⚠ Q10			2SB1640	TRANSISTOR		
Q11			2SA1175(F,E)	TRANSISTOR		
Q11			2SA933AS(Q,R)	TRANSISTOR		
Q12			2SC1740S(Q,R)	TRANSISTOR		
Q12			2SC2785(F,E)	TRANSISTOR		
⚠ Q13			2SD2137(Q,P)	TRANSISTOR		
⚠ Q13			2SD2525	TRANSISTOR		
⚠ Q14		✻	2SB1417(Q,P)	TRANSISTOR		
⚠ Q14			2SB1640	TRANSISTOR		
⚠ Q15			2SD2137(Q,P)	TRANSISTOR		
⚠ Q15			2SD2525	TRANSISTOR		
Q16			2SC2003(L,K)	TRANSISTOR		
⚠ Q17			2SB1624	TRANSISTOR	EQE2	
⚠ Q17			2SB1624	TRANSISTOR	KPT	
Q18			2SC1740S(Q,R)	TRANSISTOR		
Q18			2SC2785(F,E)	TRANSISTOR		
⚠ Q19			2SD2137(Q,P)	TRANSISTOR		
⚠ Q19			2SD2525	TRANSISTOR		
⚠ Q20 -22			2SC1740S(Q,R)	TRANSISTOR		
⚠ Q20 -22			2SC2785(F,E)	TRANSISTOR		
⚠ Q23			2SD2137(Q,P)	TRANSISTOR	EQE2	
⚠ Q23			2SD2137(Q,P)	TRANSISTOR	KPT	
⚠ Q23			2SD2525	TRANSISTOR	EQE2	
⚠ Q23			2SD2525	TRANSISTOR	KPT	
Q23 ,24			2SD2137(Q,P)	TRANSISTOR	YMXM2	

L : Scandinavia **K** : USA **P** : Canada **R** : Mexico **C** : China **I** : Malaysia
Y : PX(Far East, Hawaii) **T** : Europe **E** : Europe **G** : Germany **V** : China (Shanghai)
Y : AAFES(Europe) **X** : Australia **Q** : Russia **H** : Korea **M** : Other Areas

⚠ indicates safety critical components.

✻ New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

Ref. No	Address	New Parts	Parts No.	Description	Destination	Remarks
Q23 ,24			2SD2525	TRANSISTOR	YMXM2	
Q25 ,26			2SC2878(B)	TRANSISTOR		
Q27			2SC1740S(Q,R)	TRANSISTOR		
Q27			2SC2785(F,E)	TRANSISTOR		
Q501,502			2SC2878(B)	TRANSISTOR		
Q505,506			2SC2878(B)	TRANSISTOR		
Q509,510			2SC1845(F,E)	TRANSISTOR		
Q512			2SC1740S(Q,R)	TRANSISTOR		
Q512			2SC2785(F,E)	TRANSISTOR		
Q514			2SC1740S(Q,R)	TRANSISTOR		
Q514			2SC2785(F,E)	TRANSISTOR		

DISPLAY UNIT (X14-474X-XX)

D20 ,21			B30-2468-05	LED			EQE2	
D20 ,21			B30-2468-05	LED			KPT	
D20 ,21			B30-2508-05	LED(AMBER,D=3,P=2)			YMXM2	
D30 -37			B30-2468-05	LED			EQE2	
D30 -37			B30-2508-05	LED(AMBER,D=3,P=2)			YMXM2	
C1 ,2			CE04LW1H010M	ELECTRO	1.0UF	50WV		
C3			CE04LW0J221M	ELECTRO	220UF	6.3WV		
C4			CK45FF1H103Z	CERAMIC	0.010UF	Z		
C5			CE04LW1V330M	ELECTRO	33UF	35WV		
C6			CK45FF1H103Z	CERAMIC	0.010UF	Z		
C7			CE04LW1A470M	ELECTRO	47UF	10WV		
C8 ,9			C91-0757-05	CERAMIC	1000PF	K		
C20 ,21			C91-0757-05	CERAMIC	1000PF	K		
C22			CE04LW1H4R7M	ELECTRO	4.7UF	50WV		
C24 ,25			CK45FF1H103Z	CERAMIC	0.010UF	Z		
C51 -53			CK45FF1H103Z	CERAMIC	0.010UF	Z		
C101,102			CE04LW1V220M	ELECTRO	22UF	35WV	YMXM2	
C103,104			CC45FSL1H331J	CERAMIC	330PF	J	YMXM2	
C105			CK45FF1H103Z	CERAMIC	0.010UF	Z	YMXM2	
C106			CQ93FMG1H153J	MYLAR	0.015UF	J	YMXM2	
C107			CE04LW1V4R7M	ELECTRO	4.7UF	35WV	YMXM2	
C108			CK45FB1H102K	CERAMIC	1000PF	K	YMXM2	
C109			CE04LW1H010M	ELECTRO	1.0UF	50WV	YMXM2	
C110			CC45FSL1H101J	CERAMIC	100PF	J	YMXM2	
C111			CE04LW1C470M	ELECTRO	47UF	16WV	YMXM2	
C125			CE04LW1C470M	ELECTRO	47UF	16WV	YMXM2	
CN1			E40-4725-05	FLAT CABLE CONNECTOR				
CN2			E40-8267-05	FLAT CABLE CONNECTOR				5
CN2			E40-8268-05	FLAT CABLE CONNECTOR				7
CN3			E40-8287-05	FLAT CABLE CONNECTOR			YMXM2	
CN5			E40-4721-05	FLAT CABLE CONNECTOR				5
CN5		✻	E40-4723-05	FLAT CABLE CONNECTOR				7
J1 ,2			E11-0169-05	PHONE JACK			YMXM2	
J3			E11-0280-05	PHONE JACK				
-			J19-5756-03	HOLDER				
L1			L40-1001-17	SMALL FIXED INDUCTOR(10UH,K)				
X1			L78-0284-05	RESONATOR (5MHZ)				
CP1		✻	R90-0977-05	MULTIPLE RESISTOR				
CP2			R90-0908-05	MULTI-COMP	47KX10			
CP3			R90-0804-05	MULTI-COMP	47KX8	J 1/4W		

L : Scandinavia **K** : USA **P** : Canada **R** : Mexico **C** : China **I** : Malaysia
Y : PX(Far East, Hawaii) **T** : Europe **E** : Europe **G** : Germany **V** : China (Shanghai) **5**: RXD-501/501E/501W/551/551E/551W/571S/A5
Y : AAFES(Europe) **X** : Australia **Q** : Russia **H** : Korea **M** : Other Areas **7**: RXD-701/701E/701W/751/751E/751W/771S/A8

⚠ indicates safety critical components.

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

29

Ref. No	Address	New Parts	Parts No.	Description	Destination	Remarks
CP4			R90-0819-05	MULTI-COMP 47KX6 J 1/6W		
R23			RD14NB2E100J	RD 10 J 1/4W		
R151,152			RS14KB3D471J	FL-PROOF RS 470 J 2W		
VR1		*	R31-0097-05	VARIABLE RESISTOR	YMXM2	
S2			S70-0031-05	TACT SWITCH		
S11			S70-0031-05	TACT SWITCH		
S13 -44			S70-0031-05	TACT SWITCH		
S1			T99-0559-05	ROTARY ENCODER		
S45			T99-0530-05	ROTARY ENCODER		
D1			HZS6.8N(B)	ZENER DIODE		
D1			MTZJ6.8	ZENER DIODE		
D2			S5688B	DIODE		
D3 ,4			HSS104A	DIODE		
D3 ,4			1SS133	DIODE		
D5			HZS6.8N(B)	ZENER DIODE		
D5			MTZJ6.8	ZENER DIODE		
D101,102			HSS104A	DIODE	YMXM2	
D101,102			1SS133	DIODE	YMXM2	
D103-106			HZS5.6N(B)	ZENER DIODE	YMXM2	
D103-106			MTZJ5.6	ZENER DIODE	YMXM2	
ED1		*	BJ594GK	INDICATOR TUBE		
IC1		*	UPD780204-038	MI-COM IC		
IC101			NJM4565D-D	IC(OP AMP X2)	YMXM2	
Q1 -8		*	KTC3199(Y,GR)	TRANSISTOR		
Q1 -8			2SC1740S(Q,R)	TRANSISTOR		
Q9			2SC2003(L,K)	TRANSISTOR		
Q10 ,11		*	KTA1267(Y,GR)	TRANSISTOR		
Q10 ,11			2SA933AS(Q,R)	TRANSISTOR		
Q12			KTC3199(Y,GR)	TRANSISTOR		
Q12			2SC1740S(Q,R)	TRANSISTOR		
Q23 -28		*	KTC3199(Y,GR)	TRANSISTOR		
Q23 -28			2SC1740S(Q,R)	TRANSISTOR		
A1			W02-2561-05	ELECTRIC CIRCUIT MODULE		

CASSETTE MECHANISM UNIT (X28-2960-10)

C1 ,2			CK45FB1H561K	CERAMIC 560PF K		
C3 ,4			CE04LW1C100M	ELECTRO 10UF 16WV		
C5 ,6			CK45FB1H391K	CERAMIC 390PF K		
C7 ,8			CE04LW1C220M	ELECTRO 22UF 16WV		
C9 ,10			CQ93FMG1H223J	MYLAR 0.022UF J		
C11 ,12			CK45FB1H332K	CERAMIC 3300PF K		
C15 ,16			CE04LW1H010M	ELECTRO 1.0UF 50WV		
C17 ,18			CK45FB1H471K	CERAMIC 470PF K		
C19 ,20			CE04LW1C100M	ELECTRO 10UF 16WV		
C21 ,22			CK45FB1H391K	CERAMIC 390PF K		
C23 ,24			CE04LW1C220M	ELECTRO 22UF 16WV		
C25 ,26			CQ93FMG1H223J	MYLAR 0.022UF J		
C27 ,28			CK45FB1H332K	CERAMIC 3300PF K		
C29 ,30			CE04LW1H010M	ELECTRO 1.0UF 50WV		
C31 ,32			CK45FB1H682K	CERAMIC 6800PF K		
C33 ,34			CK45FB1H102K	CERAMIC 1000PF K		
C35 ,36			CE04LW1HR47M	ELECTRO 0.47UF 50WV		
C37 ,38			CE04LW1H2R2M	ELECTRO 2.2UF 50WV		
C39 ,40			CE04LW1H0R1M	ELECTRO 0.1UF 50WV		

L: Scandinavia **K**: USA **P**: Canada **R**: Mexico **C**: China **I**: Malaysia
Y: PX(Far East, Hawaii) **T**: Europe **E**: Europe **G**: Germany **V**: China (Shanghai)
Y: AAFES(Europe) **X**: Australia **Q**: Russia **H**: Korea **M**: Other Areas

⚠ indicates safety critical components.

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

30

Ref. No	Address	New Parts	Parts No.	Description	Destination	Remarks
C41 ,42			CE04LW1C100M	ELECTRO 10UF 16WV		
C43 ,44			CE04LW1H2R2M	ELECTRO 2.2UF 50WV		
C45 ,46			CE04LW1HR47M	ELECTRO 0.47UF 50WV		
C47 ,48			CE04LW1H2R2M	ELECTRO 2.2UF 50WV		
C49 -52			CC45FSL1H221J	CERAMIC 220PF J		
C53 ,54			CQ93FMG1H472J	MYLAR 4700PF J		
C55			CE04LW1H010M	ELECTRO 1.0UF 50WV		
C56			CQ93FMG1H103J	MYLAR 0.010UF J		
C57			CE04LW1H0R1M	ELECTRO 0.1UF 50WV		
C58			CE04LW1C101M	ELECTRO 100UF 16WV		
C59 ,60			CE04LW1C220M	ELECTRO 22UF 16WV		
C61 ,62			CE04LW1C101M	ELECTRO 100UF 16WV		
C63			CE04LW1V4R7M	ELECTRO 4.7UF 35WV		
C64			CQ93FMG1H472J	MYLAR 4700PF J		
C65			CQ93FMG1H103J	MYLAR 0.010UF J		
C66			CQ93FMG1H472J	MYLAR 4700PF J		
C67			CQ93HP2A103J	MYLAR 0.010UF J		
C68			CK45FB2H471K	CERAMIC 470PF K		
C69			CE04LW1H010M	ELECTRO 1.0UF 50WV		
C70 ,71			CE04LW1C100M	ELECTRO 10UF 16WV		
C74			CK45FB1H471K	CERAMIC 470PF K		
C75 ,76			CK45FF1H103Z	CERAMIC 0.010UF Z		
CN1			E40-3247-05	PIN ASSY		
CN2			E40-3250-05	PIN ASSY		
CN3 ,4		*	E40-8257-05	FLAT CABLE CONNECTOR		
CN5			E40-8253-05	FLAT CABLE CONNECTOR		
CN6			E40-4977-05	PIN ASSY		
E2			J11-0809-05	WIRE CLAMPER		
L1 ,2			L79-1242-05	LC FILTER		
L5 ,6			L40-1035-29	SMALL FIXED INDUCTOR(10MH, J)		
L7			L32-0592-05	BIAS OSCILATING COIL		
⚠ R43			RD14NB2E100J	RD 10 J 1/4W		
⚠ R53			RD14NB2E100J	RD 10 J 1/4W		
⚠ R62			RD14NB2E101J	RD 100 J 1/4W		
VR1 ,2			R32-0030-05	SEMI FIXED VARIABLE RESISTOR		
VR3 ,4			R32-0041-05	SEMI FIXED VARIABLE RESISTOR		
VR5 ,6			R32-0036-05	SEMI FIXED VARIABLE RESISTOR		
VR7 ,8			R32-0030-05	SEMI FIXED VARIABLE RESISTOR		
D1 -4			HSS104A	DIODE		
D1 -4			1SS133	DIODE		
D5			HZS2.7N(B2)	ZENER DIODE		
D5			MTZJ2.7(B)	ZENER DIODE		
IC1			HA12209F	ANALOGUE IC		
IC2 ,3			BA328	IC		
IC4			BA3126N	ANALOGUE IC		
IC5			BA10393	ANALOGUE IC		
IC6			TC74HC166AP	IC(8BIT SHIFT REGISTER)		
Q1 -4			2SC3246	TRANSISTOR		
⚠ Q5			2SC2003(L,K)	TRANSISTOR		
Q7 ,8			2SC1740S(Q,R)	TRANSISTOR		
Q7 ,8			2SC2785(F,E)	TRANSISTOR		
Q9			DTA124ESA	DIGITAL TRANSISTOR		
Q9			UN4112	DIGITAL TRANSISTOR		

L: Scandinavia **K**: USA **P**: Canada **R**: Mexico **C**: China **I**: Malaysia
Y: PX(Far East, Hawaii) **T**: Europe **E**: Europe **G**: Germany **V**: China (Shanghai)
Y: AAFES(Europe) **X**: Australia **Q**: Russia **H**: Korea **M**: Other Areas

⚠ indicates safety critical components.

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

31

Ref. No	Address	New Parts	Parts No.	Description			Destination	Remarks
Q10 ,11			2SC1845(F,E)	TRANSISTOR				
Q12			DTC124ESA	DIGITAL TRANSISTOR				
Q12			UN4212	DIGITAL TRANSISTOR				
CD MECHANISM UNIT (X32-359X-XX)								
C1			CE04KW1A101M	ELECTRO	100UF	10WV		
C2			CE04KW0J331M	ELECTRO	330UF	6.3WV		
C3			CE04KW1A101M	ELECTRO	100UF	10WV		
C4			CC45FCH1H680J	CERAMIC	68PF	J		
C5			CF92FV1H474J	MF-C	0.47UF	J		
C6			CK45FF1H103Z	CERAMIC	0.010UF	Z		
C7			CQ93FMG1H332J	MYLAR	3300PF	J		
C8			CQ93FMG1H152J	MYLAR	1500PF	J		
C9			CQ93FMG1H473J	MYLAR	0.047UF	J		
C10			CK45FF1H103Z	CERAMIC	0.010UF	Z		
C11			CE04KW0J331M	ELECTRO	330UF	6.3WV		
C12			CK45FF1H103Z	CERAMIC	0.010UF	Z		
C13			CE04KW0J331M	ELECTRO	330UF	6.3WV		
C14			CF92FV1H104J	MF-C	0.10UF	J		
C15			CE04KW1A101M	ELECTRO	100UF	10WV		
C16			CK45FB1H471K	CERAMIC	470PF	K		
C17			CE04HW1E4R7M	NP-ELEC	4.7UF	25WV		
C18			CC45FSL1H221J	CERAMIC	220PF	J		
C19 ,20			CC45FSL1H101J	CERAMIC	100PF	J		
C21			CE04KW1A101M	ELECTRO	100UF	10WV		
C22			CQ93FMG1H333J	MYLAR	0.033UF	J		
C23 ,24			CC45FCH1H560J	CERAMIC	56PF	J		M2E2
C23 ,24			CC45FCH1H560J	CERAMIC	56PF	J		YMXTEQ
C25			CC45FCH1H100D	CERAMIC	10PF	D		M2E2
C25			CC45FCH1H100D	CERAMIC	10PF	D		YMXTEQ
C30			CF92FV1H224J	MF-C	0.22UF	J		
C31 ,32			CQ93FMG1H102J	MYLAR	1000PF	J		
C37 ,38			CQ93FMG1H222J	MYLAR	2200PF	J		M2E2
C37 ,38			CQ93FMG1H222J	MYLAR	2200PF	J		YMXTEQ
C39 ,40			CQ93FMG1H391K	MYLAR	390PF	K		M2E2
C39 ,40			CQ93FMG1H391K	MYLAR	390PF	K		YMXTEQ
C41 ,42			CQ93FMG1H103J	MYLAR	0.010UF	J		
C43 ,44			CE04KW1H2R2M	ELECTRO	2.2UF	50WV		
C45 -47			CK45FF1H103Z	CERAMIC	0.010UF	Z		
C48			CK45FB1H102K	CERAMIC	1000PF	K		
C49			CC45FSL1H151J	CERAMIC	150PF	J		
C50			CK45FB1H681K	CERAMIC	680PF	K		
C51			CE04KW1H100M	ELECTRO	10UF	50WV		M2E2
C51			CE04KW1H100M	ELECTRO	10UF	50WV		YMXTEQ
C62			CE04KW1A101M	ELECTRO	100UF	10WV		
C63 ,64			CE04HW1H010M	NP-ELEC	1.0UF	50WV		
CN1			E40-8151-05	FLAT CABLE CONNECTOR				
CN2			E40-4377-05	PIN ASSY				
CN3			E40-4763-05	PIN ASSY				
CN4			E40-3247-05	PIN ASSY				
CN5			E40-4762-05	PIN ASSY				
CN6		*	E40-8255-05	FLAT CABLE CONNECTOR				
CN7			E40-4979-05	PIN ASSY				
E2 -6			J11-0809-05	WIRE CLAMPER				

L : Scandinavia **K** : USA **P** : Canada **R** : Mexico **C** : China **I** : Malaysia
Y : PX(Far East, Hawaii) **T** : Europe **E** : Europe **G** : Germany **V** : China (Shanghai)
Y : AAFES(Europe) **X** : Australia **Q** : Russia **H** : Korea **M** : Other Areas

⚠ indicates safety critical components.

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

32

Ref. No	Address	New Parts	Parts No.	Description	Destination	Remarks
L1			L40-1001-17	SMALL FIXED INDUCTOR(10UH,K)		
X1			L77-2190-05	CRYSTAL RESONATOR(16.9344MHZ)	M2E2	
X1			L77-2190-05	CRYSTAL RESONATOR(16.9344MHZ)	YMXTEQ	
X1			L78-0299-05	RESONATOR (16.93M)	KP	
VR1			R12-3101-05	TRIMMING POT.		
D1 -6			HSS104A	DIODE		
D1 -6			1SS133	DIODE		
IC1			CXA1571M	ANALOGUE IC		
IC2			CXD2587Q	MOS-IC		
IC3			BA5979S	ANALOGUE IC		
IC4 ,5			TA8409S	MOS-IC		
Q1			2SA954(L,K)	TRANSISTOR		
Q6 ,7			DTC124ESA	DIGITAL TRANSISTOR		
Q6 ,7			UN4212	DIGITAL TRANSISTOR		
Q8			2SB764(E,F)	TRANSISTOR		
A1			W02-1114-05	OSCILLATING MODULE	E	
CD MECHANISM UNIT (D40-1590-08)						
101	3B		A10-3119-08	CHASIS (MAIN)		
102	3A		A15-0089-08	FRAME (MD-B)		
105	2A		D10-3538-08	SLIDER (LIFT)		
107	2B		D10-3459-08	LEVER (LOCK)		
108	2A		D10-3638-08	LEVER (BRAKE)		
109	2B		D10-3496-18	FRICTION ARM ASSY		
110	2A		D10-3659-04	FEED SHAFT		
113	1A		D13-1599-08	GEAR (IDLER)		
114	2B		D13-1600-08	GEAR (LOAD)		
115	2B		D13-1601-08	GEAR (CENTER)		
117	3A		D13-1603-08	CAM GEAR(UP/DOWN)		
118	1A		D13-1604-08	GEAR (HELICAL)		
119	2A		D13-1765-03	GEAR		
120	2B,3B		D14-0361-08	ROLLER (TRAY)		
122	2B		D15-0366-08	PULLEY (LOAD)		
123	2B		D16-0363-08	DRIVE BELT		
125	2B		D21-1762-08	SHAFT (PULLEY)		
126	2A		D13-1763-04	GEAR (MIDLLE)		
132	2A,2B		E35-0811-08	3P WIRE		
133	3B		E35-1184-08	6P WIRE		
134	2A		E35-1185-08	6P FLAT WIRE		
135	3A		E35-1186-08	6P WIRE (TU-D)		
136	3A		E35-1187-08	16P FLAT CABLE		
137	3A		E40-3264-05	CONNECTOR		
140	1A		F07-0773-08	COVER (TRAY)		
141	2A		N19-1441-08	WASHER		
143	2A		N19-1435-05	FLAT WASHER		
145	3A		G01-3806-18	SPRING (MD-H)		
146	3A		G01-3807-18	SPRING (MD-G)		
148	3A		G01-3663-08	SPRING (CAM)		
149	2B		G01-3664-08	SPRING (LOCK)		
150	2A		G01-3931-08	SPRING (BRAKE)		
151	2A		G01-3768-08	SPRING (LIFT)		
152	1A,1B		G16-0821-04	SHEET (TRAY)		
153	3B		G16-0856-08	FILAMENT TAPE		

L : Scandinavia **K** : USA **P** : Canada **R** : Mexico **C** : China **I** : Malaysia
Y : PX(Far East, Hawaii) **T** : Europe **E** : Europe **G** : Germany **V** : China (Shanghai)
Y : AAFES(Europe) **X** : Australia **Q** : Russia **H** : Korea **M** : Other Areas

⚠ indicates safety critical components.

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

33

Ref. No	Address	New Parts	Parts No.	Description	Destination	Remarks
155	2A		J02-1133-08	INSULATOR		
156	2B		J11-0813-08	CLAMPER		
157	1B		J19-3758-08	BRACKET (CLAMP)		
158	2B		J19-3660-08	BRACKET (GEAR)		
159	2B,3B		J19-3661-08	BRACKET (TRAY)		
160	3B		J61-0081-05	SK BINDER SKB-100		
161	1A		J99-0541-08	TRAY (SLIDE)		
162	1A		J99-0542-08	TRAY (ROTARY)		
163	2A		J90-0844-03	GUIDE (RAIL)		
L			N09-2658-08	SCREW		
M			N09-3053-08	SCREW		
N			N09-3107-08	SCREW		
P			N09-3140-08	SCREW		
Q			N09-3141-08	SCREW		
165	2B		S33-2061-05	LEVER SWITCH		
166	1A,2A		S64-0025-08	LEVER SWITCH MXS00621NLBO		
167	3A		S74-0065-05	LEAF SWITCH		
171	1B		T99-0544-05	MAGNET		
DM	3A		A11-1114-08	T T CHASSIS ASSY		
FM	3A		T42-0872-08	FEED MOTOR ASSY		
LM	3B		T42-0682-08	MOTOR PULLEY ASSY		
PU	3A		T25-0050-05	PICKUP (KCP1H)		
RTM	2B		T42-0683-08	MOTOR WORM ASSY		
CASSETTE DECK MECHANISM (D40-1588-08)						
401	1D		A10-3340-08	CHASSIS		
402	2C		A10-3350-08	HEAD CHASSIS		
403	1E		A11-1119-08	MECHA BASE ASSY		
404	2E		D01-0201-08	FLYFWHEEL ASSY (R)		
405	1C		D01-0202-08	FLYFWHEEL ASSY (L)		
406	2D		D10-3711-08	INTER LOCK ARM (BR)B		
407	1C		D10-3712-08	INTER LOCK ARM (BL)A		
408	2E		D10-3717-08	TRIGGER ARM		
409	2E		D10-3718-08	BRAKE ARM		
410	2D		D13-1809-08	CAM GEAR		
411	1E		D13-1810-08	IDLER GEAR (REM)		
412	1D		D13-1811-08	IDLER GEAR		
413	1C,2C		D13-1813-08	RETURN GEAR		
414	1C,2C		D13-1814-08	ROTATOR		
415	1C,2E		D13-1812-08	REEL GEAR		
416	2D		D14-0387-08	PINCH ASSY (R)		
417	2C0		D14-0388-08	PINCH ASSY (L)		
418	1D		D15-0400-08	PULLEY GEAR		
419	2E		D16-0716-08	DRIVE BELT		
420	2E		D16-0717-08	CLUTCH BELT (W)		
421	1D		D19-0306-08	CLUTCH ASSY		
422	2C		D23-0329-08	HOUSING ASSY (L)		
423	2D		D23-0330-08	HOUSING ASSY (R)		
424	1D,1E		B30-2409-08	LED		
425	1E		E35-2172-08	15P FLAT RIBBON WIRE		
427	1E		E35-1818-08	MOTOR WIRE		
429	1C,2D		G01-3709-08	B.T SPRING		
430	2E		G01-3990-08	TRIGGER ARM SP		
431	1D		G01-3991-08	CLUTCH ARM SP		
432	2C		G01-3992-08	HERD RETURN SP		

L : Scandinavia **K** : USA **P** : Canada **R** : Mexico **C** : China **I** : Malaysia
Y : PX(Far East, Hawaii) **T** : Europe **E** : Europe **G** : Germany **V** : China (Shanghai)
Y : AAFES(Europe) **X** : Australia **Q** : Russia **H** : Korea **M** : Other Areas

⚠ indicates safety critical components.

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

34

Ref. No	Address	New Parts	Parts No.	Description	Destination	Remarks
433	2D		G01-3993-08	HERD CHASSIS SP		
434	1C,2C		G01-3994-08	RETURN GEAR SP		
435	1C,2C		G01-3995-08	EARTH SP		
436	1C		G01-3996-08	INTER LOCK SP (BL)		
437	1C,2D		G01-3997-08	INTER LOCK SP (C)		
438	2E		G01-3998-08	BRAKE ARM SP		
439	2D		G01-3999-08	INTER LOCK SP (BR)		
440	1D		G02-0913-08	PACK SP		
441	1C,2C		G02-1623-08	AZIMUTH PLATE		
442	1C,2C		G11-2100-08	HEAD WIRE CLAMP		
443	1E		J19-5929-08	CABLE HOLDER		
444	2C		E35-1819-08	HEAD WIRE		
445	2C		E35-1821-08	HEAD WIRE		
446	2D		J21-6473-08	H/D RETURN PLATE		
447	1C,2C		J21-6474-08	HEAD PLATE		
450	1C,2C		J31-0877-08	ROTATOR COLLAR		
451	1C,2C		J39-0200-08	HEAD BASE		
452	1C,2D		J42-0183-08	REEL BUSH		
453	2E		J69-0086-08	FILAMENT TAPE		
454	2D		J90-0849-08	CASSETTE GUIDE		
455	1C,2D		D19-0270-08	REEL CAP (A)		
473	1D,1E		RD14BB2C222J	RESISTOR 2.2ohm		
475	1E		S74-0033-08	REC SWITCH		
476	1E		S74-0042-08	PLAY SWITCH		
479	1E		T42-0919-08	MOTOR ASSY		
480	1E		T94-0239-08	SOLENOID ASSY		
481	1E		T95-0154-08	PHOTO INTERRUPTER		
CA			N09-3372-08	HEAD SCREW		
CB			N09-1497-08	TAP TITE SCREW 2X5		
CC			N09-3384-08	TAPPING SCREW 1.7X8		
CD			N09-2877-08	TAPTITE SCREW 2X4		
CE			N09-2900-08	BIND TAPPING SCREW 2X6		
CF			N35-2604-08	BINDING SCREW 2.6X4		
CG			N09-3112-08	AZIMUTH SCREW		
CH			N09-3371-08	SCREW (CAM)		
CJ			N19-1439-08	POLY MASHER 4X7X.04CUT		
CK			N19-1355-08	NYLON WASHER 1.9X5X0.5		
CL			N19-1354-08	NYLON WASHER 2.19X5.5X0.5		
CM			N19-1387-08	TEFRON WASHER 4.1X5.5X0.25		
CN			N19-1384-08	POLY WASHER 2.1X5X0.25		
CP			N19-1388-08	POLY WASHER 1.57X4X0.5CUT		
CQ			N19-1385-08	POLEY WASHER 2.3X4X0.25		
CR			N09-3366-08	SCREW (INTER LOCK)		
CS			N19-1316-08	POLY WASHER 1.8X6X0.5CUT		
CT			N19-1288-08	POLY WASHER 1.57X5X0.5CUT		
CU			N09-0832-08	TAPTITE SCREW 2.6X6		
PH	1C		T31-0077-08	POTATION HEAD		
RPEH	2C		T34-0352-08	ROTATION HEAD (RP) KC9142		

L : Scandinavia **K** : USA **P** : Canada **R** : Mexico **C** : China **I** : Malaysia
Y : PX(Far East, Hawaii) **T** : Europe **E** : Europe **G** : Germany **V** : China (Shanghai)
Y : AAFES(Europe) **X** : Australia **Q** : Russia **H** : Korea **M** : Other Areas

⚠ indicates safety critical components.

HOW TO READ THE PARTS LIST

ABBREVIATION OF MODEL AND MASS PRODUCTION'S DESTINATIONS

MODEL	*ABB.*	*Australia*	*Canada*	*China*	*England*	*Europe*	*Germany*	*Korea*	*Malaysia*
RXD-501	5	X	-	-	T	E	-	-	-
RXD-501W		-	-	-	-	-	-	-	-
RXD-501E		-	-	-	-	E2	-	-	-
RXD-551		X	-	-	T	E	-	-	-
RXD-551W		-	-	-	-	-	-	-	-
RXD-551E		-	-	-	-	E2	-	-	-
RXD-571S		-	-	-	-	-	-	-	-
RXD-A5		-	P	-	-	-	-	-	-
RXD-701	7	X	-	-	T	E	-	-	-
RXD-701W		-	-	-	-	-	-	-	-
RXD-701E		-	-	-	-	E2	-	-	-
RXD-751		X	-	-	T	E	-	-	-
RXD-751W		-	-	-	-	-	-	-	-
RXD-751E		-	-	-	-	E2	-	-	-
RXD-771S		-	-	-	-	-	-	-	-
RXD-A8		-	P	-	-	-	-	-	-

MODEL	*ABB.*	*Mexico*	*PX/AAFES*	*Russia*	*Scandinavia*	*Shanghai*	*USA*	*Other area*	
RXD-501	5	-	-	-	-	-	-	-	-
RXD-501W		-	-	Q	-	-	-	-	-
RXD-501E		-	-	-	-	-	-	-	-
RXD-551		-	Y	-	-	-	-	M	-
RXD-551W		-	-	Q	-	-	-	-	-
RXD-551E		-	-	-	-	-	-	-	-
RXD-571S		-	-	-	-	-	-	M2	-
RXD-A5		-	-	-	-	-	K	-	-
RXD-701	7	-	-	-	-	-	-	-	-
RXD-701W		-	-	Q	-	-	-	-	-
RXD-701E		-	-	-	-	-	-	-	-
RXD-751		-	Y	-	-	-	-	M	-
RXD-751W		-	-	Q	-	-	-	-	-
RXD-751E		-	-	-	-	-	-	-	-
RXD-771S		-	-	-	-	-	-	M2	-
RXD-A8		-	-	-	-	-	K	-	-

RXD-501/551/571/A5/701/751/771/A8

SPECIFICATIONS

Main unit

[Amplifier section]

(RXD-A8/RXD-7...*Series*)

Rated power output (U.S.A. and Canada)

100 watts per channel minimum RMS, both channels driven, at 6 Ω from 40Hz to 14kHz with no more than 0.9 % total harmonic distortion.

Effective output power during STEREO operation
- **U.S.A. and Canada**
  - **FRONT (1 kHz , 0.9 % T.H.D.,6 Ω) ..... 100 W + 100 W**
  - **Sub woofer (60 Hz , 0.9 % T.H.D.,12Ω // 12 Ω) ..... 100 W**
- **Other countries**
  - **FRONT (1 kHz , 10 % T.H.D.,6 Ω) ..... 135 W + 135 W**
  - **Sub woofer (60 Hz , 10 % T.H.D.,12Ω // 12 Ω) ..... 135 W**

Rated output power during STEREO operation
- **Europe, U.K.** and Russia
  - **(DIN)1 kHz , 0.7 % T.H.D.,6 Ω, ... 100 W + 100 W**
- **Other countries**
  - **1 kHz , 1.0 % T.H.D.,6 Ω, ... 115 W + 115 W**

(RXD-A5/RXD-5...*Series*)

Rated power output (U.S.A. and Canada)

70 watts per channel minimum RMS, both channels driven, at 6 Ω from 40Hz to 14kHz with no more than 0.9 % total harmonic distortion.

Effective output power during STEREO operation
- **1 kHz , 10 % T.H.D.,6 Ω, ... 100 W + 100 W**

Rated output power during STEREO operation
- **Europe, U.K.** and Russia
  - **(DIN)1 kHz , 0.7 % T.H.D.,6 Ω, ... 80 W + 80 W**
- **Other countries**
  - **1 kHz , 1.0 % T.H.D.,6 Ω, ... 95 W + 95 W**

Signal to noise ratio
- **AUX ..... 90 dB**

Input sensitivity / impedance
- **AUX ..... 400 mV / 47kΩ**
- **MIC 1, 2 (Except for some arears) ..... 2.5 mV / 22 kΩ**

Output level / impedance
- **AUX (Except for U.S.A. and Canada) ..... 0.5 V / 3.3 kΩ**
- **(RXD-A5/RXD-5...*Series*)**
- **SUPER WOOFER PREOUT ..... 1.8 V / 3.3 kΩ**

[Tuner section]

FM tuner section
- **Tuning frequency range ..... 87.5 MHz ~ 108 MHz**
- **(For Russia) ..... 65.0 MHz ~74.0 MHz**

MW (AM) tuner section

Tuning frequency range
- **Europe, U.K. and Russia ..... 531 kHz ~ 1,602 kHz**
- **Other countries**
  - **9kHz step ..... 531 kHz ~ 1,602 kHz**
  - **10kHz step ..... 530 kHz ~ 1,610 kHz**
- **U.S.A. and Canada ..... 530 kHz ~ 1,700 kHz**

LW tuner section (For the United Kingdom and Russia)

Tuning frequency range ..... 153 kHz ~ 279 kHz

SW tuner section (RXD-771S/RXD-571S)

Tuning frequency range ..... 5.9MHz ~17.9MHz

[Cssette deck section]
- **Track ..... 4-track,2-channel stereo**
- **Recording system ..... AC bias system (Frequency: 105 kHz)**

Heads
- **A deck Playback head 1**
- **B deck Playback / recording head 1**
- **Erasing head 1**

Motors 2

Fast winding time ..... Approx. 115 seconds (C-60 tape)

[CD player section]
- **Laser ..... Semiconductor laser**
- **Wow & flutter ..... Less than unmeasurable limit**

(Except for U.S.A. and Canada)
- **Digital output (Optical) ..... −15 dBm ~ −21 dBm (Wave langth 660 nm)**

[General]
- **Power consumption ..... (RXD-7...*Series*) 210 W**
  (RXD-A8/RXD-A5/RXD-5...*Series*) 200 W
- **Dimensions ..... W : 280 mm (11")**
  H : 332 mm (13-1/16")
  D : 344 mm (13-9/16")
- **Weight (net) ..... (RXD-A8/RXD-7...*Series*) 11.1 kg (24.5 lb)**
  (RXD-A5/RXD-5...*Series*) 10.5 kg (23.1 lb)

1. KENWOOD follows a policy of continuous advancements in development. For this reason specifications may be changed without notice.
2. The full performance may not be exhibited in extremely coud location (under a water-freezing temperature).

Note:

Component and circuit are subject to modification to insure best operation under differing local conditions. This manual is based on Europe (E) standard, and provides information on regional circuit modification through use of alternate schematic diagrams, and information on regional component variations through use of parts list.

KENWOOD CORPORATION
14-6,Dogenzaka 1-chome, Shibuya-ku, Tokyo, 150-8501 Japan

KENWOOD SERVICE CORPORATION
P.O BOX 22745, 2201 East Dominguez St., Long Beach, CA 90801-5745, U.S.A.

KENWOOD ELECTRONICS CANADA INC.
6070 Kestrel Road, Mississauga, Ontario, Canada L5T 1S8

KENWOOD ELECTRONICS LATIN AMERICA S.A.
P.O BOX 55-2791, Piso 6 plaza Chase, Cl. 47 y Aquilino de la Guardia Panama, Republic de Panama

KENWOOD ELECTRONICS BRASIL LTDA.
Av Indianópolis, 628, 04062-001 Planalto Paullsta São Paulo-SP-Brasil

KENWOOD ELECTRONICS U.K. LIMITED
KENWOOD House, Dwight Road, Watford, Herts., WD1 8EB., United Kingdom

KENWOOD ELECTRONICS BELGUM N.V.
Meachelsesteenweg 418, B-1930 Zaventem, Belgium

KENWOOD ELECTRONICS DEUTSCHLAND GMBH
Rembrücker Str. 15, 63150 Heusenstamm, Germany

KENWOOD ELECTRONICS FRANCE S.A.
13 Boulevard Ney, 75018 Paris, France

KENWOOD ELECTRONICS ITALIA S.p.A.
Via G. Sirtori, 7/9 20129, Milano, Italy

KENWOOD IBÉRICA S.A.
Bolivia, 239-08020 Barcelona, Spain

KENWOOD ELECTRONICS AUSTRALIA PTY. LTD.
(A.C.N. 001499 074)
P.O Box 504, 8 Figtree Drive, Australia Centre, Homebush, N.S.W. 2140, Australia

KENWOOD & LEE ELECTRONICS, LTD.
Unit 3712-3724, Level 37, Tower 1, Metroplaza, 223 Hing Fong Road, Kwai Fong N.T., Hong Kong

KENWOOD ELECTRONICS GULF FZE
P.O.Box 61318, Jebel Ali, Dubai, U.A.E.

KENWOOD ELECTRONICS SINGAPORE PTE LTD.
No. 1 Genting Lane #02-02, KENWOOD Building, Singapore, 349544

KENWOOD ELECTRONICS (MALAYSIA) SDN BHD.
#4.01 Level 4, Wisma Academy Lot 4A, Jalan 19/1 46300 Petaling Jaya Selangor Darul Ehsan Malaysia

KENWOOD ELECTRONICS (THAILAND) CO., LTD.
573/111 Soi Ramkhamhaeng 39, Ramkhamhaeng Road, Wangthonglang, Bangkapi, Bankok 10301 Thailand